



*IR Illuminators Sold Separately



Product	INVID-IRILLUMBRACKET-2
IP Rating	IP66(Outdoor)
Wave Length	850nm
IR Projecting Angle	30°~60°(Outdoor)
IR LED	2×20pcs super high power IR LED
Emissive Power	2×42W
Available IR Distance	656-787 ft (200-240M) (Outdoor)
Control	CDS/Adjustable
Power Supply	DC12V±10%/AC24V±10%
Current Consumption	DC3000mA×2/ AC1850mA×2(Max)
Dimension	ø 10.9 x 7 x 6.3 in (276x178 x 160mm)
Weight	8 lb (3620g)
Storage Temperature	-22°F~+140°F (-30°C~+60°C)
Operating Temperature	-22°F~+104°F (-30°C~+40°C)

INVID-IRILLUMBRACKET-2

2 Panel IRILLUM Bracket

Features

- High efficiency cooling structure aluminum case, IP66
- 2×20pcs super high power IR LED
- Adjustable IR intensity
- IR angle: 30°~60°(Outdoor)
- IR distance: 656-787 ft (200~240M) (Outdoor)
- Power supply: DC12V/AC24V
- Indoor and outdoor use available

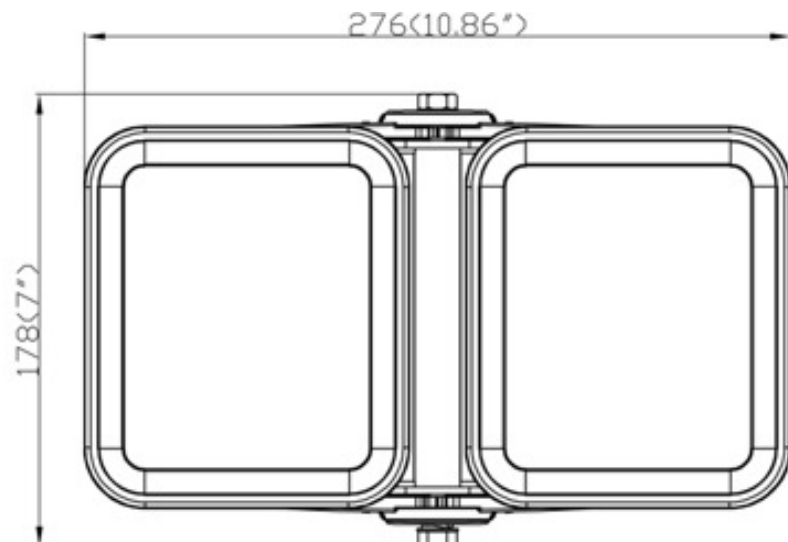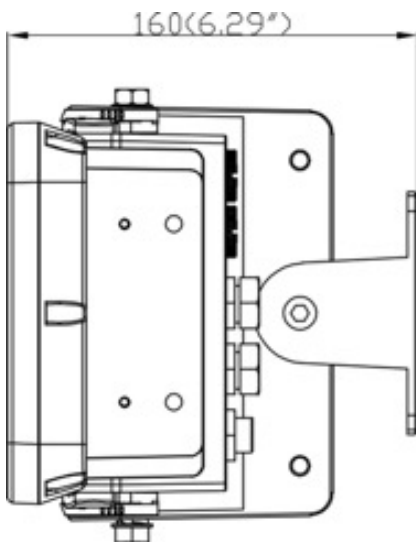

Ordering Information

INVID-IRILLUMBRACKET-2: 2 Panel IRILLUM Bracket

InVid Tech, reserves the right to make changes to improve our products at any time without notice; we are not responsible for misprints.