



\*IR Illuminators Sold Separately


## INVID-IRILLUMBRACKET-3 (3 Panels)

### 3 Panel IRILLUM Bracket

#### Features

- High efficiency cooling structure aluminum case, IP66
- 3 x 20pcs super high power IR LED
- Adjustable IR intensity
- IR angle: 30°~90°(Outdoor)
- IR distance: 656-918 ft (200~280M) (Outdoor)
- Power supply: DC12V/AC24V
- Indoor and outdoor use available

Product	INVID-IRILLUMBRACKET-3
IP Rating	IP66 (Outdoor)
Wave Length	850nm
IR Projecting Angle	30°~90°(Outdoor)
IR LED	3 x 20pcs super high power IR LED
Wave Length	850nm
Emissive Power	3x42W
Available IR Distance	656-918 ft (200~280M)(Outdoor)
Control	CDS/Adjustable
Power Supply	DC12V±10%/AC24V±10%
Current Consumption	DC3000mA×3/ AC1850mA×3(Max)
Dimension	ø (425x187.5 x 220mm)
Weight	(5640g)
Storage Temperature	-22°F~+140°F (-30°C~+60°C)
Operating Temperature	-22°F~+104°F (-30°C~+40°C)

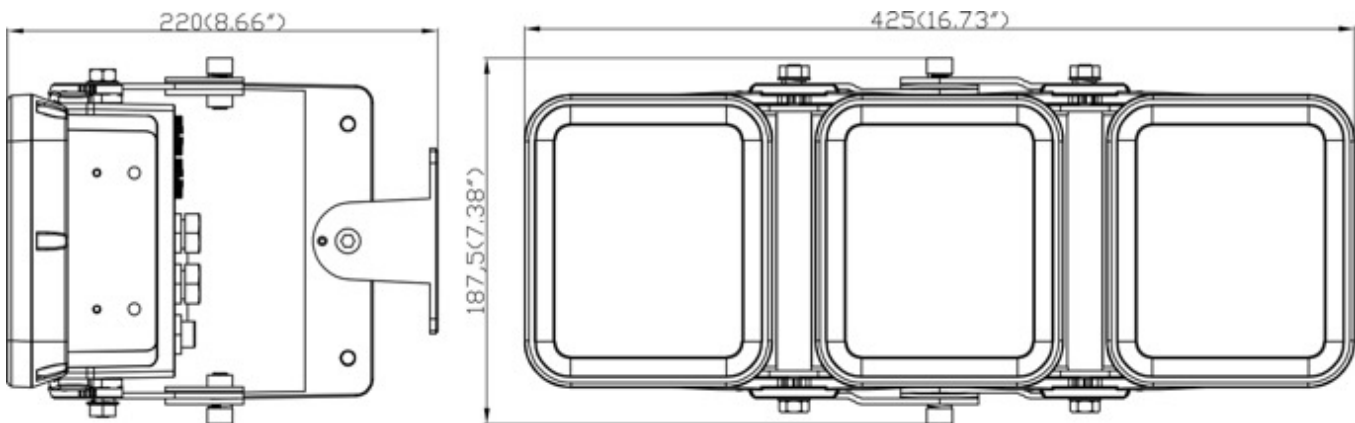

#### Ordering Information

**INVID-IRILLUMBRACKET-3:** 3 Panel IRILLUM Bracket