




IMHD4K-55N


55" Ultra High Definition 4K Monitor 3840 x 2160 Image
HDMI, VGA, DisplayPort, Built for 24/7 Performance

Features

- Built for 24/7 performance, ensuring continuous, reliable video surveillance for critical security environments
- Portrait Mode Support
- Superior Ultra High Definition 4K Image: 3840 x 2160
- Thin Bezel Frame for Maximized Viewing Area
- Bright Illuminated Panel with 178° Viewing Angle
- Inputs: HDMI x 2, VGA, DisplayPort, Audio
- 1.06 Billion Color Capacity
- VESA Mount 400 x 200

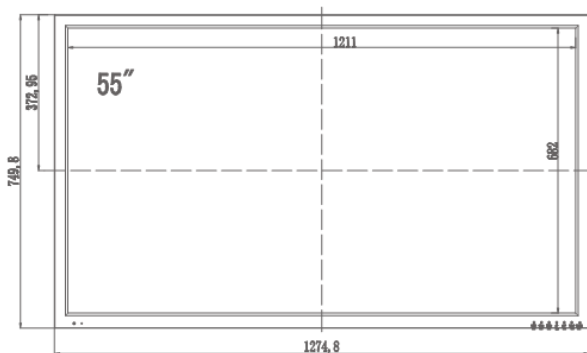

Unit:mm

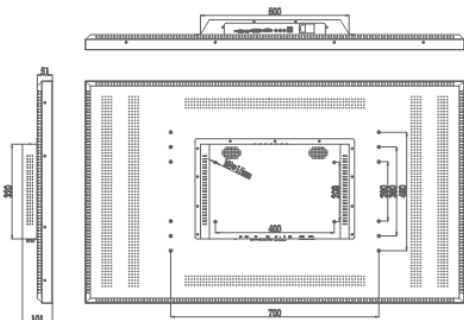

Display	IMHD4K-55N
Screen diagonal dimension	55 inch
Viewable area W x H	47.68 in X 26.34 in
Led Type	DLED
Screen Maximum Resolution	3840 x 2160
Supported input Resolutions	720x400; 640x480; 800x600; 1024x768; 1280x1024; 1920x1080; 3840x2160
Refresh Rate (vertical Frequency)	60 Hz
Color Depth	10bit(D), 1.06Billion colors
Brightness	Typical 450 cd/m ² , Max 500 cd/m ²
Auto Adjust	Yes
Monitor Aspect Ratio	16:9
Display Aspect Ratio	OSD selectable16:9 or 4:3
Horizontal TV Lines	1080
Contrast Ratio	3000:1
Response Time (ms)	8
View Angle (H/V)	178°/178°
Digital Video Inputs	HDMI DP up to 3840x2160
Port inputs	DP + HDMI*2 + VGA + AUDIO + RS232 IN
Port outputs	RS232 OUT
Speakers	8 Ω 5 Watt/channel
De-interlace & Noise Reduction	3D De-interlace
OSD Languages	English, Spanish, German, Chinese, French, Italian
Case & stand material	Metal
VESA Mounting Pattern	location centered on monitor body 400 x 200
Net Weight	48.5 lbs (22kg)
Gross Weight	50.7 lbs (23kg)
Power- Watts(on and standby)	<160W
Power input	100 ~ 240V AC
Operating Temperature	32°F ~ 104°F (0°C ~ 40°C)
Storage Temperature	-4°F ~ 140°F (-20°C ~ 60°C)
Operating Humidity	10 ~ 85%
Certifications	CE, FCC, HDMI Forum
Dimension size	50.2 x 29.5 x 4 in (1275*750*101mm)

Ordering Information

IMHD-55N: 55" HDMI Monitor