





IMHD4K-55NP

55" Ultra High Definition 4K Plastic Case Monitor, 3840 x 2160 Image
HDMI, VGA, DisplayPort, Built for 24/7 Performance

Features

- Built for 24/7 performance, ensuring continuous, reliable video surveillance for critical security environments
- Portrait Mode Support
- Superior Ultra High Definition 4K Image: 3840 x 2160
- Thin Plastic Bezel Frame for Maximized Viewing Area
- Bright Illuminated Panel with 178° Viewing Angle
- Inputs: HDMI x 2, VGA, DisplayPort, Audio
- 1.06 Billion Color Capacity
- VESA Mount 200 x 200

Display	IMHD4K-55NP
Screen diagonal dimension	55 inch
Viewable area W x H	47.68 in X 26.34 in
Led Type	TFT-LED
Screen Maximum Resolution	3840 x 2160
Supported input Resolutions	720x400; 640x480; 800x600; 1024x768; 1280x1024; 1920x1080; 3840x2160
Refresh Rate (vertical Frequency)	60 Hz
Color Depth	10bit(D), 1.06Billion colors
Brightness	Typical 450 cd/m², Max 500 cd/m²
Auto Adjust	Yes
Monitor Aspect Ratio	16:9
Display Aspect Ratio	OSD selectable 16:9 or 4:3
Horizontal TV Lines	1080
Contrast Ratio	3000:1
Response Time (ms)	8
View Angle (H/V)	178°/178°
Digital Video Inputs	HDMI DP up to 3840x2160
Port inputs	DP + HDMI*2 + VGA + AUDIO + RS232 IN
Port outputs	RS232 OUT
Speakers	8 Ω 5 Watt/channel
De-interlace & Noise Reduction	3D De-interlace
OSD Languages	English, Spanish, German, Chinese, French, Italian
Case & stand material	Plastic
VESA Mounting Pattern	location centered on monitor body 200 x 200
Net Weight	20 lbs (9kg)
Gross Weight	27 lbs (12kg)
Power- Watts(on and standby)	<160W
Power input	100 ~ 240V AC
Operating Temperature	32°F ~ 104°F (0°C ~ 40°C)
Storage Temperature	-4°F ~ 140°F (-20°C ~ 60°C)
Operating Humidity	10 ~ 85%
Certifications	CE, FCC, HDMI Forum
Dimension size	49.2 x 28 x 3.6 in (1250*710*92.5mm)

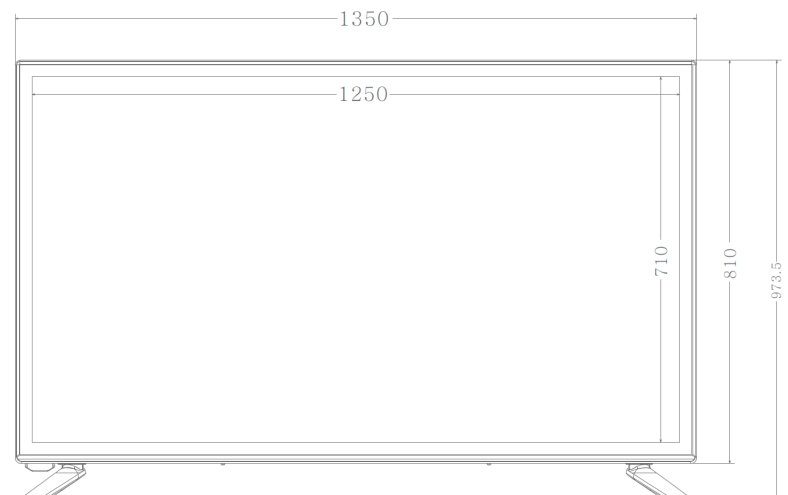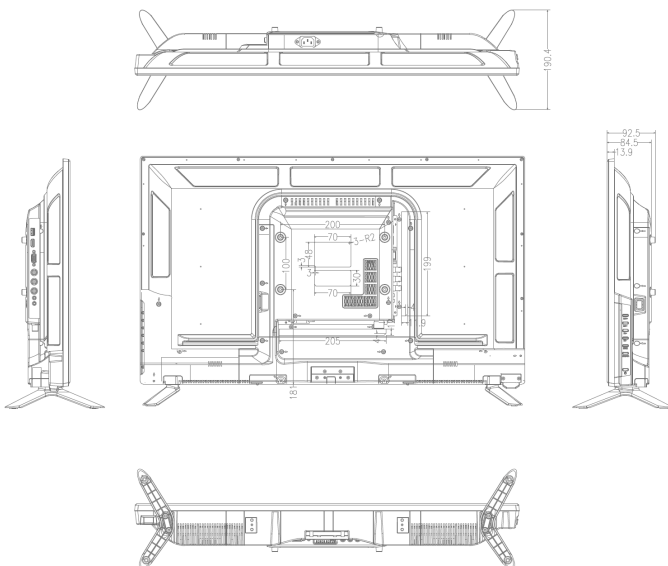

Ordering Information

IMHD4K-55NP: 55" Plastic Case Monitor