



INVID-IFP65N

65" Smart Interactive Display

Features

- 4K UHD anti-glare display delivers images with extreme detail.
- Zero lamination technology with less than 1mm gap between the cover glass and display panel effectively reduces light refraction and brings better visuals.
- · Ultra-narrow and equal-width bezel design for perfect aesthetics.
- Minimalist geometric line design and smooth border outline, elegant and attractive.
- (Optional) Professional 4K HD camera for immersive remote collaboration.
- (Optional) Omni-directional 8-microphone array with 8-meter pickup distance.
- Dual Wi-Fi modules with both Wi-Fi and hotspot support for other mobile devices.
- Dual treble channels and dual bass channels provide cinematic sound effects.
- High-precision infrared touch technology allows up to 50-point touch, realizing smooth co-authoring.
- Bluetooth 5.2 offers higher data transmission rate and lower power consumption.
- Android 13.0 system offers user-friendly GUI.
- A variety of quick tools improve usability and interaction efficiency, such as annotation, screenshot, etc.
- Wireless screen mirroring from various operating systems such as Android, iOS, and Windows to the display with one touch.
- Fast file transfer allows users to quickly transfer files to the display via a QR code.
- · OTA remote upgrade allows the system to be upgraded online.
- Supports NFC screen projection

Model	INVID-IFP65N
Panel	
Backlight	DLED backlight
Panel Size	65"
Resolution	3840 × 2160
Brightness (cd/m²)	350
Contrast Ratio	1200 : 1
Response Time (ms)	8
Color Support	1.07B
Viewing Angle (H/V)	178°/178°
Refresh rate Hz	60
Color gamut	72%
Lifespan	50000Н
Surface Hardness	9H (7 on the Mohs scale)
Haze Value	25%
Display Size	56 x 32" (1428.48 × 803.52mm)

InVid Tech, reserves the right to make changes to improve our products at any time without notice; we are not responsible for misprints.

Orderina	Information
Ordering	iiiioiiiiatioi


INVID-IFP65N: 65" Smart Interactive Display


Pixel Pitch (H x V)	0.37 × 0.37 mm
Touch	
Touch Control	Contactless IR sensor, supports 50-point touch
Touch Precision (mm)	±1
Glass	4mm single-side anti-glare tempered glass
Touch Response Time (ms)	≤ 2 (frame rate > 500Hz)
Touch technology	Infrared touch
Writing Specification	Supports 20-point writing
System	
CPU	RK3588: quad-core A76 (2.4G) + quad-core A55 (1.8G)
CPU Frequency	2.4 GHz
RAM/ROM	DDR4: 8GB eMMC: 128GB
Operation System	Android 13.0
Interface	
Video Input	$2\times$ HDMI 2.0 video input; $1\times$ DP video input; $1\times$ VGA video input; $1\times$ YPbPr video input $1\times$ USB TypeC (include DP)
Video Output	1× HDMI video output; 1× DP video output
Audio Input	1 × PC audio input, 3.5mm interface 1 × LINE IN, 3.5mm interface 1 × MIC (3.5mm & EARPHONE Shared interface)
Other Interfaces	4 × USB3.0,1 × USB Type-B,1 × USB Type-C,1 × RS2321 × TF card slot
Network	2 × RJ45, supports 10M/100M/1000M Base-T self-adaptive
Front Interfaces	2 × front USB3.01 × Type-C
Audio	
Speaker	Left channel: 1× treble (5W) + 1× bass (12W) Right channel: 1× treble (5W) + 1× bass (12W)
Wi-Fi	
Wi-Fi Configuration	Wi-Fi 6 + Wi-Fi 5 dual modules: Wi-Fi 6 for uplink routing; Wi-Fi 5 as AP, supports 2.4GHz and 5GHz
Wi-Fi Performance	30m² coverage, 20m transmission distance in open space
Bluetooth	
Bluetooth Version	5.2
Bluetooth Performance	10m transmission distance in open space
OSD	
Multi-Language	Supports 27 languages, including Simplified Chinese, Traditional Chinese, English, Japanese, Arabic, French, Spanish (ES-ES), Spanish (ES-MX), Portuguese (ES-ES), Portuguese (ES-MX), German, Italian, Dutch, Polish, Korean, Catalan, Galician, Vietnamese, Bulgarian, Kazakh, Russian, Ukrainian, Thai, Uzbek, Hungarian, Croatian, and Romanian
VESA	
Wall Mount Hole	500 × 400mm
Wall Mount Screw	4-M8 screw hole
General	
Power Supply	AC 100 to 240 V, 50/60 Hz
Overall Power Consumption (W)	≤220 (on without OPS)
Standby Power Consumption (W)	<0.5
Product Dimensions (W x H x D)	59 x 35.6 x 3.5" (1498 × 905 × 89mm)
Package Dimensions (W x H x D)	64.3 × 42.6 × 8.7" (1632 × 1081 × 222 mm)
Operating Temperature	32°F ~ 122°F (0 to 50°C)
Weight	Net weight: 89.3 lbs (40.5Kg) Gross weight: 108 lbs(49.0Kg)
Operating Humidity	10% to 90% (non-condensing)
Storage Temperature	-4°F ~ 140°F (-20 to 60°C)
Storage Humidity	0% to 95% (non-condensing)
Accessories Included	1 × Power Cable, 2 × Touch Pen, 1 × Quick Guide, 1 × Infrared Remote Control, 1 × Wall Mount Bracket
Certification	
Certification	CE-EMC, CE-RED, CB/LVD, FCC, FCC-ID


See next page for more info!



Dimensions

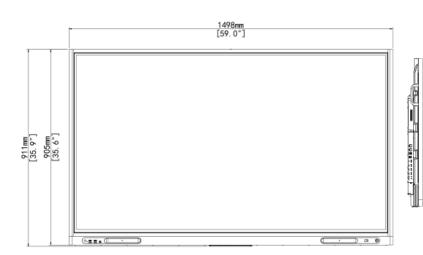










Interface

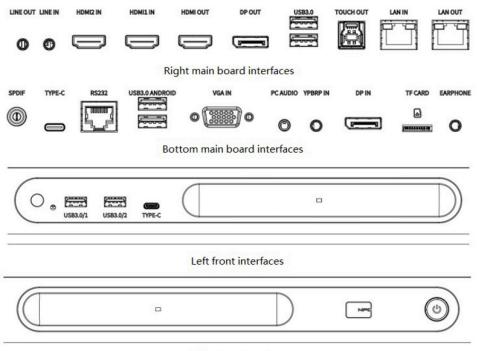

Right front interfaces