


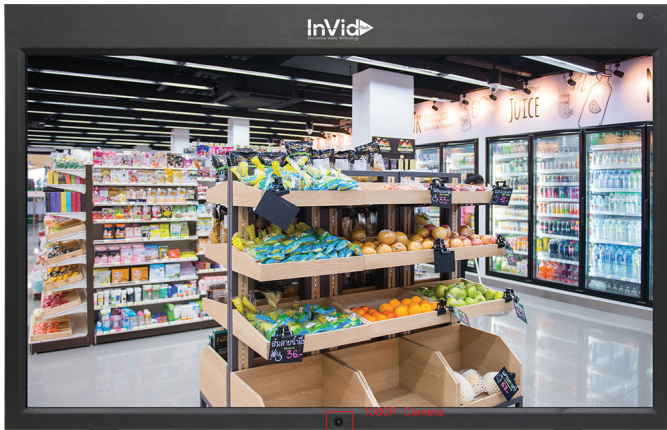


IMHD-27PVMPOE

27" HD IP PVM Monitor, 2 MP Built-in Camera, PoE++ Powered Monitor

Features

- Built for 24/7 performance, ensuring continuous, reliable video surveillance for critical security environments
- 27" HD Screen
- Built-in IP Camera with 2.8mm Lens Supports
- Powered by DC12V or PoE++. A PoE++ switch or injector is required. Minimum of 60-watts required
- VESA Mount 75x75 & 100x100

***IP Tool Needed (Secure Tools)**

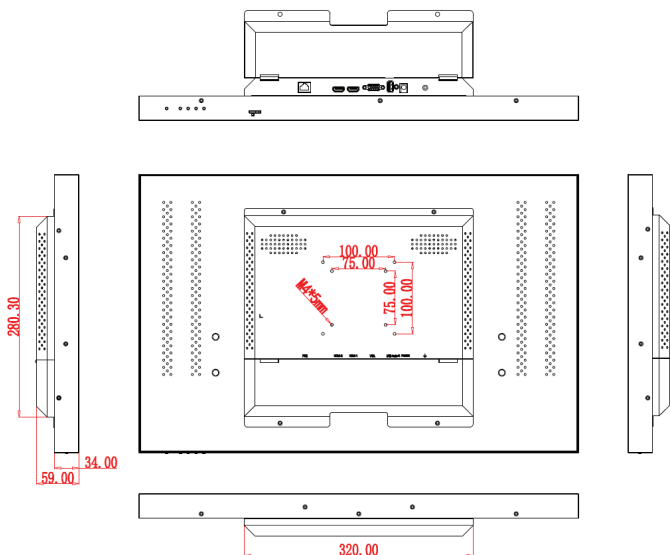

Ordering Information

IMHD-27PVM: 27" PVM Monitor

Model	IMHD-27PVM
Display Characteristics	
Screen Size	27"
Active Display Area (W x H)	620.93 x 341.3 mm
Display Mode	16:9
LED Type	TFT-LED
Resolution	1920 x 1080
Display Color	16.7M
Pixel Pitch (H x V)	0.294 x 0.294 mm
Brightness(nits)	350cd/M 2
Contrast Ratio	1000:1
Viewing Angle (H/V)	178/178
Response Time	5ms
Backlight	LED
Input & Output	
HDMI/VGA	2/1
Remote control	1
USB input (image input)	1
Network(POE)/Input	1
SD Card	Supported (up to 128GB)
Camera	

H.265 2.0mp IP Camera Module, support NDAA(with face detection)

1920 (H) X 1080 (V) approx. 2 million pixels

Main stream: 1920X1080, 1280X720 (1~25/30fps)

Support ONVIF/GB28181/SDK

Power & Mount Way	
Power	AC220V / POE++60watt input
Power Consumption	<40W
Working Temperature	-22°F ~ 185°F (-30°C ~ 85°C)
Menu	English(other languages supported)
Mounting	Stand mount, VESA mount 75x75 and 100x100
Dimension size	24.2 x 15.3 x 2.3 in (615*389*59mm)
Net Weight	26.5 lbs
Accessories	
Included Accessories	Industrial PSU,Screw, Cable holder, Quick start guide

