




*Image above is IMHD-10FLUSH with mounting ears

IMHD-10FLUSH

10" 1280×800 Flush Case Monitor

Features

- Industrial level DID LCD panel, suitable for extensive 24/7 continuous works
- Physical resolution of 1280×800
- 5ms fast response time, no image ghosting
- Adapt newest 3D digital filtering and 3D digital noise reduction technology
- Picture fast response; 178° wide viewing angle; Ensure that the image display is not deformed
- High fidelity digital processing, brilliant and vivid video
- Built-in speaker
- Humanize Menu; Convenient Controller
- VESA 75x75

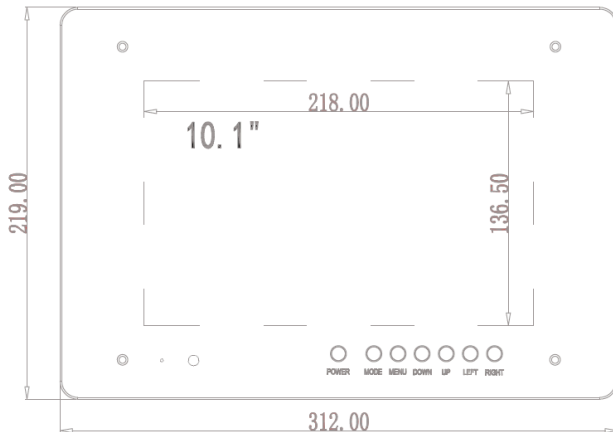

Ordering Information

IMHD-10FLUSH: 10" Flush Case Monitor

| Display Characteristics | |
|-----------------------------|---|
| Model Name | IMHD-10FLUSH |
| Screen Size | 10.1" |
| Active Display Area (W x H) | 211.2mm(W)×158.4mm(H) |
| Display Mode | 16:9 |
| LED Type | TFT-LED |
| Resolution | 1280 × 800 |
| Display Color | 16.7M |
| Pixel Pitch(mm) | 0.630(H)×0.630(V) |
| Brightness(nits) | 300cd/m ² |
| Contrast Ratio | 1000:1 |
| Viewing Angle | 178(H) /178(V) |
| Response Time | 5ms |
| Backlight | LED |
| Input & Output | |
| HDMI | 1 |
| VGA | 1 |
| BNC input | 2 |
| BNC output | 1 |
| Speaker | 2x3W(Stereo) |
| Video | |
| Color System | PAL/NTSC/SECAM |
| Compatible HDTV input | 480P,576P,720P,1080I, 1080P |
| 3D comb filter | Yes |
| Video Noise Reduction | Yes |
| Power & Mount Way | |
| Power | DC12V ,50/60Hz |
| Working Temperature | -22°F ~ 185°F (-30°C ~ 85°C) |
| Power Consumption | <9W |
| Menu | English(other languages supported) |
| Mounting/Weight | Stand mount, VESA mount/ 6.6lb (3kg) |
| MTBF | 50000Hours |
| Accessories | |
| Included Accessories | Industrial PSU,Screw, Cable holder, Quick start guide |

