Display Characteristics	
Model Name	IMHD-15FLUSH
Screen Size	15''
Active Display Area (W x H)	304.128 × 228.096mm
Display Mode	5:4
LED Type	TFT-LED
Resolution	1024 × 768
Display Color	16.7M
Pixel Pitch(mm)	0.630(H)×0.630(V)
Brightness(nits)	300cd/m 2
Contrast Ratio	800:1
Viewing Angle	178(H) /178(V)
Response Time	5ms
Backlight	LED
Input & Output	
HDMI	1
VGA	1
BNC input	2
BNC output	1
Video	
Color System	PAL/NTSC/SECAM
Compatible HDTV input	480P,576P,720P,1080I, 1080P
3D comb filter	Yes
Video Noise Reduction	Yes
Power & Mount Way	
Power	DC12V ,50/60Hz
Working Temperature	-22°F ~ 185°F (-30°C ~ 85°C)
Power Consumption	<13W
Menu	English(other languages supported)
Mounting/Weight	Stand mount, VESA mount/ 11lb (5kg)
MTBF	50000Hours
Accessories	
Included Accessories	Industrial PSU,Screw, Cable holder, Quick start guide
Dimension size	14.6 x 10.8 x 2.8 (371*275*70mm)

IMHD-15FLUSH

15" 1024×768 Flush Case Monitor, Built for 24/7 Performance

Features

- Built for 24/7 performance, ensuring continuous, reliable video surveillance for critical security environments
- Portrait Mode Support
- Physical resolution of 1024 x 768
- 5ms fast response time, no image ghosting
- Adapt newest 3D digital filtering and 3D digital noise reduction technology
- Picture fast response; 178° wide viewing angle; Ensure that the image display is not deformed
- High fidelity digital processing, brilliant and vivid video
- Humanize Menu; Convenient Controller
- VESA 75x75

Unit:mm

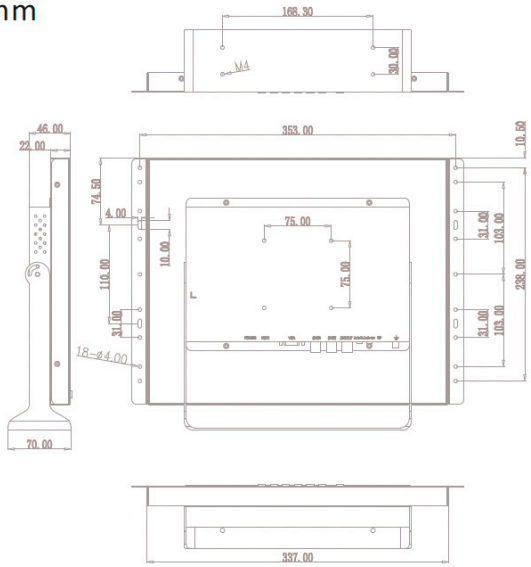

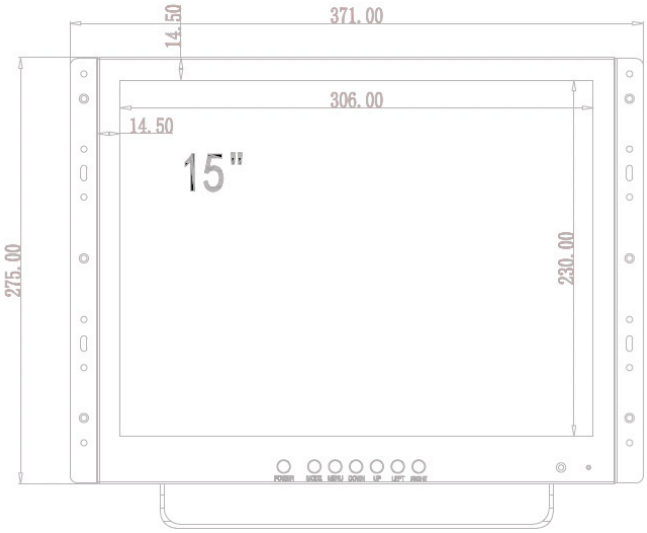

Ordering Information

IMHD-15FLUSH: 15" Flush Case Monitor

InVid Tech, reserves the right to make changes to improve our products at any time without notice; we are not responsible for misprints.