



IMHD-17FLUSH

17" 1280×1024 Flush Case Monitor

Features

- Industrial level DID LCD panel, suitable for extensive 24/7 continuous works
- Physical resolution of 1280×1024
- 5ms fast response time, no image ghosting
- Adapt newest 3D digital filtering and 3D digital noise reduction technology
- Picture fast response; 178° wide viewing angle; Ensure that the image display is not deformed
- High fidelity digital processing, brilliant and vivid video
- Built-in speaker
- Humanize Menu; Convenient Controller

Unit:mm

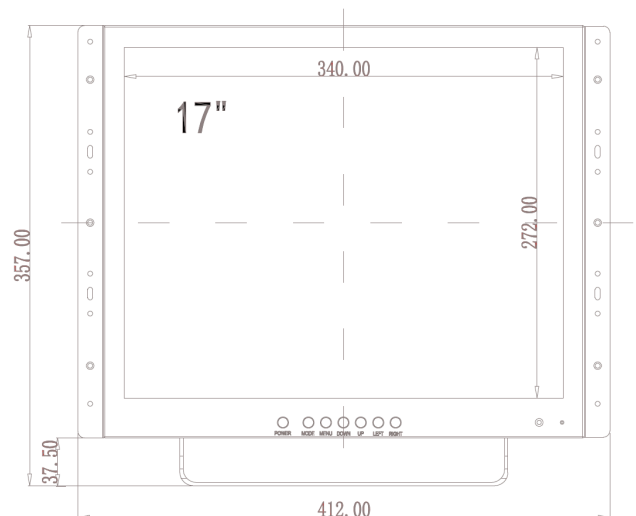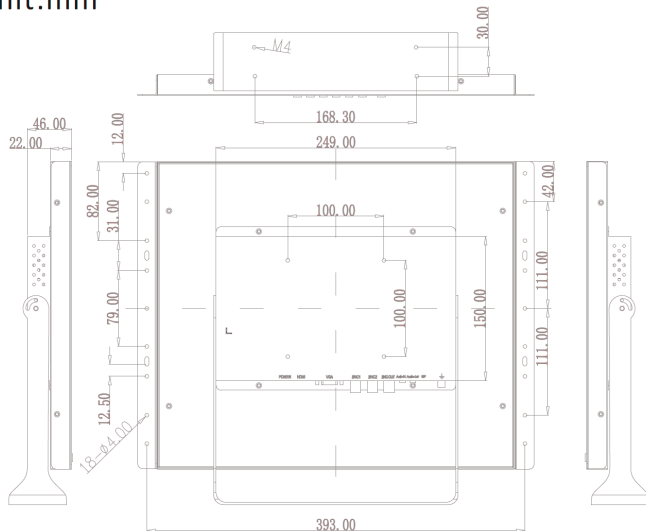

Ordering Information

IMHD-17FLUSH: 17" Flush Case Monitor

Display Characteristics	
Mode Name	IMHD-17FLUSH
Screen Size	17"
Active Display Area (W x H)	337.920mm × 270.336mm
Display Mode	5:4
LED Type	TFT-LED
Resolution	1280 × 1024
Display Color	16.7M
Pixel Pitch(mm)	0.264(H)×0.264(V)
Brightness(nits)	350cd/m ²
Contrast Ratio	1000:1
Viewing Angle	178(H) /178(V)
Response Time	5ms
Backlight	LED
Input & Output	
HDMI	1
VGA	1
BNC input	2
BNC output	1
Speaker	2x3W(Stereo)
Video	
Color System	PAL/NTSC/SECAM
Compatible HDTV input	480P,576P,720P,1080I, 1080P
3D comb filter	Yes
Video Noise Reduction	Yes
Power & Mount Way	
Power	DC12V ,50/60Hz
Working Temperature	-22°F ~ 185°F (-30°C ~ 85°C)
Power Consumption	<15W
Menu	Chinese/English(other languages supported)
Mounting/Weight	Stand mount, VESA mount/ 14.3lb (6.5kg) 75x75 and 100x100
MTBF	50000Hours
Accessories	
Included Accessories	Industrial PSU,Screw, Cable holder, Quick start guide