




IMHD-22HVBPOE

22" 1920 x 1080 LED Monitor, HDMI 2.0, VGA, RJ45 PoE Input, Looping BNC Inputs & Outputs, PoE Powered Monitor

Features

- 1920 x1080 Resolution
- LCD Panel
- Inputs: HDMI 2.0, VGA, RJ45 PoE, BNC (2)
- Outputs: BNC, RJ45 (Non-PoE)
- Powered by DC12V or PoE. A PoE plus switch or injector is required. Minimum of 30-watts required
- Additional LAN Port that does not have PoE. Works similarly to a single port unmanaged switch. Extend your network and connect a networkable device.
- 16.7 Million Color Capacity
- Built-in speaker
- VESA Mount Compatible

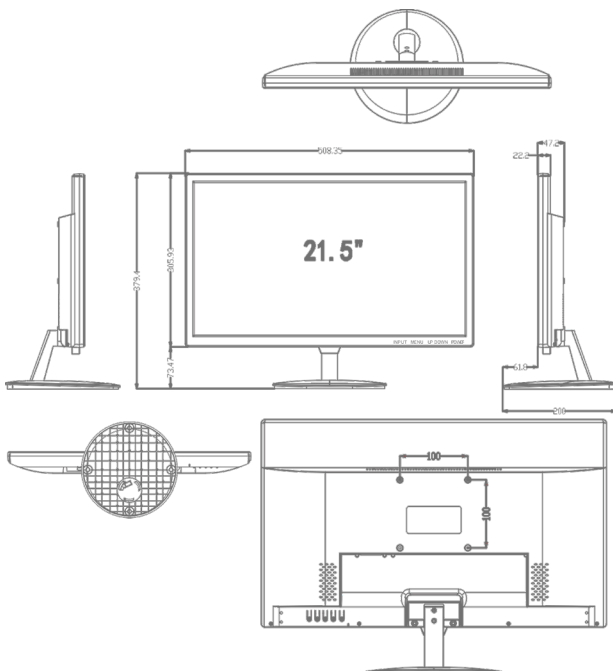

Ordering Information

IMHD-22HVBPOE: 22" PoE monitor

Display Characteristics	
Mode Name	IMHD-22HVBPOE
Screen Size	22"
Active Display Area (W x H)	18.8 in x 10.6 in (476.64mm x 268.11mm)
Display Mode	16:9
LED Type	TFT-LED
Resolution	1920 × 1080
Display Color	16.7M
Pixel Pitch (H x V)	0.248 × 0.248 mm
Brightness (nits)	250cd/m ²
Contrast Ratio	1000:1
Viewing Angle (H/V)	178 /178
Response Time	5ms
Backlight	LED
Input & Output	
HDMI 2.0	1
VGA	1
RJ 45 PoE input	1
RJ 45 signal output	1 (Non- PoE)
BNC input/output (CVBS,960H Only)	2/1 (Max Daisy Chain: 3 Monitors, Max Distance: 300ft)
Video	
Color System	PAL/NTSC/SECAM
OSD Control	Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, phase, Color, Language
3D comb filter	Yes
Video Noise Reduction	Yes
Power & Mount Way	
Power	DC12V,3A (Included) ,or POE Input AT Standard
Working Temperature	-22°F~ 185°F (-30°C~85°C)
Power Consumption	<25W
Menu	Chinese/English(other languages supported)
Mounting/Weight	Stand mount, VESA mount/3.5kg 22"/24" 100x100
MTBF	50000Hours
Accessories	
Included Accessories	Industrial PSU,Screw, Cable holder, Quick start guide