


## IMHD-22HVBPOE

22" 1920 x 1080 LED Monitor, HDMI 2.0, VGA, RJ45 PoE Input, Looping BNC Inputs & Outputs, PoE+ Powered Monitor

### Features

- 1920 x 1080 Resolution
- LCD Panel
- Inputs: HDMI 2.0, VGA, RJ45 PoE, BNC (2)
- Outputs: BNC
- Powered by DC12V or PoE+. A PoE+ switch or injector is required. Minimum of 30-watts required
- Additional LAN Port that does not have PoE. Works similarly to a single port unmanaged switch. Extend your network and connect a networkable device.
- 16.7 Million Color Capacity
- Built-in speaker
- VESA Mount 100x100

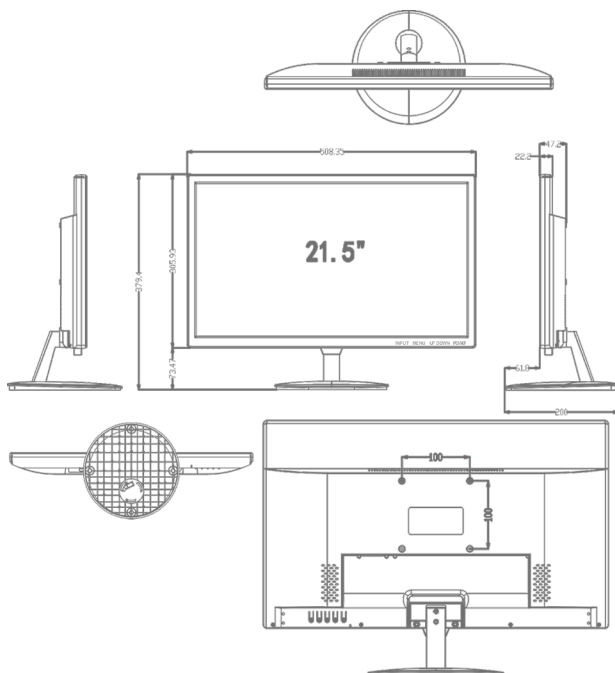

Display Characteristics	
Mode Name	IMHD-22HVBPOE
Screen Size	22"
Active Display Area (W x H)	18.8 in x 10.6 in (476.64mm x 268.11mm)
Display Mode	16:9
LED Type	TFT-LED
Resolution	1920 x 1080
Display Color	16.7M
Pixel Pitch (H x V)	0.248 x 0.248 mm
Brightness (nits)	250cd/m <sup>2</sup>
Contrast Ratio	1000:1
Viewing Angle (H/V)	178 /178
Response Time	5ms
Backlight	LED
Input & Output	
HDMI 2.0	1
VGA	1
RJ 45 PoE input	1
BNC input/output (CVBS,960H Only)	2/1 (Max Daisy Chain: 3 Monitors, Max Distance: 200ft)
Video	
Color System	PAL/NTSC/SECAM
OSD Control	Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, phase, Color, Language
3D comb filter	Yes
Video Noise Reduction	Yes
Power & Mount Way	
Power	DC12V,3A (Included) ,or POE+ Input AT Standard
Working Temperature	-22°F~ 185°F (-30°C~85°C)
Power Consumption	<25W
Menu	Chinese/English(other languages supported)
Mounting	Stand mount, VESA mount 22" 100x100
MTBF	50000Hours
Dimension size	20 x 12 x 1.9 in (508*305*47mm)
Net Weight	6.2 lbs (2.8kg)
Gross Weight	8.4 lbs (3.8kg)

### Ordering Information

**IMHD-22HVBPOE: 22" PoE monitor**