





IMHD-27ITA

27" Full HD 1920 x 1080 LED Monitor Inputs: HDMI, VGA, Built-in Speaker, Includes 12VDC Power Supply Brick, Built for 24/7 Performance

Features

- Built for 24/7 performance, ensuring continuous, reliable video surveillance for critical security environments
- Portrait Mode Support
- Full High Definition Quality: 1920 x 1080
- Inputs: HDMI, VGA
- Built-in Speaker
- Bright LED Illuminated Panel with Wide Viewing Angle
- 16.7 Million Color Capacity
- VESA Mount 75x75
- Includes 12VDC Power Supply Brick

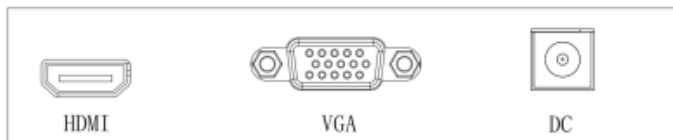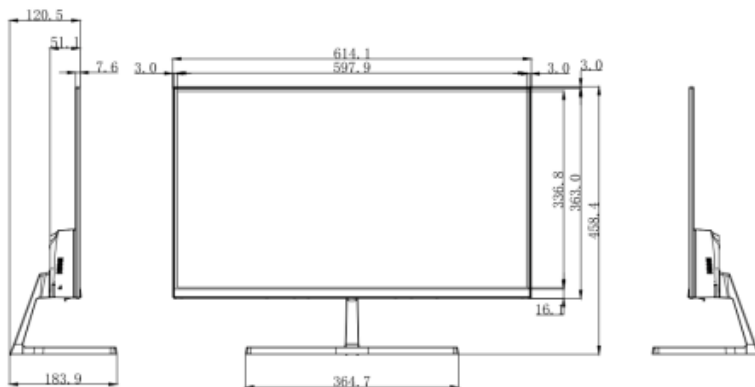

Ordering Information

IMHD-27ITA: 27" Monitor

Model	IMHD-27ITA
Panel	
Backlight	LED
Panel Size	27"
Pixel Pitch (H x V) (mm)	0.31 x 0.31
Resolution	1920 x 1080
Display Size (mm)	597.9 x 336.8
Color Support	16.7 M
Brightness (cd/m ²)	250
Contrast Ratio	4000:1
Refresh Rate	100 Hz
Response Time (ms)	5
Viewing Angle (H/V)	Horizontal 178°, Vertical 178°
Operation Hour	18/7
Interface	
Video Input	1 x HDMI(1920 x 1080@100 HZ), 1 x VGA(1920 x 1080@60 HZ)
Built-in Speaker	Yes
VESA	
VESA (mm)	75 x 75
Wall-mounted Thread	4-M4 Threaded Hole, 8mm Deep Thread
OSD	
Multi-Language	Chinese, English, German, French, Italian, Spanish, Portuguese, Turkish, Polish, Dutch, Japanese, Korean
General	
Input Voltage	DC 12 V, 3 A
Typical Power Consumption (W)	≤36
Standby Power Consumption (W)	≤0.5
Product Dimensions (W x H x D)	24.2 x 14.3 x 2 in (614.1 x 363.0 x 51.1mm)
Package Dimensions (W x H x D)	27.3 x 18 x 4.5 in (694 x 458 x 114mm)
Weight	Net Weight: 8.5lbs (3.84kg) Gross Weight: 11.6 lbs (5.25kg)
Operating Temperature	32°F ~ 104°F (0°C ~ 40 °C)
Operating Humidity	10% ~ 85% (No Condensation)
Storage Temperature	-4°F ~ 140°F (-20°C ~ 60°C)
Storage Humidity	5% ~ 90% (No Condensation)
Standard	1 x HDMI Cable, 1 x Quick Guide, 1 x Pedestal, 1 x Adapter

