




IMHD-27PVM

27" HD Analog PVM Monitor, (2) HDMI, VGA, RJ 45 PoE Input, BNC Output, 5 MP Built-in Camera, PoE++ Powered Monitor

Features

- 27" HD Screen
- Up to 5MP Resolution
- Built-in Camera with 2.8mm Lens Supports TVI/AHD/CVI/ CVBS
- Powered by DC12V or PoE++. A PoE++ switch or injector is required. Minimum of 40-watts required
- 350cd/m2
- (2) HDMI Input
- (1) VGA Input
- (1) BNC Output
- VESA Mount 75 x75 & 100x100

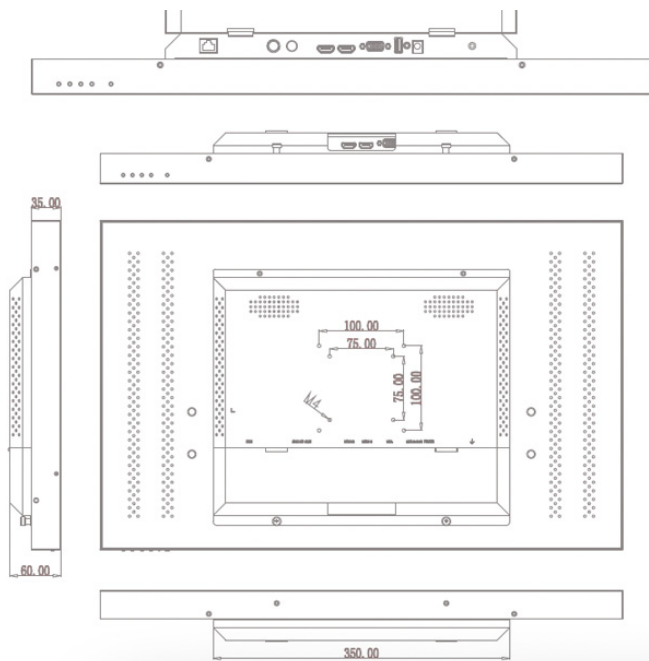

Ordering Information

IMHD-27PVM: 27" PVM Monitor

Display Characteristics	
Screen Size	27"
Active Display Area (W x H)	620.93 × 341.3 mm
Display Mode	16:9
LED Type	TFT-LED
Resolution	1920 × 1080
Display Color	16.7M
Pixel Pitch (H x V)	0.294 × 0.294 mm
Brightness(nits)	350cd/M 2
Contrast Ratio	1000:1
Viewing Angle (H/V)	178/178
Response Time	5ms
Backlight	LED
Input & Output	
HDMI	2
VGA	1
BNC (Signal output)	1
RJ 45 (POE Input)	1
Camera	
Lens	DC Iris 2.8 Fixed lens, SONY IMX335 SENSOR
Video Output	TVI: 5/4/2 MP AHD: 5/4/2 MP CVI: 4/2 MP
Video Output Default	TVI @5MP
Illumination	0.01Lux@(F1.2,AGC ON), 0LUX with IR Support IR-CUT switching
Power & Mount Way	
Power	DC12V ,50/60Hz, PoE++ Input, AT Standard
Working Temperature	-22°F ~ 185°F (-30°C ~ 85°C)
Power Consumption	<40W
Menu	Chinese/English(other languages supported)
Mounting	VESA mount 75x75 and 100x100
MTBF	50000Hours
Dimension size	24.3 x 15.3 x 2.4 in (617*389*60mm)
Net Weight	28.6 lbs (13kg)
Accessories	
Included Accessories	Industrial PSU,Screw, Cable holder, Quick start guide

