



## IMHD-43PVMMULTI

43" 1080P, (2) HDMI, VGA, Built-in Camera, Motion Detection Metal PVM Monitor


### Features

- 43" Screen Suitable for 24/7 Operation
- 1920 x 1080 Resolution
- Built-in Camera 1080P with 2.8mm Lens Supports SONY IMX335 SENSOR
- 350cd/m<sup>2</sup>
- (2) HDMI Input
- (1) VGA Input



Display Characteristics	
Screen Size	43"
Active Display Area (W x H)	941.184 × 529.146 (mm)
Display Mode	16:9
LED Type	TFT-LED
Resolution	1920 × 1080
Display Color	16.7M
Pixel Pitch(mm)	0.51075(H)×0.51075(V)
Brightness(nits)	350cd/m <sup>2</sup>
Contrast Ratio	3500:1
Viewing Angle	178(H) /178(V)
Response Time	5ms
Backlight	LED
Input & Output	
HDMI/VGA	2/1
USB	1(Could use image display by U disk connection)
BNC (Signal output)	1 (Video Output Default: TVI 5MP)
RJ 45(POE Powered Input)	0
Camera Signal selection	TVI: 5/4/2 MP AHD: 5/4/2 MP CVI: 4/2 MP
Camera	
DC Iris 2.8 Fixed lens	DC Iris 2.8 Fixed lens, SONY IMX335 SENSOR
Illumination	0.01Lux@(F1.2,AGC ON), 0LUX with IR Support IR-CUT switching, Support motion detection (1-60 second at setting)
Power & Mount Way	
Power	AC100V~240V
Working Temperature	-22°F ~ 185°F (-30°C ~ 85°C)
Consumption	<80W
Menu	English
Mounting/Weight	Stand mount, VESA mount/20kg
MTBF	50000Hours
Accessories	
Included Accessories	Industrial PSU, Screw, Cable holder, Quick start guide

UNIT:MM

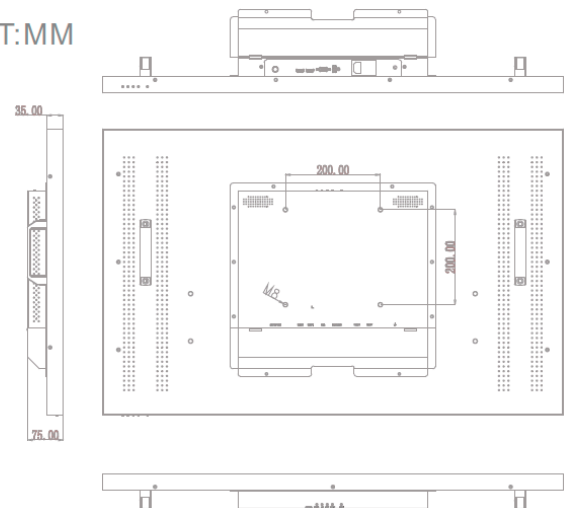

### Ordering Information

**IMHD-43PVMMULTI:** 43" PVM Monitor