


IMHD-7PVM

7" HD Analog PVM Monitor, (2) HDMI, VGA, RJ 45 PoE Input, BNC Output, 5 MP Built-in Camera, PoE+ powered monitor

Features

- 7" HD Screen
- Up to 5MP Resolution
- Built-in Camera with 2.8mm Lens
Supports TVI/AHD/CVI/CVBS
- Powered by DC12V or PoE+. A PoE+ switch or injector is required. Minimum of 30-watts required
- 250cd/m²
- (2) HDMI Input
- (1) VGA Input
- (1) BNC Output
- VESA Mount 75 x 75

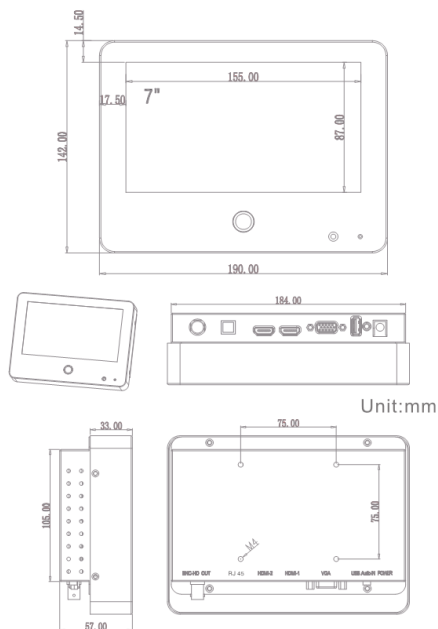

Display Characteristics	
Screen Size	7"
Active Display Area (W x H)	154.08 × 85.92 mm
Display Mode	16:9
LED Type	TFT-LED
Display Color	16.7M
Pixel Pitch (H x V)	0.1926 × 0.1790
Brightness(nits)	250cd/M ²
Contrast Ratio	500:1
Viewing Angle (H/V)	178 /178
Response Time	5ms
Backlight	LED
Input & Output	
HDMI	2
VGA	1
BNC (Signal output)	1
RJ 45 (POE Input)	1
Camera	
Lens	DC Iris 2.8 Fixed lens, SONY IMX335 Sensor
Video Output	TVI: 5/4/2 MP AHD: 5/4/2 MP CVI: 4/2 MP
Video Output Default	TVI @5MP
Illumination	Illumination, 0.01Lux@(F1.2,AGC ON), 0LUX with IR, Support IR-CUT switching
Power & Mount Way	
Power	DC12V ,50/60Hz or PoE+ Input, AT Standard
Working Temperature	-22°F ~ 185°F (-30°C ~ 85°C)
Power Consumption	<7.5W
Menu	Chinese/English (other languages supported)
Mounting	Stand mount, VESA mount 75 x 75
MTBF	50000Hours
Dimension size	7.5 x 5.6 x 1.3 in (190*142*33mm)
Net Weight	6.6 lbs (3kg)
Gross Weight	8.8 lbs (4kg)
Accessories	
Included Accessories	Wall mount, Industrial PSU, Screw, Cable holder, Quick start guide

Ordering Information

IMHD-7PVM: 7" PVM Monitor

InVid Tech, reserves the right to make changes to improve our products at any time without notice; we are not responsible for misprints.