

PAR-P2PVMCAM27


27" PVM Monitor with Built-in 2 Megapixel Camera, DC12-24V/PoE++

Features

- Built-in NDAA IPC PVM System
- 4 Screen Display Modes Settable via IPC Web Including Full Screen IP/Full Screen AD/Banner/Switch
- Advertisements Deploy via IPC Web
- Branding Logo Upload/Deploy by Web
- Deterrence Audio Upload/Deploy by Web
- Deterrence Message Upload and Pop-up When Events Triggered
- Built-in 1TB Max TF Card Slot for Local Recording/Snapshots
- Built to Run 24/7/365
- IK7 Tempered Glass Protection
- WiFi Capable

Model	PAR-P2PVMCAM27
Display	
Screen Size	27", 16:9 Aspect Ratio
Resolution	1920x1080
Brightness	250cd/m2
Contrast Ratio	3000:1
Viewing Angle	178/178
Display Color	16.7M
Response Time	<16ms
Deterrence Light	
LED Light	Support (White and Blue)
Built-In NDAA IP Camera	
Solution	2MP CMOS GC2093+RV1126 Chipset NDAA
Max Resolution	1920x1080
EMMC	8GB
DDR	1GB
Electronic Shutter	1/25s - 1/100000s
Min. Illumination	0.005LUX@F1.6,AGC ON

Lens	Fixed 3.3mm Lens(No Image Distortion)
Angle	H: 76-84, V:44-50 Degree
WDR	Yes
BLC	Yes
HLC	Yes
S/N Ratio	≥50dB
H.264&265	Yes
Integration Protocol	Onvif Profile S, API
Web Browser	IE, Chrome, Firefox, Safari
Main Stream	1920x1080, 1280x720
Sub Stream	640x360, 352x240
Bit Rate	36K~16M
Bit Rate Type	VBR/CBR
Network Protocol	TCP/IP, UDP, SMTP, DDNS, DHCP, FTP, RTSP,HTTPS,IPv6
Image Setting	Contrast,Hue,Brightness,Sharpness,WDR,BLC,HLC,Mirror,etc
AI Function	Face Detection
PIR Sensor	Yes
Recording	Motion/Video Blind/Face/PIR Detection
TF Card Slot	1TB Max for Local Recording/Snapshots
Branding Logo	PNG Picture On by Default. Can Disable or Change.
Deterrence Message	PNG Picture Based Pop-up When Event Triggered
Deterrence Audio	WAV
Speaker	Built-in 3Wx2
Wi-Fi	Support, 2.4GHz, Auto On
PIP/PBP	YES
Multimedia	Image: JPG/PNG/BMP/GIFVideo: MP4/MKV/MOV
Playing	Video Code: H.264/265, Video/Image Resolution: Not more than 1920x1080 Video Rate: Not more than 5120Kbps Audio Codec: aac/ac3/pcm
Display Modes	Full AD/Full IP Video/Banner/Switch(When Faces Detected)
Banner Mode Ratio	IP:1200x1080 AD:720x1080
Video Output	RJ 45x1 10M/100M
PVM Interfaces	DC Power Port, Motion Out, PIR Out,Face Out,Emergency Out, COM/NO/NC/GND,Alarm In, Alarm Out
General	
Dimension	25.4 x 17.2 x 2.1 in (645x437x64mm)
Weight	28.7lbs (13KG)
VESA Size	75x75mm (M4xL10 Screws)
Operation Temp.	32°F ~ 122°F (0° ~ 50°C)
Power	DC12-24V/5amps, PoE++ (<48W, IEEE802.3bt)

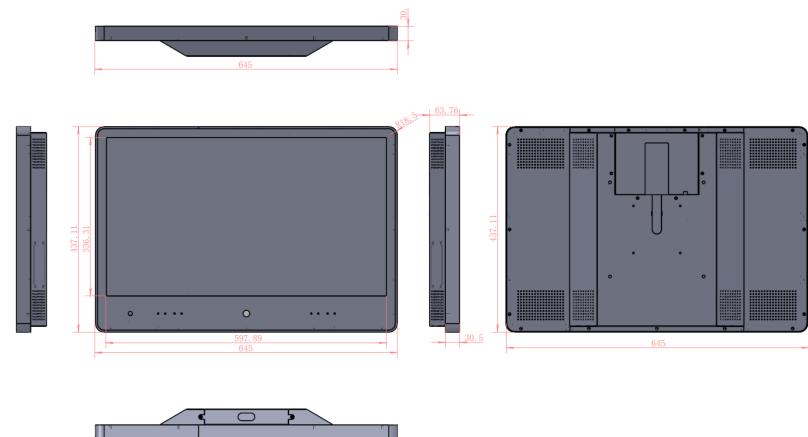

Ordering Information

PAR-P2PVMCAM27: 27" PVM Monitor

InVid Tech, reserves the right to make changes to improve our products at any time without notice; we are not responsible for misprints.