



PAR-P2ELEV29NH


2 Megapixel IP Plug & Play Metal Plate Elevator Camera, WDR, IR Range, DC12V/PoE

Features

- 2 Megapixel Resolution
- Fixed Lens
- Full Metal Front Panel
- True Day/Night with IR
- IR Range 82 Feet
- H.265/H.264/MJPEG Compression
- 30 FPS Recording and Live
- WDR
- Indoor Only
- 12VDC/PoE Operation
- ONVIF
- Free iOS & Android Apps for Smart Phones & Tablets
- Free Central Management Software (CMS) for PC/MAC
- NDAA Compliant
- TAA Compliant

Model	PAR-P2ELEV29NH
Image Sensor	1/2.8" Sony 2Mega STARVIS image sensor
Scan System	Progressive Scan
Total Pixels	1945(H) x 1109(V), 2.16 Mega Pixels
Effective Pixels	1945(H) x 1097(V), 2.13 Mega Pixels
Day & Night	Auto / Day(Color) / Night(BW), ICR Control
Privacy Area	On / Off (16 Programmable Zones)
Motion Detection	432 Zone, Sensitivity 1 ~ 5 Step, On / Off
Ext. Video	1.0Vp-p
Real WDR	120dB
DNR	2DNR, 3DNR
Video Compression	H.265/H.264/MJPEG
Resolution	1920x1080/1280x1024/1280x960/1280x720 1024x768/640x480/320x240
Max. Frame Rate	Max 30fps@ 1920x1080
Video Quality	H.265 : Bitrate Control H.264 : Bitrate Control MJPEG : Quality Level Control
Video Streaming	Triple Stream (RTP/RTSP , Unicast RTP , Multicast RTP)
LAN Interface	10/100-base-T Ethernet auto sensing PoE(IEEE 802.3af) Interface
Protocol	TCP/IP,UDP/IP,RTP,RTSP,RTCP,NTP, HTTP,DHCP,FTP,SMTP,DNS,DDNS
Onvif	ONVIF Ver17.06
Power Supply	PoE, DC12[V] ± 10%
Operating Temp	32°F ~ 122°F (0°C ~ +50°C)
Humidity	0% ~ 90%
Lens	2.8mm / F=1.6 Lens
Dimension (W x D x H)	7.4 x 5.5 x 1.6 in (190 x 140 x 42.3 mm)
Weight	Approx. .85lbs (390 g)

With LED

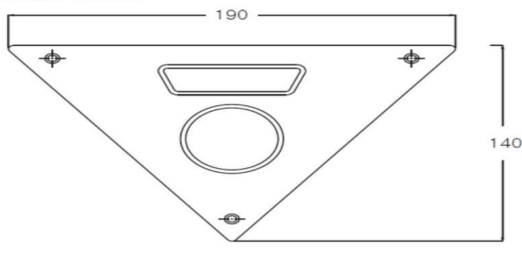

Ordering Information

PAR-P2ELEV29NH: 2 Megapixel IP Plug & Play Metal Plate Elevator Camera