InVid Tech
Innovative Video Technology



PAR-P4DRIRA27135NH-AI2

4 Megapixel IP Plug & Play, Outdoor Dome, Motorized 2.7-13.5mm, True AI, Supplemental Light Options: IR, White Light or IR to White Light on AI Trigger, Audio Input/Output, Built-in Mic, SD Card Slot, 12VDC/PoE

KEY FEATURES

- True AI Human & Vehicle Classification for Line Crossing, Intrusion Detection, & Other AI Features
- CVBS Video Output


CORE FEATURES

- 4 Megapixel
- Motorized Auto-Focus 2.7-13.5mm
- Cloud Upgradeable
- True P2P Connectivity with QR Code Connect NAT 2.0
- Micro SD Slot: Up to 512GB
- Built-in Mic with External Audio Input & Output
- True Day/Night with IR Range up to 164' or White Light Range up to 131'
- IP67 Weatherproof
- IK10 Vandal Resistant
- ONVIF
- Supports Native Chrome/Edge Use
- 12VDC/PoE Operation
- Free iOS & Android Apps for Smart Phones & Tablets
- Free Central Management Software (CMS) for PC/MAC
- NDAA Compliant

Model	PAR-P4DRIRA27135NH-AI2
Camera	
Image Sensor	1 / 2.7" CMOS
Max. Resolution	2688 × 1520
Electronic Shutter	1 / 3s ~ 1 / 100000 s
Iris Type	DC Iris
Min. Illumination	0.005 lux @F1.3, AGC ON; 0 lux with illumination on
S/N Ratio	≥50dB
Lens	2.7~13.5mm@F1.3
Field of View	Horizontal:101°~30°; Vertical: 54°~17°; Diagonal:121°~35°
Focus	Motorized
Lens Mount	Ø14
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defog	Yes
Digital NR	3D DNR
Angle Adjustment	Pan: -165°~180°; Tilt:0°~75°; Rotation: -165°~180°
Image	
Video Compression	Main/Fourth stream: H.265+/H.265/H.264+/H.264 Sub/Third stream: H.265+/H.265/H.264+/H.264/ MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Resolution	4MP (2688×1520), 2K (2560×1440), 1080P (1920×1080), 720P (1280×720), D1, VGA (640 ×480), 640 ×360, CIF, 480×240
Main Stream	4MP/2K/1080P (60Hz : 1 ~ 30fps; 50Hz: 1~25fps)
Sub Stream	1080P/720P/D1/VGA/640×360/CIF/480×240 (60Hz:1~30fps; 50Hz:1~25fps)
Third Stream	D1/VGA/640 ×360/CIF/480×240 (60Hz : 1 ~ 30fps; 50Hz: 1~25fps)
Fourth Stream	1080P/720P/D1/VGA/640×360 (60Hz:1~30fps; 50Hz:1~25fps)
Bit Rate	32 Kbps ~ 8 Mbps
Bit Rate Type	VBR / CBR
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Hue, Contrast,Wide Dynamic, Sharpness, Image Flip, Image Mirror, NR, etc. adjustable through client software or web browser
ROI	8 ROI, each ROI to be configured separately
Interfaces	
Network	RJ 45 (10/100 Base-T)
Video Output	CVBS (BNC×1)
Audio	1CH audio input; 1CH audio output; 1CH built-in microphone
Storage	Built-in micro SD card slot; up to 512G
Reset	Yes
Alarm	1CH alarm input; 1CH alarm output
Intelligent Analytics	
Intelligent Video Detection (IVD)	Line crossing/ region intrusion/entrance/exiting (human/vehicle classification), loitering detection, illegal parking detection, abandoned/missing object detection, people gathering detection
Statistics	Target counting by line/area, heat map
Exception Detection	Scene change, video blur and abnormal color detection, audio exception
Face Detection	Face detection and face capture
Video Metadata	Simultaneously captures human body, motor vehicle and non-motor vehicle and extracts 13 human features, 4 motor vehicle features and 1 non-motor vehicle feature
DORI Distance	

Lens	Detect(ft)	Observe(ft)	Recognize(ft)	Identify(ft)
2.7~13.5mm (W)	196 (60m)	78 (24m)	39 (12m)	20 (6m)
2.7~13.5mm (T)	667 (203m)	267 (81m)	133 (41m)	67 (20m)

Functions	
Remote Monitoring	Web Client/NVR/Paramount CMS 2.0/ Paramount CMS Mobile APP
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, RTMP, FTP, PPPoE, DDNS, SMTP, SNMP, HTTP, 802.1x, UPnP, HTTPS, NAT, QoS, ICMP, IGMP
Interface Protocol	ONVIF Profile S/G/M/T
API&SDK	Yes
Storage	Network remote storage; micro SD card storage
Smart Alarm	Motion detection, SMD, sensor alarm, SD card error, SD card full, IP address conflict, cable disconnection, audio alarm
General Function	Watermark, video mask, heartbeat, image distortion correction, smart IR, smart supplement light, corridor pattern, ANR, cloud upgrade, disarming
Security	Firmware encryption, HTTPS encryption, configuration encryption, video encryption, illegal login lock, IP address filtering, 802.1x, log out after timeout basic and digest authentication for HTTP/RTSP/API service, TLS1.1/1.2/1.3
PoE	Yes , IEEE802.3af, class3
Supplement Light Range	IR range: 164'/White light range: 131'
Ingress Protection	IP 67 & IK10
Others	
Power Supply	DC12V/PoE
Power Consumption	DC12V: < 9.4W; PoE: < 10.6W
Storage Conditions	-22°F~149°F (- 30 °C ~ 65°C), Humidity: less than 95 % (non-condensing)
Operating Conditions	-22°F~140°F (- 30 °C ~ 60 °C), Humidity: less than 95 % (non-condensing)
Dimensions	Ø 5.6 x 3.9in (141 × 100mm)
Weight (net)	Approx. 2lbs (0.889KG)
Material	Aluminum alloy body
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Directive EU RoHS, WEEE(2012/19/EU), and REACH(EC1907/2006)

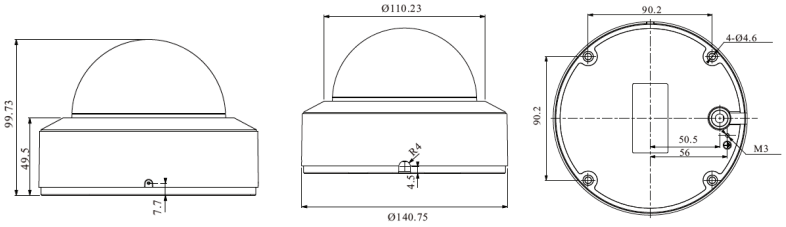

Ordering Information

PAR-P4DRIRA27135NH-AI2: 4 Megapixel Dome, 2.7-13.5mm Lens

InVid Tech, reserves the right to make changes to improve our products at any time without notice; we are not responsible for misprints.

Innovative Video Technology 5 Adams Avenue, Hauppauge, NY 11788 | 631-388-5700 | sales@invidtech.com | www.invidtech.com

PARAMONT