




PAR-P5BXIR17-LC

5 Megapixel IP Plug & Play, Outdoor Bullet, Wide Angle 1.7mm Fixed Lens, WDR, 12VDC/PoE

Features

- 5 Megapixel Resolution
- Wide Angle 1.7mm Fixed Lens
- True Day/Night
- H.265/H.264/MJPEG
- 30 FPS Recording and Live
- WDR
- IP66 Weather Resistant
- 12VDC/PoE Operation
- ONVIF
- Free iOS & Android Apps for Smart Phones & Tablets
- Free Central Management Software (CMS)
- Free MAC Client

Model Specifications	PAR-P5BXIR17-LC
Image Sensor	1/2.8" Sony 5.69MP STARVIS image sensor
Scan System	Progressive Scan
Total Pixels	2704(H) x 2104(V), 5.69 Mega Pixels
Effective Pixels	2616(H) x 1964(V), 5.14 Mega Pixels
Day & Night	Auto / Day(Color) / Night(BW), ICR Control
Privacy Area	On / Off (16 Programmable Zones)
Motion Detection	432 Zone, Sensitivity 1 ~ 5 Step, On / Off
Real WDR	120dB
DNR	2DNR, 3DNR
Video Compression	H.265/H.264/MJPEG
Resolution	2560x1920 / 2560x1440 / 2048x1536 / 1600x1200 / 1920x1080/1280x1024 / 1280x960/640x480/640x36/320x240/320x180
Max. Frame Rate	Max 30fps@ all resolution
Video Quality	H.265 : Bitrate Control H.264 : Bitrate Control MJPEG : Quality Level Control
Video Streaming	Triple Stream (RTP/RTSP , Unicast RTP , Multicast RTP)
LAN Interface	RJ45 10/100-base-T Ethernet auto sensing PoE(IEEE 802.3af) Interface
Protocol	TCP/IP,UDP/IP,RTP,RTSP,RTCP,NTP, HTTP,DHCP,FTP, SMTP,DNS,DDNS
ONVIF	ONVIF Ver17.06
Power Supply	PoE, DC12[V] ± 10%
Operating Temp	32°F ~ 122°F (0°C ~ 50°C)
Humidity	0% ~ 90%
Lens	1.7mm fixed lens (ICR) 170 degrees
Dimension	Ø 2.2 x 2.7 x 4.1 in (Ø57 x 68 x 104mm)
Weight	Approx. .88 lb (400g)

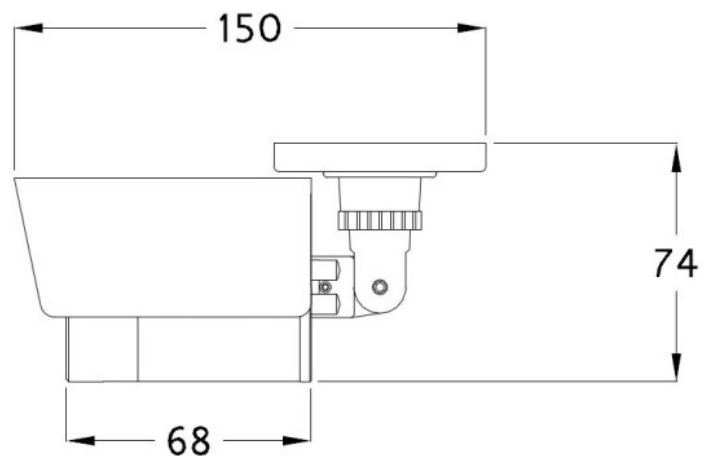

Ordering Information

PAR-P5BXIR17-LC: 5 Megapixel Bullet, 1.7mm