



## PAR-C5DRIRA28


5 Megapixel, TVI/AHD/CVI/Analog 960h, Outdoor Dome, Fixed Lens, D-WDR, IR Range up to 65', 12VDC, Audio Over Coax (AOC)

### Features


- 5 Megapixel Resolution
- Built-in Mic: Audio Over Coax\*\*
- All-in-One Technology (TVI/AHD/CVI/Analog 960h)
- Fixed Lens
- True Day/Night with IR Range up to 65'
- Up The Cable (UTC) Function
- IP67 Weatherproof
- IK10 Vandal Resistant
- D-WDR
- 12VDC Operation
- Through InVid Tech DVR: Free App, CMS & MAC Client
- NDAA Compliant

\*\* With use of Paramount (Version 1.3.8 and above)/ Vision DVRs. TVI Only.

|                      |  |
|----------------------|--|
| Camera               | PAR-C5DRIRA28  |
| Image Sensor         | 1 / 2.5" CMOS  |
| Resolution           | 5MP/4MP  |
| Image Size           | Max. 2944 × 1656 (16:9)  |
| Video Output         | AHD / TVI / CVI / CVBS   |
| Default Video Output | TVI  |
| Image System         | PAL / NTSC   |
| Electronic Shutter   | Auto; 1/50s~1/100000s (PAL); 1/60s~1/100000(NTSC)  |
| IR Distance          | 65'  |
| Frame Rate           | TVI: 2944×1656@20fps, 2560×1440@25fps/30fps AHD: 2944×1656@20fps, 2560×1440@25fps/30fps CVI:2560×1440@25fps/30fps CVBS: PAL/NTSC |
| Min. Illumination    | Color: 0.01lux@F1.2, AGC ON; B/W: 0 lux with IR  |
| Lens                 | 2.8 mm   |
| Lens Mount           | M12  |
| S / N Ratio          | ≥52dB ( AGC OFF )  |
| Ingress Protection   | IP 67 & IK10   |
| Audio                |  |
| Audio                | Built-in Mic, Audio Over Coax (AoC)  |
| Camera Audio         | TVI Support  |
| Audio Sensitivity    | -36db  |
| Functions            |  |
| Function Control     | OSD ( UTC Control )  |
| Day & Night          | ICR  |
| Digital WDR          | Yes  |
| Digital NR           | Yes, 2D DNR  |
| AGC                  | Yes  |
| Auto White Balance   | Yes  |
| BLC                  | Yes  |
| HLC                  | Yes  |
| Sharpness            | Yes  |
| Smart LED            | Yes  |
| Image Setting        | Yes  |
| Defect Correction    | Auto   |
| Language             | Chinese and English  |
| Angle Adjustment     | Pan: 0°~355°; Tilt: 0°~67°; Rotation: 0°~355°  |
| Others               |  |
| Power Supply         | DC12V ( ± 15% )  |
| Power Consumption    | IR OFF : < 1W; IR ON : < 4W  |
| Working Environment  | -22°F ~ 122°F ( - 30 °C ~ 50 °C ), 10 % ~ 90 % (relative humidity)   |
| Dimensions           | 4.7 x 3.5 in (119 x 87.8mm)  |
| Weight ( net )       | Approx. 1.3 lbs (0.6KG)  |

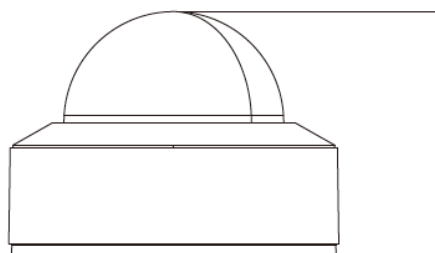

87.80mm



119.00mm

### Ordering Information

**PAR-C5DRIRA28:** 5 Megapixel Dome, 2.8mm