





PAR-C5DRIRA2812N

5 Megapixel TVI/AHD/CVI/CVBS, Outdoor Dome, Motorized A/F, IR Range up to 98', 12VDC

Features

- 5 Megapixel Resolution
- All-in-One Technology (TVI/AHD/CVI/Analog 960h)
- Motorized Auto-Focus 2.8-12mm Lens
- True Day/Night with IR Range up to 98'
- D-WDR
- Up The Cable (UTC) Function
- IP67 Weatherproof
- IK10 Vandal Resistant
- 12VDC Operation
- Through InVid Tech DVR: Free App, CMS & MAC Client

Camera	PAR-C5DRIRA2812N
Image Sensor	1 / 2.5" CMOS
Resolution	5MP/4MP
Image Size	Max. 2944 × 1656 (16:9)
Video Output	AHD / TVI / CVI / CVBS
Audio	No
Image System	PAL / NTSC
Electronic Shutter	Auto; 1/50s~1/100000s (PAL); 1/60s~1/100000(NTSC)
IR Distance	98'
Frame Rate	TVI: 2944×1656@20fps, 2560×1440@25fps/30fps AHD: 2944×1656@20fps, 2560×1440@25fps/30fps CVI:2560×1440@25fps/30fps CVBS: PAL/NTSC
Min. Illumination	Color: 0.01lux@F1.2, AGC ON; B/W: 0 lux with IR
Lens	2.8~12 mm
Lens Mount	M12
S / N Ratio	≥52dB (AGC OFF)
Ingress Protection	IP 67 & IK10
Functions	
Function Control	OSD (UTC Control)
Day & Night	ICR
Digital WDR	Yes
Digital NR	Yes, 2D DNR
AGC	Yes
Auto White Balance	Yes
BLC	Yes
HLC	Yes
Sharpness	Yes
Smart LED	Yes
Image Setting	Yes
Defect Correction	Auto
Language	Chinese and English
Angle Adjustment	Pan: 0°~345°; Tilt: 0°~77°; Rotation: 0°~345°
Others	
Power Supply	DC12V (± 15%)
Power Consumption	IR OFF : < 1W; IR ON : < 6W
Working Environment	-22°F ~ 122°F (-30 °C ~ 50 °C), 10 % ~ 90 % (relative humidity)
Dimensions	5.6 x 3.9 in. (141 x 100.2mm)
Weight	Approx. 1.9 lbs (0.84KG)

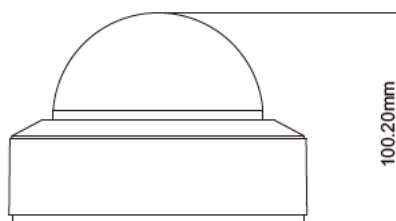

Ordering Information

PAR-C5DRIRA2812N: 5 Megapixel Dome, 2.8-12mm