



PAR-ALL5TXIR18



5-2 Megapixel Field Selectable TVI/AHD/CVI/CVBS, Outdoor Turret, Super Wide Angle 1.8mm Lens, Up to 65' IR Range, True WDR, 12VDC

Features

- 5-2 Megapixel Field Selectable**, Sony Sensor and Fuhan 4K DSP
- Super Wide Angle 1.8mm Lens
- All-in-One Technology (TVI/AHD/CVI/Analog 960h)
- True WDR
- Up to 65' IR Range
- Built-in OSD Board, Built-in Dip Switch, Built-in Optional Video Output
- Up The Cable (UTC) Function
- IP66 Weather Resistant
- 12VDC Operation
- Through InVid Tech DVR:Free App, CMS & MAC Client
- NDAA Compliant

**Scale down to other resolutions via camera dip switches or OSD

Camera	
Filter	Removable IR Cut Filter
Image Sensor	1/2.8" 5M Progressive Scan Sony CMOS
Pixels	2688(H)×1944(V)
Horizontal Resolution	5MP
LED Light	18PCs SMD IR LEDs
Vertical Frequency	NTSC:60Hz PAL:50Hz
Scanning System	Progressive
S/N Ratio	≥54dB
Lens	1.8mm (FOV-H: 140°±5%)
White Balance	ATW
AUTO Gain Control	ON
OSD	YES
3DNR	OFF/ON
True WDR	120Db (default OFF)
Day&Night	AUTO/Color/BW/Ext
IR Range	49.2 ~ 65.6 ft (15 ~ 20m)
Video Output	TVI: 5MP 20/12.5 FPS, 4MP/2MP 30/25 FPS AHD:5MP 20/12.5 FPS, 4 MP / 2MP 30/25 FPS CVI:4MP 30/25 FPS, 2 MP 30/25 FPS CVBS
Video Output By Default	TVI: 5MP @ 20 FPS
General	
Power Supply	DC12V±10%
Current consumption	DC12V: 450mA (MAX)
IP Rating	IP66
Dimension	Φ3.7" × 3" (93×75mm)
Weight	.73 lb (330g)
Storage Temperature	-22°F ~140°F (30°C ~ 60°C)
Operating Temperature	-22°F ~104°F (30°C ~ 40°C)

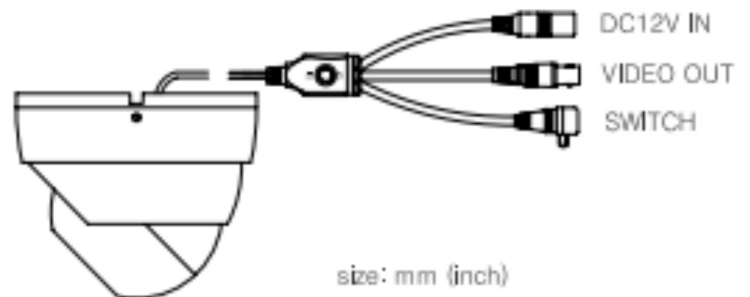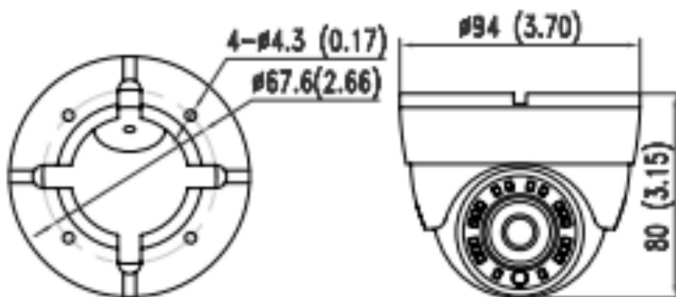

Ordering Information

PAR-ALL5TXIR18: 5-2 Megapixel Outdoor Turret, 1.8mm