




PAR-ALLDRXIR28BD

5 Megapixel TVI/AHD/CVI/Analog Outdoor Dome with Internal Built-in Balun & BNC, 65' IR Range, D-WDR, Dual Voltage

Features

- 5 Megapixel Resolution (TVI/AHD)
4 Megapixel Resolution (CVI)
- All-in-One Technology (TVI/AHD/CVI/Analog 960h)
- Fixed Lens
- True Day/Night
- D-WDR
- 65' Smart IR Range
- Up The Cable (UTC) Function
- IK10 Vandal Resistant
- IP67 Weather Resistant
- Internal Built-in Balun and BNC, without Camera Leads
- Built-in 12vDC Output, 100mA Max
- Dual Voltage
- Through InVid Tech DVR: Free App, CMS & MAC Client

| | |
|-------------------------|--|
| Camera | PAR-ALLDRXIR28BD |
| Filter | Removable IR Cut Filter |
| Image Sensor | 1/2.8" 5M Progressive Scan CMOS |
| Pixels | 2688(H)×1944(V) |
| Horizontal Resolution | 5MP |
| Minimum Lux | 0 Lux (when 3pcs high power LED on) |
| Vertical Frequency | NTSC:60Hz PAL:50Hz |
| Scanning System | Progressive |
| S/N Ratio | ≥50dB |
| Electronic Shutter | NTSC:1/60-1/60,000S PAL:1/50-1/50,000S |
| Lens | 2.8mm IR Lens |
| White Balance | ATW |
| AUTO Gain Control | ON |
| DNR | OFF/ON |
| Day&Night | AUTO/Color/BW/Ext |
| Available IR Distance | 65.6 ft |
| Video Output | TVI/AHD: 5MP 20 fps, 4MP @30 fps CVI: 4MP @30 fps CVBS |
| Video Output By Default | TVI |
| IP Rating | IP67 94.5-5.5 mm external wiring) |
| Housing | IK10 |
| Power Supply | DC12V&AC24V |
| Current consumption | DC12V:400mA(MAX)/ AC24V:180mA(MAX) |
| Weight | 1000g (35.28oz) |
| Dimension | 4.49×3.22" (114×81.8mm) |
| Storage Temperature | -22°F ~ 140°F (-30°+60°C) |
| Operating Temperature | -22°F ~ 104°F (-30°+40°C) |

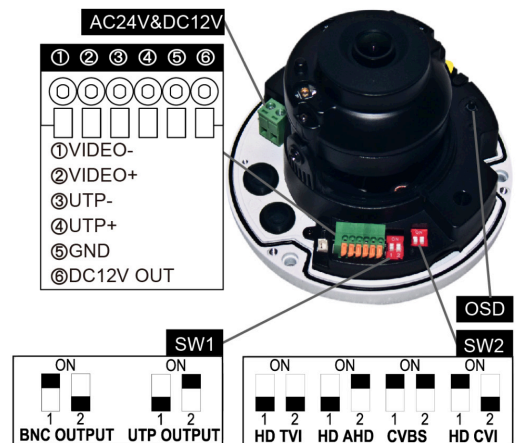

Ordering Information

PAR-ALLDRXIR28BD: 5 Megapixel Dome, 2.8mm