



SEC-P5BXIR28NH-AIWL


5 Megapixel IP Plug & Play, Outdoor Bullet, Fixed Lens, up to 65' IR Range, White Light Range up to 49', D-WDR, SD Card Slot, PoE/12VDC

Features

- Smart Analytics: AI Human Body Detection
- White Light OR Deterrent: Human Body Triggered
- 24/7 Color at Night with White Light OR IR/White Light Trigger
- True Plug & Play With Ultra & Paramont*
- Partial Plug & Play with Vision**
- 5 Megapixel Resolution
- Fixed Lens
- True Day/Night with IR Range up to 65'
- White Light Range up to 49'
- Micro SD Slot: Up to 256GB
- IP66 Weather Resistant
- 12VDC/PoE Operation
- ONVIF
- Free iOS & Android Apps for Smart Phones & Tablets
- Free Central Management Software (CMS)
- Free MAC Client
- NDAA Compliant

*Latest firmware required for Paramont Series

**Once the camera is connected into the back of the NVR it will detect and assign an IP address but not auto connect. Simply go to the camera menu in the NVR and change from Plug N Play to Manual and put in the cameras password & it will connect. No IP Utility or laptops needed!

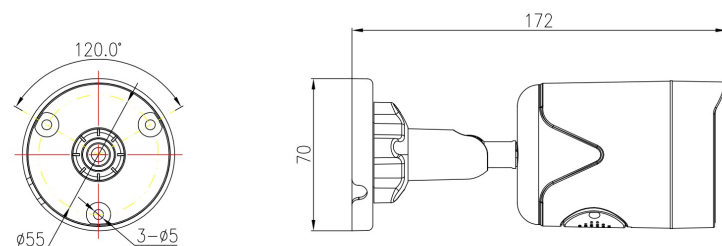

Ordering Information

SEC-P5BXIR28NH-AIWL: 5 Megapixel Bullet, 2.8mm

Camera	
Image Sensor	1/3" Progressive Scan CMOS
Max. Resolution	2560(H)×1920(V)
Electronic Shutter	Auto/Manual, 1/5 ~ 1/20,000s
Min. illumination	Color: 0.1 Lux @ (F1.2,AGC ON) , B/W: 0 Lux @ (IR LED ON)
S/N Ratio	55 dB
Day/Night	Auto(ICR)/Day / Night
Wide Dynamic Range	DWDR
LED Range	Up to 66.61 ft (20 m)
IR On/Off Control	Auto/Manual
Lens	
Lens Type	Fixed focal
Iris	Fixed Iris
Focal Length	2.8 mm
F Number	F1.6
Angle of View	H: 93.14°, V: 50.43°
Video	
Streaming Capability	2 Streams
Stream/Frame Rate	Main Stream: 2560×1920, 2560×1440, 2304×1520, 1920×1080, 1280×720 @ 20fps Sub Stream: 640×360 @ 20fps
Bit Rate Control	CBR/VBR
Bit Rate	Main Stream: 128kbps ~ 4096kbps Sub Stream: 16kbps ~ 1536kbps
Image Adjustment	Brightness/Sharpness/Contrast/Saturation
White Balance	Auto/Manual
Mirror	Support
Noise Reduction	2D/3D DNR
Image Enhancement	WDR/HLC/BLC/Defog
Motion Detection	Support
Privacy Masking	Support
Smart Function	
Human Detection	Support
Smart Event	Line Crossing, Intrusion Detection
Network	
Protocols	IPv4, RTSP/RTP/RTCP, TCP/UDP, HTTPS, DHCP, DNS, DDNS, UPNP, ICMP, IGMP, NTP, SMTP, 802.1x, SNMP
Interoperability	ONVIF, SDK
Max. User Access	4 Users
Web Viewer	<IE11, Chrome, Firefox, Microsoft Edge
Management Software	InVid View
Interface	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Storage	Built-in Micro SD slot, up to 256GB
Reset Button	Support
Electrical	
Power Supply	DC12V/POE (IEEE 802.3af)
Power Consumption	Max 8W
Operating Temperature	-31°F ~ 131°F (-35°C ~ 55°C)
Operating Humidity	Less than 90% RH
Ingress Protection	IP66
Certifications	CE/FCC
Casing	Metal
Dimensions	φ 2.8 x 6.8 in (φ70 x 172mm)
Net Weight	.77 lb (0.35kg)