


InVidTech

Innovative Video Technology




HARDWARE


FRONT VIEW

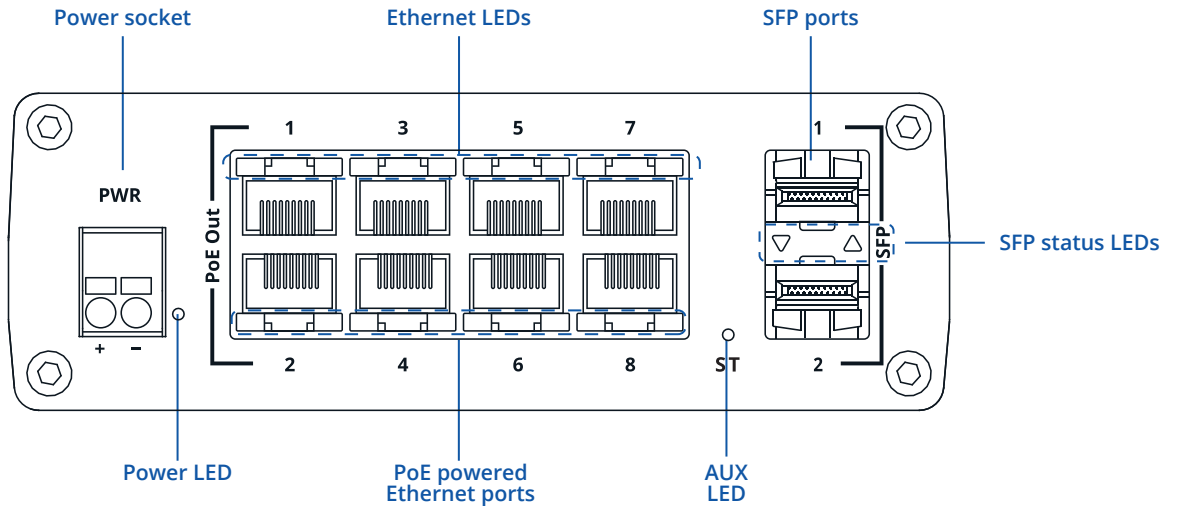


BACK VIEW

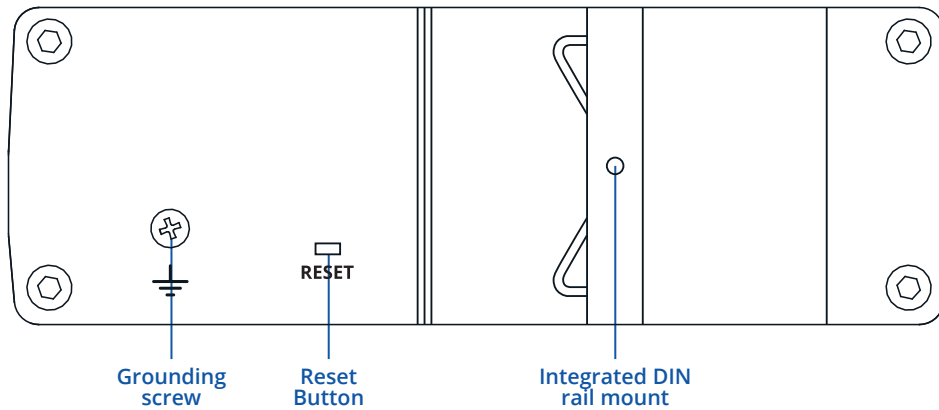


RJ45 LED MEANING



POWER SOCKET PINOUT

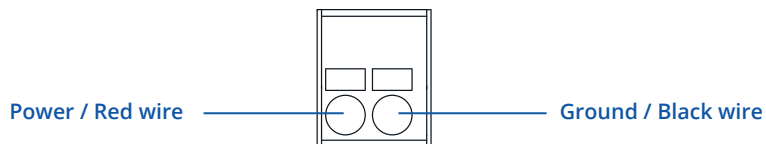

SFP LED MEANING

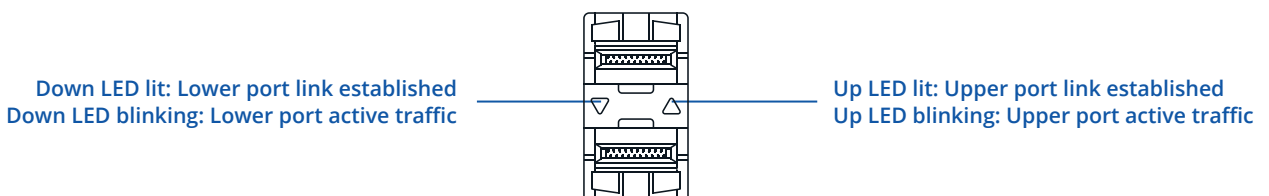

FEATURES

ETHERNET

| | |
|-----------------------------|--|
| ETH | Multi-layer managed 8 x ETH ports, 10/100/1000 Mbps supports auto MDI/MDIX crossover |
| Fibre | 2 x SFP ports |
| IEEE 802.3 series standards | 802.3i, 802.3u, 802.3ab, 802.3x |

POE OUT

| | |
|---------------------------------|-----------------------------------|
| PoE ports | Port 1 - 8 |
| PoE standards | 802.3af and 802.3at Alternative B |
| PoE Max Power per Port (at PSE) | 30 W |
| Total PoE Power Budget (at PSE) | 240 W |
| Maximum Ethernet cable length | 100 m |

SERVICES

| | |
|--------------------|-----|
| EtherNet/IP | Yes |
| Profinet (class B) | Yes |
| SNMP V2, V3 | Yes |
| LLDP | Yes |

NETWORK

| | |
|---------------|--|
| MRP | MRP client role, MRP manager role |
| L2 features | Loop protection, Forwarding table, VLAN, STP/RSTP |
| DHCP | DHCP server, DHCP client |
| Port Settings | Enable/disable, link speed control, port isolation, PoE Management, EEE (802.3az) management, Port Mirroring |
| L3 Features | Static IPv4 routing, static IPv6 routing, DHCPv6 client, static IPv6 address |

QOS

| | |
|-------------------|--|
| QOS | Port priority, DSCP priority, 802.1p priority, TOS |
| Scheduling method | SP/WFQ/WRR |
| Bandwidth control | Rate limiting, storm control |
| Traffic Shaper | Port-based shaping |

DIAGNOSTICS

| | |
|-------|--|
| Tools | Cable diagnostic, ping, traceroute, nslookup |
|-------|--|

SYSTEM CHARACTERISTICS

| | |
|---------------|--------------------|
| RAM | 128MB, DDR3 |
| FLASH storage | 16 MB serial flash |

FIRMWARE / CONFIGURATION

| | |
|---------------|---|
| WEB UI | Update FW from file, check FW on server, configuration profiles, configuration backup |
| FOTA | Update FW |
| RMS | Update FW, configuration for multiple devices at once |
| Keep settings | Update FW without losing current configuration |

FIRMWARE CUSTOMISATION

| | |
|---------------------|---|
| Operating system | TSWOS (OpenWrt based Linux OS) |
| Supported languages | Busybox shell, Lua, C, C++ |
| Development tools | SDK package with build environment provided |

PERFORMANCE SPECIFICATIONS

| | |
|--------------------------|-------------|
| Bandwidth (Non-blocking) | 20 Gbps |
| Forwarding rate | 14.88 Mpps |
| Packet buffer | 512 KB |
| MAC address table size | 8K entries |
| Jumbo frame support | 10000 bytes |

POWER

| | |
|-----------------------------|---|
| Connector | 2-pin industrial DC power socket |
| Input voltage range | 7 - 57 VDC |
| Input voltage range for PoE | 44 - 57 VDC |
| Power consumption | Idle: < 3 W / Max: 8 W / PoE Max: 248 W |

PHYSICAL INTERFACES

| | |
|-------------|---|
| Ethernet | 8 x RJ45 ports, 10/100/1000 Mbps |
| Fibre | 2 x SFP ports |
| Status LEDs | 1 x Power LED, 1 x Aux LED, 16 x LAN status LEDs, 2 x SFP status LEDs |
| Power | 1 x 2-pin industrial DC power socket |
| Reset | Software reset button |
| Grounding | Screw terminal |

PHYSICAL SPECIFICATION

| | |
|------------------------|--|
| Casing material | Anodized aluminum housing and panels |
| Dimensions (W x H x D) | 5.2 x 1.7 x 4.8 in (132 x 44.2 x 122.2 mm) |
| Weight | 1.3 lbs (610 g) |
| Mounting options | Integrated DIN rail bracket, wall mounting (additional kit needed), flat surface placement |

OPERATING ENVIRONMENT

| | |
|---------------------------|----------------------------------|
| Operating temperature | -40°F to 167°F (-40 °C to 75 °C) |
| Operating humidity | 10 % to 90 % non-condensing |
| Ingress Protection Rating | IP30 |

REGULATORY & TYPE APPROVALS

| | |
|------------|---|
| Regulatory | CE, UKCA, RCM, ANRT, FCC, IC, CB, RoHS, REACH |
|------------|---|

EMC EMISSIONS & IMMUNITY

| | |
|---|--|
| Standards | EN 55032:2015 + A11:2020 + A1:2020 EN 55035:2017 + A11:2020 EN IEC 61000-3-2: 2019 + A1:2021 EN 61000-3-3: 2013 + A1:2019 + A2:2021 |
| ESD | EN 61000-4-2:2009 |
| Radiated Immunity | EN IEC 61000-4-3:2020 |
| EFT | EN 61000-4-4:2012 |
| Surge Immunity (AC Mains Power Port) | EN 61000-4-5:2014 + A1:2017 |
| CS | EN 61000-4-6:2014 |
| DIP | EN 61000-4-11:2020 |

SAFETY

| | |
|-----------|--|
| Standards | CE: EN IEC 62368-1:2020 + A11:2020 RCM: AS/NZS 62368.1:2022 CB: IEC 62368-1:2018 |
|-----------|--|

SECA-GIGPOE8-2MAN SPATIAL MEASUREMENTS

MAIN MEASUREMENTS

W x H x D dimensions for SECA-GIGPOE8-2MAN:


Device housing*: 5.2 x 1.7 x 4.8 in (132 x 44.2 x 122.2 mm)

Box: 4.9 x 5.4 x 1.9 in (125 x 136 x 47 mm)

*Housing measurements are presented without screws; for measurements of other device elements look to the sections below.


TOP VIEW

The figure below depicts the measurements of SECA-GIGPOE8-2MAN and its components as seen from the top:

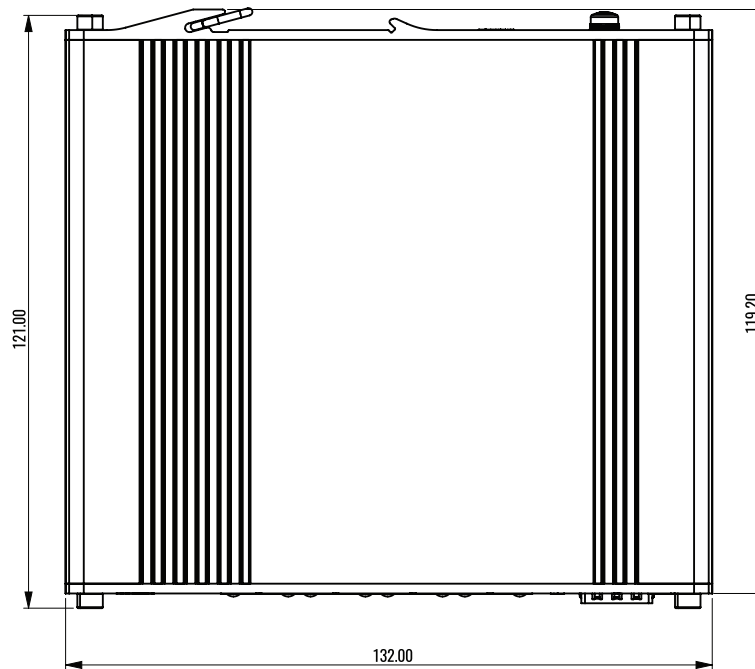


RIGHT VIEW

The figure below depicts the measurements of SECA-GIGPOE8-2MAN and its components as seen from the right side:

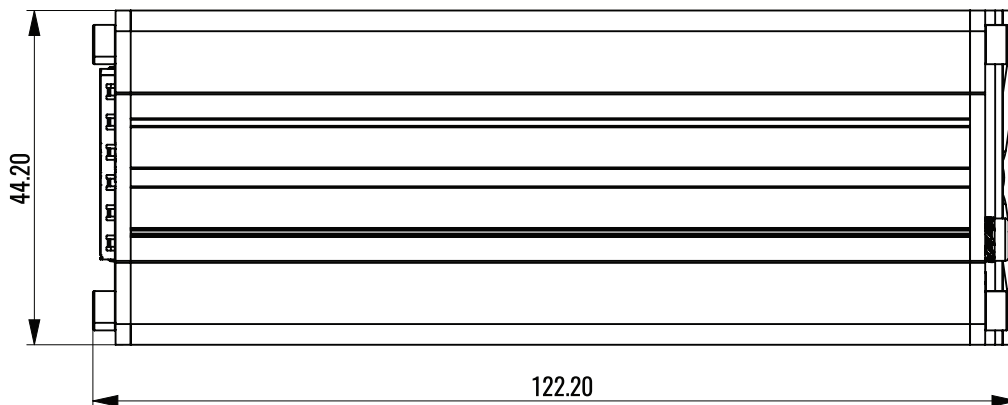


FRONT VIEW

The figure below depicts the measurements of SECA-GIGPOE8-2MAN and its components as seen from the front panel side:

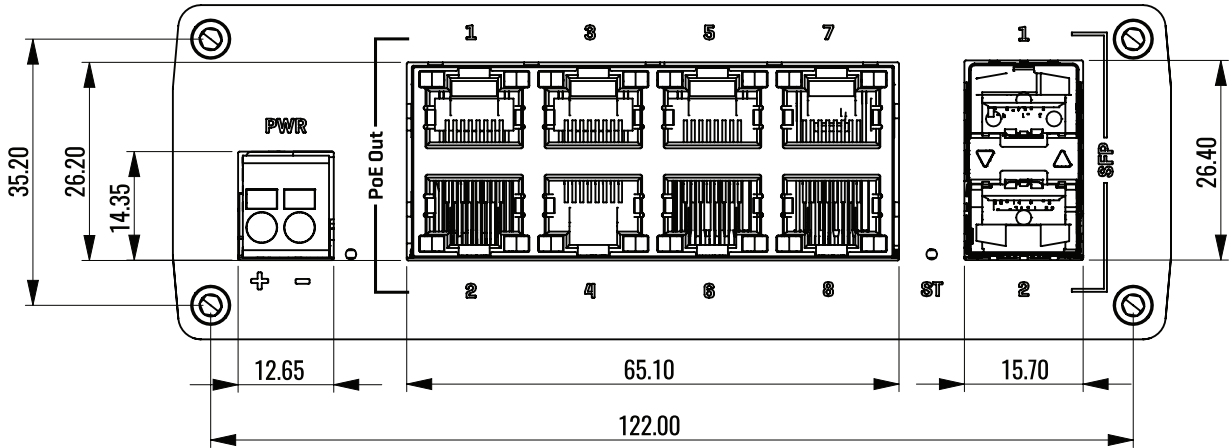

REAR VIEW

The figure below depicts the measurements of SECA-GIGPOE8-2MAN and its components as seen from the back panel side:

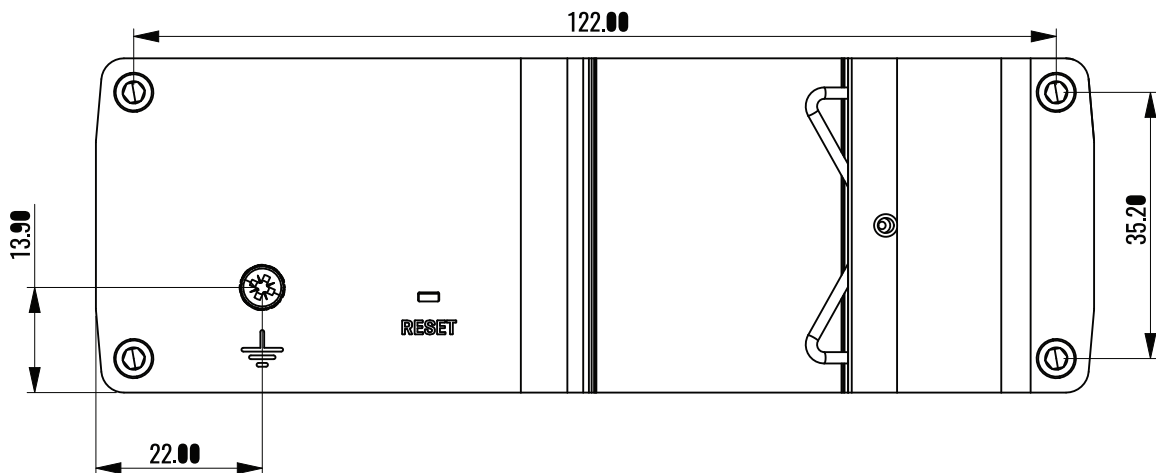

MOUNTING SPACE REQUIREMENTS

The figure below depicts an approximation of the device's dimensions when cables are attached:

