


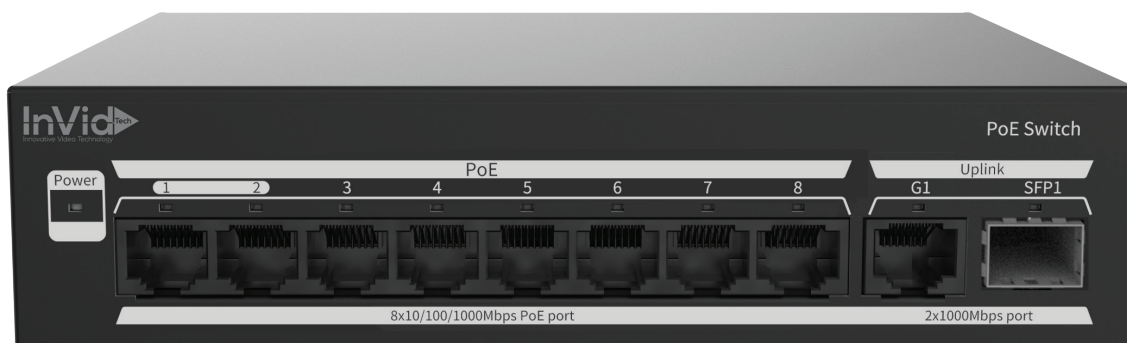

VIS-GIGPOE8-1A


8+ 1 xRJ45 Full Gigabit, Max PoE 120w, With 2 Uplink Ports (1 RJ/1SFP)

Features

- Complies with IEEE802.3, IEEE802.3u, IEEE802.3az, IEEE802.3x, IEEE802.3af, IEEE802.3at
- 8-Port 10/100/1000Mbps
- 1-Port 10/100/1000Mbps RJ45 interface for uplink
- 1-Port 10/100/1000Mbps SFP interface for uplink
- Up to 8 IEEE 802.3af devices powered
- Up to 4 IEEE 802.3at devices powered
- Max Single Port up to 30 watts
- Auto detects powered device (PD)
- Circuit protection prevents power interference between ports
- Desktop size

This switch supports Mode A standard PoE power using pins 1/2 and 3/6 to power the INVID-P2P-2.4-1.5X2.

Model	VIS-GIGPOE8-1A
Hardware Specification	
Ports Type	8x 10/100/1000Mbps PoE port (RJ45) 1 x 10/100/1000Mbps port (RJ45) 1 x Gigabit SFP
Switching capacity	20Gbps
Forwarding performance	14.88Mpps
Packet Buffer	4 M bit
MAC	8K
Priority Ports	1 to 2
Dimensions (W×D×H)	6.7 x 5.2 x 1.6 in (169*132*40mm)
Power Supply	AC: 100V to 240V, 50/60Hz
PoE Standard	IEEE 802.3af, IEEE 802.3 at
PoE Mode	ModeA (1236), ModeB (4578)
Max.PoE Power	Max capacity: 120W Maximum PoE power for single port: 30W
Max.Power	125W
Cooling Fans	0
Weight	1.9 lbs (0.85KG)
Operating Temperature	32°F ~ 113°F (0°C ~ 45°C)
Operating Humidity	10% to 90% (noncondensing)
Indicator	Power: Off: Abnormal power input. Green: Normal power input. Yellow: The total PoE power is higher than 85% of the total power of the device. Link/Act: Off: Disconnected to the port On: Connected to the port. Blinking: Transmitting data.
Compliance	
NDAA Compliant	Support

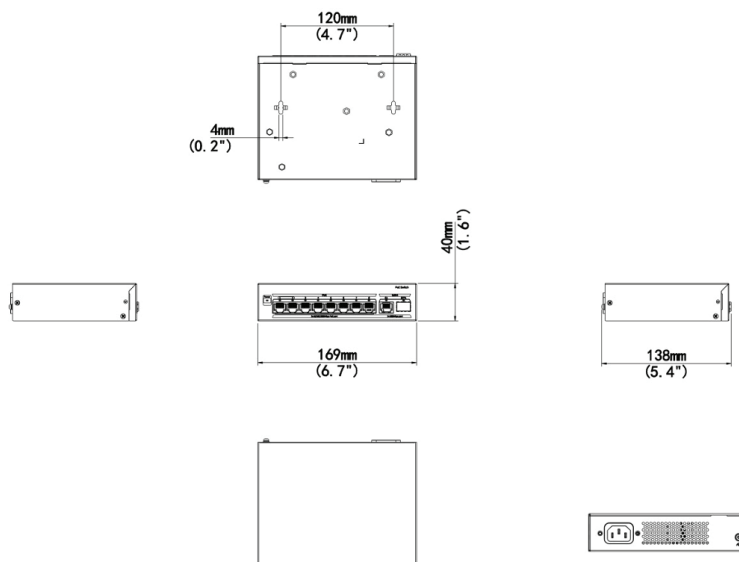

Ordering Information

VIS-GIGPOE8-1A: Gigabit Switch