






## VIS-HDMI7A

7 Channel H.265 Decoding Card

### Features

- Support 7-ch HDMI
- HDMI at up to 4K(3840x2160) resolution
- All HDMI independent outputs provided
- Support H.265/H.264 video formats
- Up to 16 Megapixels resolution recording
- NDAA Compliant

Spec	VIS-HDMI7A
Video/Audio Output	
HDMI Output	HDMI1 & HDMI2 & HDMI3 & HDMI4: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080 /60Hz, 1920x1080 /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz  HDMI5 & HDMI6 & HDMI7: 1920x1080 /60Hz, 1920x1080 /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz
Decoding	
Decoding Capability	HDMI1 & HDMI3 & HDMI5 & HDMI7: 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30, 54 x 960P@30, 72x 720P@30, 128 x D1 HDMI2 & HDMI4 & HDMI6: 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30, 54 x 960P@30, 72x 720P@30, 128 x D1
Multi-window	1/4/5/6/7/8/9/16
Working Environment	
Working Temperature	14°F ~ 131°F (-10°C ~ + 55°C)
Working Humidity	10% ~ 90% (non-condensing)
Weight	< 2.2 lb (1 Kg)

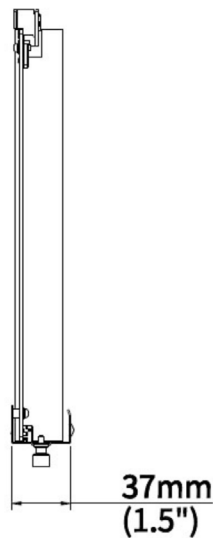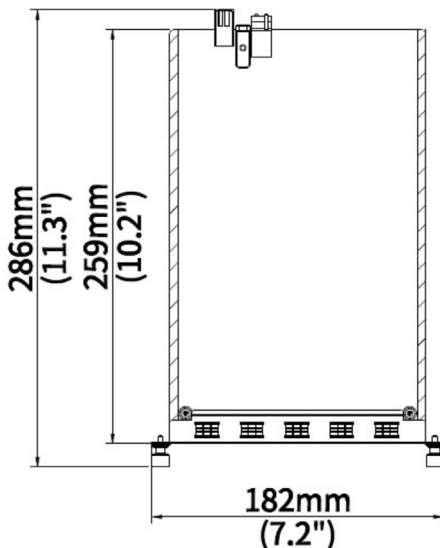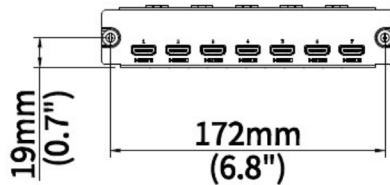

### Ordering Information

**VIS-HDMI7A:** 7 Channel H.265 Decoding Card  
TO BE USED WITH VN3A-64/128 ONLY