




VIS-POE24-2MAN 24-Port Managed PoE Switch

Features

- Layer 2 Managed PoE Switch
- With automatic detection and DHCP functions
- Support IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3ab
- 24-Port 10/100/1000Mbps supports 52V DC output
- 2-Port 1Gbps RJ45 + 2-Port 1.25Gbps SFP + 1-Port Console
- Complies with IEEE 802.3af/802.3at Power over Ethernet
- Single port maximum 30W output, total power 370W
- Auto detects powered device (PD)
- Remote power feeding up to 100m
- Supporting 8K absolute MAC addresses
- High back-plane bandwidth 56 Gbps
- Made of metal, rack-mount design
- EMI standards complies with FCC, CE class A

Model	VIS-POE24-2MAN
Power Supply Voltage	AC 100~240V
Power Consumption	370W for 24 PoE Port
Network Ports	1~26 Ports: 10/100/1000Mbps Ethernet port, adaptive control 2-Port 1.25Gbps SFP interface
Transmission Distance	100Meter(328ft) for RJ45 2Km 20Km for SFP Port The optical module is optional
PoE Power Supply Wattage	Each ports≤30W, No.1-4 PoE ports≤95W, Whole device<800W
Enetnet Standard	IEEE 802.3 / 802.3u / 802.3ab / 802.3x / 802.3z / 802.3af/at/bt / 802.3ad
Switch Capacity	176Gbps
Transfer Rate	14880pps for 10Mbps 148800pps for 100Mbps 1488000pps for 1000Mbps
MAC Address	32K MAC address table
PoE Indicator	Yellow light on: PD is connected Yellow light off: No PD is connected or power forwarding fails PoE pin assignmnet: V+(RJ45 Pin 1,2), V-(RJ45 Pin 3,6)
Network Port LED	On Green: The port connection speed is 1000Mbps On Orange: The port connection speed is 10/100Mbps Blinks: The port is receiving or transmitting data Off: The port is not linked successfully with the device
Working Temperature	32°F ~ 104°F (0°C ~ 40°C)
Storage Temperature	-40°F ~ 158°F (-40°C ~ 70°C)
Humidity(non-congeal)	0~85%
Enclosure Dimensions (L*W*H)	15.7 x 7.9 x 1.7 in (400mm×200mm×44mm)
Enclosure Color	Grey or Black
Enclosure Weight	6.8 lbs (3.10kg)

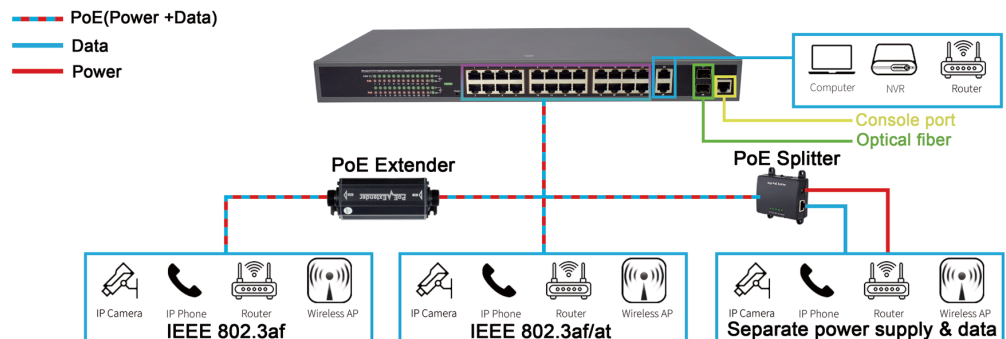

Ordering Information

VIS-POE24-2MAN: 24-Port Managed PoE Switch