




VIS-RSP15W

15W IP Ceiling Speaker with MIC, Indoor Only

Features

- High-Quality 15W Speaker – Loud, clear sound with long-range penetration
- Alarm Broadcast Integration – Works with Vision NVR/IPC for video and audio linkage
- Built-in Storage & Pre-Recorded Messages – Upload custom audio files and automate alerts
- Pre-loaded Alarm Files – Includes three built-in alarm sounds
- Two-Way Audio – Enables real-time communication
- PoE Powered – Simplifies installation with Power over Ethernet
- Indoor Recessed Mounting Only – Designed for ceiling installations
- ONVIF Compatibility – Works with IP camera VMS platforms
- Alarm & Event Triggers – Supports alarm input triggers for automated responses
- Scheduled Video Broadcasting – Configure daily or weekly broadcasts for announcements

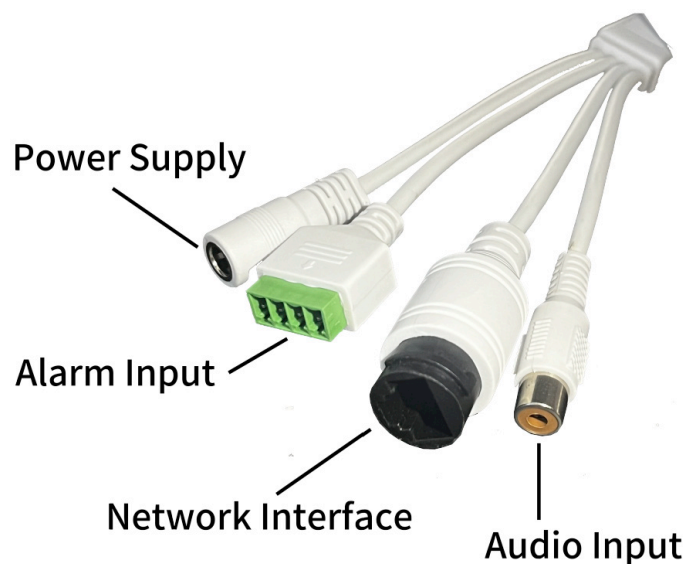

Ordering Information

VIS-RSP15W: 15W IP Ceiling Speaker

Model	VIS-RSP15W
Speaker	
Rated Power	15W
Max. Acoustic Pressure	100dBSPL
Frequency Response	100Hz to 15KHz
Impedance	8Ω
Material	
Material	Metal
Network	
Network Protocol	IPv4, HTTP, HTTPS, SSL/TLS, DNS, TCP, UDP, DHCP, UPnP, ARP, SSH
Interface Protocol (API)	ONVIF, RTSP, RTP, LAP
Browser	Windows: Firefox (version 87 and above), Chrome (version 90 and above), Edge (version 90 and above) ; MAC: Safari (version 17 and above)
Build in Mic	
Amount	1
Frequency Response	100Hz to 8KHz
Sensitivity	-37 dBV/Pa
Sampling Rate	8KHz
Quantization Bits	16 bit
Audio	
Broadcast	Regular Broadcast, Live Broadcast, Alarm Broadcast
Two-Way Audio	Support
Audio Compression	G.711U
Audio File Format	MP3, WAV
Audio File Size	2KB ≤ Audio File Size ≤ 10MB
Audio File Storage	64MB
Audio File Number	100 (Include system built-in files)
Language	
Language	38 languages: Simplified Chinese, Traditional Chinese, English, Vietnamese, Thai, Turkish, Spanish (Latin America), Portuguese (Brazil), Spanish, Portuguese, French, German, Italian, Dutch, Polish, Czech, Hungarian, Slovak, Russian, Hebrew, Arabic, Ukrainian, Estonian, Bulgarian, Greek, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenia, Serbia, Korean, Japanese, Latvian, Lithuanian, Persian
Interface	
Network Interface	1 RJ45 10M/100M self adaptive Ethernet Interface
Audio In	1, RCA
Alarm In	2
Power Supply	PoE (IEEE 802.3af), DC 12V/1.4A
Working Environment	
Working Temperature	14 °F ~ 122 °F (-10 °C ~ 50 °C)
Working Humidity	≤ 90% RH (non-condensing)
Dimensions	
Dimensions	Φ7.9"×3.7" (Φ200mm × 95mm) (Hole size: 180mm)

