

## VIS-P4TXIRA27135NH

4 Megapixel IP Plug & Play, Outdoor Vandal Turret, 2.7-13.5mm A/F Motorized, 131' EXIR Range, WDR, Built-in Mic, SD Card Slot, PoE/12VDC


### Features

- True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection
- 4 Megapixel Resolution
- Motorized Auto-Focus 2.7-13.5mm Lens
- True Day/Night with IR Range up to 131'
- Smart IRs
- Starlight Illumination
- Ultra H.265/H.265+/H.264/MJPEG Compression
- 30 FPS Recording and Live
- True WDR 120dB
- Micro SD Slot: Up to 256GB
- Built-in Mic
- IP67 Weatherproof
- IK10 Vandal Resistant
- 12VDC/PoE Operation
- ONVIF
- Free iOS & Android Apps for Smart Phones & Tablets
- Vision CMS
- Free MAC Client
- NDAA Compliant



Camera																
Sensor	1/3", 4.0megapixel, progressive scan, CMOS															
Minimum Illumination	Colour: 0.002Lux (F1.2, AGC ON) 0Lux with IR on															
Day/Night	IR-cut filter with auto switch (ICR)															
Shutter	Auto/Manual, 1 ~ 1/100000s															
Adjustment angle	Pan: 0° ~ 360° Tilt: 0° ~ 75° Rotate: 0° ~ 360°															
WDR	120dB															
S/N	>56dB															
Lens																
Lens	2.7 ~ 13.5mm, AF automatic focusing and motorized zoom lens															
Angle of view (H)	98.26° ~ 31.35°															
Angle of View (V)	54.76° ~ 18.55°															
Angle of View7 (O)	127.74° ~ 36.99°															
DORI																
DORI Distance	<table border="1"> <thead> <tr> <th>Lens (mm)</th> <th>Detect (ft)</th> <th>Observe (ft)</th> <th>Recognize (ft)</th> <th>Identify (ft)</th> </tr> </thead> <tbody> <tr> <td>2.7</td> <td>199.5 (60.8m)</td> <td>79.7 (24.3m)</td> <td>40 (12.2m)</td> <td>20 (6.1m)</td> </tr> <tr> <td>13.5</td> <td>996.7 (303.8m)</td> <td>398.6 (121.5m)</td> <td>199.5 (60.8m)</td> <td>99.7 (30.4m)</td> </tr> </tbody> </table>	Lens (mm)	Detect (ft)	Observe (ft)	Recognize (ft)	Identify (ft)	2.7	199.5 (60.8m)	79.7 (24.3m)	40 (12.2m)	20 (6.1m)	13.5	996.7 (303.8m)	398.6 (121.5m)	199.5 (60.8m)	99.7 (30.4m)
Lens (mm)	Detect (ft)	Observe (ft)	Recognize (ft)	Identify (ft)												
2.7	199.5 (60.8m)	79.7 (24.3m)	40 (12.2m)	20 (6.1m)												
13.5	996.7 (303.8m)	398.6 (121.5m)	199.5 (60.8m)	99.7 (30.4m)												
Illuminator																
IR Range	Up to 131ft (40m) IR range															
Wavelength	850nm															
IR On/Off Control	Auto/Manual															
Video																
Video Compression	Ultra 265,H.265, H.264, MJPEG															
H.264 code profile	Baseline profile, Main profile, High profile															
Frame Rate	<p>Main Stream: 4MP (2688*1520), Max 30fps; 4MP (2560*1440), Max 30fps; 3MP (2304*1296), Max 30fps; 1080P (1920*1080), Max 30fps;</p> <p>Sub Stream: 720P (1280*720), Max 30fps; D1 (720*576), Max 30fps; 640*360, Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps;</p> <p>Third Stream: D1 (720*576), Max 30fps; 640*360, Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps;</p>															
Video Bit Rate	128 Kbps~16 Mbps															
U-code	Support															
ROI	Up to 8 areas															
Video Stream	Triple streams															
OSD	Up to 8 OSDs															
Privacy Mask	Up to 4 areas															
Image																
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2															
Image Setting	Image rotation, brightness, saturation, contrast, sharpness, gain adjustable by web browser															
Digital Noise Reduction	2D/3D DNR															
Smart IR	Support															
Flip	Normal/Vertical/Horizontal/180°/90°Clockwise/90°Anti-clockwise															
Dewarping	N/A															
HLC	Supported															
BLC	Supported															
Defog	Digital Defog															
Intelligent																
Smart intrusion prevention	Support false alarm filtering: Line crossing detection, Intrusion detection, Region entrance detection, Region exit detection															
Face capture	Support															
Statistical Analysis	People counting, support tripwire people counting & area people counting															
Events																
Basic Detection	Motion detection, tampering alarm, audio detection															
General Function	Watermark, IP address filtering, access policy, ARP protection, RTSP authentication, user authentication															

Audio	
Audio Compression	G.711
Audio Bitrate	64 Kbps
Suppression	Supported
Sampling Rate	8KHZ
Storage	
Edge Storage	Micro SD, up to 256GB
Network Storage	ANR, NAS(NFS)
Network	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, RTMP,SSL/TLS, SSH
Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API,SDK
Client	<p>InVid Vision (Mobile App)</p> <p>Vision Tools (IP Utility)</p> <p>InVid CMS</p>
Web Browser	<p>Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below</p> <p>Plug-in free live view: Chrome 57.0+, Firefox 58.0+, Edge 16+</p>
Interface	
Audio I/O	N/A
Alarm I/O	N/A
RS485	N/A
Built-in Mic	Support
Audio Sensitivity	-32±3dB
Built-in Speaker	N/A
WIFI	N/A
Network	1 RJ45 10M/100M Base-TX Ethernet
Video Output	N/A
Certifications	
EMC	FCC CFR 47 Part 15 EN 55032:2015 EN 55024:2010 EN 61000-3-2:2014 EN 61000-3-3-2013
Safety	IEC 62368-1 EN 62368-1 UL 62368-1
Environment	CE-ROHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU); REACH (Regulation (EC) No 1907/2006)
Protection	Ingression protection: IP67 (IEC 60529-2013) Vandal resistant: IK10 (IEC 62262:2002)
General	
Power	DC 12V±25%, PoE (IEEE 802.3af) Power consumption: Max 7.0W
Power Interface	Ø 5.5mm coaxial power plug
Dimensions (Ø x H)	Ø5.1" x 4.3" (Ø129 x 110mm)
Weight	1.52lb (0.69kg)
Material	Metal
Working Environment	-22°F ~ 140°F (-30°C ~ 60°C), Humidity: ≤95% RH (non-condensing)
Storage Environment	-22°F ~ 140°F (-30°C ~ 60°C), Humidity: ≤95% RH (non-condensing)
Surge Protection	6KV
Reset Button	Supported

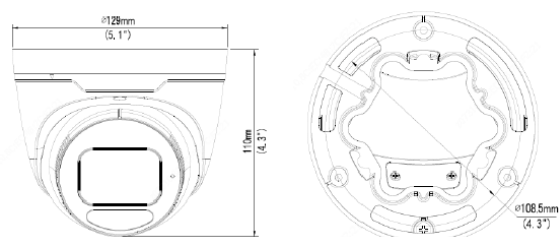

### Ordering Information

**VIS-P4TXIRA27135NH: 4 Megapixel Turret, 2.7-13.5mm Lens**

InVid Tech, reserves the right to make changes to improve our products at any time without notice; we are not responsible for misprints.