



VN3A-32X16



32 Ch NVR with 16 Plug & Play Ports, 320 Mbps, 4K, With Cloud Upgrade, RAID

Features

- 32 Channel with 16 Plug & Play Ports for easy camera setup PoE (Power Over Ethernet) available on all ports
- Up to 12 Megapixel Resolution Recording
- 320 Mbps Bit Rate Input
- Supports up to 16 channel simultaneous playback
- Smart Analytic Support/8ch SIP Max
- Works with ONVIF or other supported IP cameras
- Local HDMI main monitor output with 4K Support
- Local HDMI & VGA main monitor output up to 1080p
- P2P Vision Stream Connect for Networking
- Multiple video search options including Smart Search for quick retrieval of footage
- RAID Support
- Ultra 265/ H.265/H.264
- Upgrade your recorder via the Cloud
- Free Central Management Software (CMS)
- Free iOS & Android Apps for Smart Phones & Tablets (InVid Vision)
- Free MAC Client

Model	VN3A-32X16
Video/Audio Input	
IP Video Input	32-ch
Two-way Audio Input	1-ch, RCA
Network	
Incoming Bandwidth	320Mbps
Outgoing Bandwidth	320Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP, NFS
Browser	IE(IE10/11) for Windows Firefox (version 52.0 and above) for Windows Chrome(version 45 and above) for Windows Edge(version 79 and above) for Windows
Video/Audio Output	
HDMI/VGA Output	VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI: 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, RCA
Audio Compression	G.711A, G.711U
Synchronous Playback	16-ch
Live View Display	1/4/6/8/9/16/25/36
Corridor Mode Screen	3/4/5/7/9/10/12/16/32
Snapshot	
FTP/Schedule/Event Snapshot	16-ch snapshot, up to 1080P resolution
Decoding	
Decoding Format	Ultra 265, H.265, H.264
Live View/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Playback Capability	1 x 12MP@30, 2 x 4K@30, 5 x 4MP@30, 10 x 1080P@30, 22 x 720P@30, 32 x D1

Hard Disk	
SATA	4 SATA interfaces
Capacity	Up to 18TB WD & 20TB Seagate for each disk (The maximum HDD capacity varies with environment temperature)
eSATA	NA
Disk Group	Support
RAID	RAID 1,5
Smart	
VCA Detection by Camera	Face Detection, Face Comparison, Intrusion Detection, Cross Line Detection, Enter Area, Leave Area, Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, Ultra Motion Detection(UMD)
VCA Search	Face Search, Face Comparison Search, Behavior Search, Vehicle Search
People Counting	People Flow Counting, Crowd Density Monitoring
Smart Intrusion Prevention (SIP) by Camera	Total 8-ch
General Alarm	
General Alarm	Motion, Tampering, Human Body Detection, Video Loss, Input Alarm, Audio Detection
Alert Alarm	IP Conflict, Network Disconnected, Disk Offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal
External Interface	
Network Interface	1 RJ45 10M/100M/1000M self-adaptive Ethernet Interfaces
USB Interface	Front panel: 1 x USB2.0, Rear panel: 1 x USB3.0
RS232	NA
RS485	1
Alarm In	16-ch
Alarm Out	4-ch
PoE	
Interface	16 RJ-45 10M/100M self-adaptive Ethernet Interface
Max Power	Max 30W for single port Max 150W in total
Supported Standard	IEEE 802.3af/at
General	
Power Supply	12V DC/5A Power Consumption: ≤ 12 W (without HDD)
Working Environment	14°F ~ 131°F (-10°C ~ 55°C), Humidity ≤ 90% RH (non-condensing)
Dimensions (W×D×H)	15.7" × 14.3" × 2.9" (400mm × 363mm × 74mm)
Weight (without HDD)	≤ 8.82lb (4Kg)
Certification	
Certification	CE, FCC, UL, RoHS, WEEE
CE	EN 55032: 2015, EN 61000-3-3: 2013, EN IEC 61000-3-2: 2019, EN 55035: 2017
FCC	Part15 Subpart B, ANSI C63.4

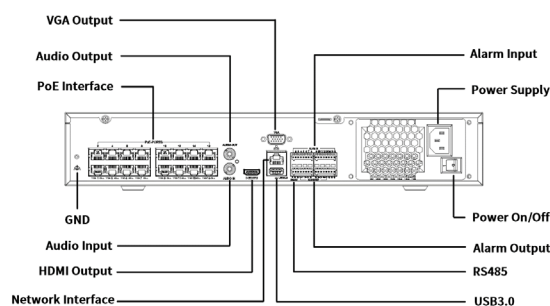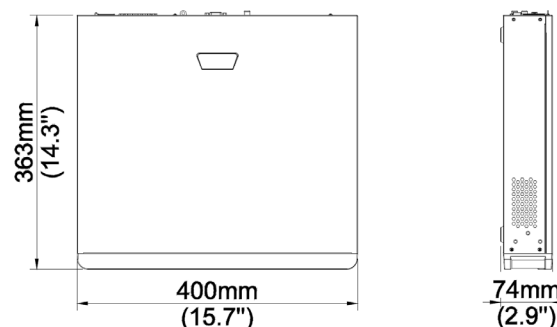

Ordering Information

VN3A-32X16: 32 Ch NVR with 16 Plug & Play Ports