



VN5A-32

32 Ch NVR, 192 Mbps, 2 HD Bays, 4K, With Cloud Upgrade, Text Search and Smart Features

Features

- Smart Analytic Support/Text Search/ACCU Search
- (2) NIC Cards: Connect Cameras via Switch Behind Closed Network
- Up to 16 Megapixel Resolution Recording
- 192 Mbs Bit Rate Input (Smart Mode Off/On)
- Supports up to 16 channel simultaneous playback
- Cloud Upgradeable
- Works with ONVIF or other supported IP cameras (Profile S/G/T)
- Local Dual HDMI main monitor output with 4K Support
- Local Dual VGA main monitor output up to 1080p
- P2P Vision Stream Connect for Networking
- Multiple video search options including SmartSearch for quick retrieval of footage
- Ultra H.265/H.265/H.264 video compression
- Free iOS & Android Apps for Smart Phones & Tablets
- Free Central Management Software (CMS) for PC/MAC
- NDAA Compliant

Model	VN5A-32
Decoding	
Decoding Format	Ultra 265, H.265, H.264
Decoding Capability	Smart Off: 4 x 16MP@30, 8 x 4K@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30 Smart On: 2 x 16MP@30, 4 x 4K@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30, 32 x 720P@30
Decoding Capability	The resolution of each channel cannot exceed 4096 pixels in length or width
Audio Compression	G.711A, G.711U
Network	
Incoming Bandwidth	192 Mbps
Outgoing Bandwidth	192 Mbps
Max Users Can Be Added	32
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP, NFS, IPv6, IPv4
Browser (Plugin)	IE10, IE11, Chrome 45+, Edge 79+, Firefox 52+
Video/Audio Input	
IP Video Input	32-ch
RCA Audio Input	1-ch
Peripheral Input	
IP Speaker	16-ch
POS	All channels
Video/Audio Output	
Video Output	Support 2-ch HDMI, 2-ch VGA, HDMI1 and VGA1 simultaneous output, HDMI2 and VGA2 simultaneous output, HDMI1/VGA1 and HDMI2/VGA2 independent output
HDMI Output	4K (3840 x 2160)/30 Hz, 1920 x 1080/60 Hz, 1600 x 1200/60 Hz, 1280 x 1024/60 Hz, 1280 x 720/60 Hz, 1024 x 768/60 Hz
VGA Output	1920 x 1080/60 Hz, 1600 x 1200/60 Hz, 1280 x 1024/60 Hz, 1280 x 720/60 Hz, 1024 x 768/60 Hz
HDMI Standard	HDMI2.0

RCA Audio Output	2-ch
Liveview Display	1/4/6/8/9/16/25/32
Default Num of Live Screen	32
Corridor Mode Screen	3/4/5/7/9/10/12/16/32
Playback Screen	1/4/9/16
Corridor Mode Screen of Playback	1/3
Two-way Audio	
Two-way Audio	1-ch, RCA (Using the audio input and output)
Snapshot	
FTP/Schedule/Event Snapshot	16-ch snapshot (max. 8 MP (3840 x 2160) video resolution, with 1080P snapshot resolution)
Recording	
Recording Resolution	16 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080P/960P/720P/D1/2CIF/CIF
Num of Concurrent Playback	32-ch
Synchronous Playback in Local	16-ch
Smart	
Smart by IPC	All channels (up to 16 images/s in total) Face Detection, Face Comparison, Vehicle Detection (LPR), Temperature Detection, SIP, UMD, Video Metadata, Traffic Monitoring
Smart by NVR	Face Detection, Face Comparison, Smart Intrusion Prevention (SIP), Behavior Analysis, Elevator Entrance Detection, Illegally Parked Motor Vehicle, Evacuation Route Obstruction, People Counting (People Flow Counting, Crowd Density Monitoring)
Smart by NVR Analyzer Mode	Modes cannot active simultaneously, only one mode can active at a time.
VCA Search	Face Snapshot Search, Face Comparison Search, Motor Vehicle Search, Non-Motor Vehicle Search, Human Body Search, General Search, People Counting Report, AcuSearch, SmartSearch+
SeekFree	All channels with Vision SIP/UMD Camera, Up to 16-ch with normal camera (Vision Non SIP and Third-part brand, 16-ch 2MP, 8-ch 4MP, 4-ch 4K)
SeekFree Language	English/Spanish/French
by NVR	All channels with Vision SIP/UMD Camera, Up to 16-ch with normal camera (Vision Non SIP and Third-part brand, 16-ch 2MP, 8-ch 4MP, 4-ch 4K)
Search by Image	Support
SIP by NVR with normal cameras	Up to 16-ch with normal camera (Vision Non SIP and Third-part brand, 16-ch 2MP, 8-ch 4MP, 4-ch 4K)
by NVR	No Helmet Detection, No Chef Hat Detection, No Work Clothes Detection, Smoking Detection, Smoke and Fire Detection, Calling Detection, No Mask Detection, Rat Detection, Long Stay Detection, Fall Detection, Fight Detection, Absence Detection, Climbing Detection, Sleep on Duty Detection, People Counting, Using Mobile Phone Detection, People Gathering, People Dispersion, Quick Moving
Video Metadata by NVR with normal cameras	Up to 16-ch with normal camera (Vision Non SIP and Third-part brand, 16-ch 2MP, 8-ch 4MP, 4-ch 4K)
Video Metadata by NVR	Motor Vehicle: Vehicle Type, Vehicle Color, Vehicle Brand, Direction, Plate Type, Plate Color, Human Body: Gender, Age, Mask, Hairstyle, Bag Style, Direction, Upper Garment Length, Lower Garment Length, Upper Garment Color, Lower Garment Color, Non-Motor Vehicle: Non-Motor Vehicle Type, Direction, Gender, Age, Upper Garment Length, Upper Garment Color
Vehicle Picture Library	Up to 5 vehicle picture libraries, with up to 25,000 vehicle pictures in total
Capacity of Snapshot Records	2 millions records for face snapshot, 2 millions records for behavior analysis and SIP



Ordering Information

VN5A-32: 32 Ch NVR

See page 2

Alarm	
Alert Alarm	IP Conflict, Network Disconnected, Disk Offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal, Array Damaged, Array Degraded
GUI Language	
GUI Language	38 languages: Simplified Chinese, Traditional Chinese, English, Vietnamese, Thai, Turkish, Spanish (Latin America), Portuguese (Brazil), Spanish, Portuguese, French, German, Italian, Dutch, Polish, Czech, Hungarian, Slovak, Russian, Hebrew, Arabic, Ukrainian, Estonian, Bulgarian, Greek, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenia, Serbia, Korean, Japanese, Latvian, Lithuanian, Persian
Hard Disk	
SATA	2 SATA Interfaces
Capacity	Up to 24 TB for each HDD (The maximum HDD capacity varies with environment temperature and hard disk size, The environment temperature for use should not exceed 40°C)
Disk Group	Support
Redundant Storage	Support
External Interface	
Network Interface	2 RJ45 10 M/100 M/1000 M self-adaptive Ethernet Interface
Network Working Mode	Multi-access, load balance, network fault-tolerance
USB	Front panel: 1 × USB2.0, Rear panel: 2 × USB3.0
RS485	1
RS232	1
Alarm In	16-ch
Alarm Out	4-ch
Power Output	12 V
Buzzer	Support
Power Supply	DC 12 V/5 A

Working Environment	
Working Temperature	14°F ~ 131°F (-10°C ~ 55°C)
Working Humidity	≤ 90% RH (non-condensing)
Power Consumption (without HDD)	≤25W
Heat Dissipation	Fan, Radiator
Dimensions	
Weight (without HDD)	(1.87 KG)
Height	1U
Dimensions	15.0" × 12.7" × 2.1" (380mm × 322.4mm × 53mm)
Certification	
Certification	CE; FCC; UL; RoHS; WEEE
CE	EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035
FCC	Part15 Subpart B
Compliance	
NDAA Compliant	Support
Feature Supported	
Downlink ONVIF	Support (Profile S)
Uplink ONVIF	N/A
NAS	Support
Ucode Basic Mode	Support

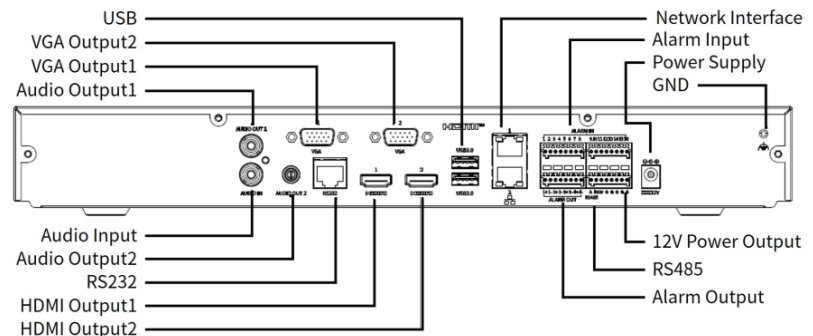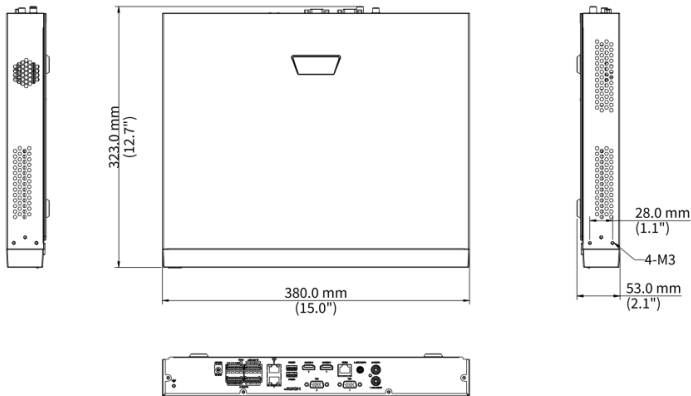

Ordering Information
VN5A-32: 32 Ch NVR