


PARAMONT SERIES

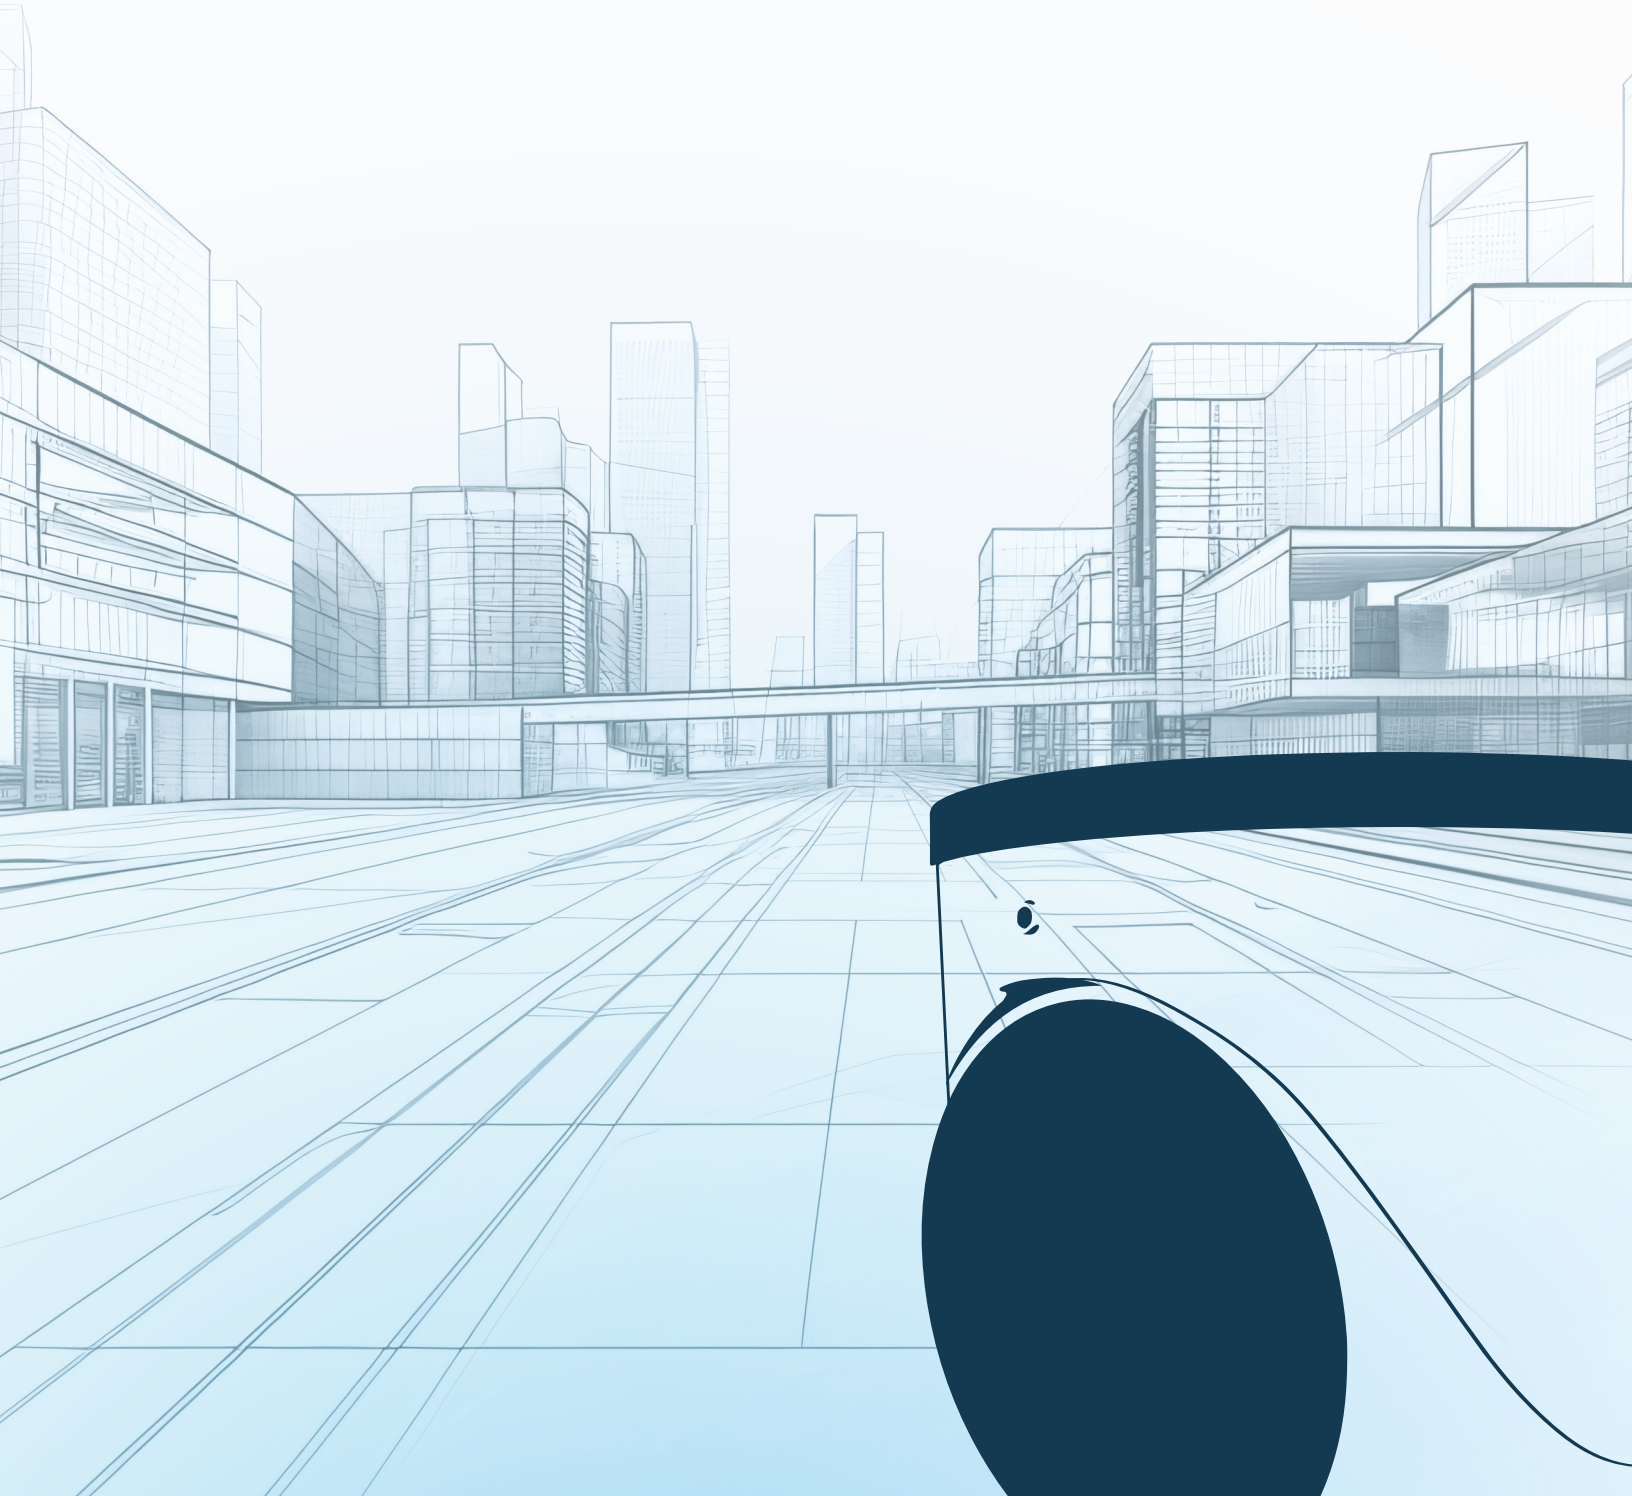

PARAMONT

IP & HD Analog Security Surveillance

InVid Tech's Paramount Series offers a complete lineup of products that will secure any application.

NDAA Compliant Product Options

InVid Tech offers a wide range of NDAA Compliant cameras & recorders when you need to meet NDAA Compliance.

Illuminate Color at Night

Color at Night without White Lights or IRs. These cameras pick up all available light 27/7, including street lights, lights on a house, and even the moon! InVid Illuminate provides a full-color picture in the darkest scenarios.

Cloud Storage

We have options from 1-week all the way up to 3-years for video surveillance backup and redundancy.

True Ai Human & Vehicle Classification

Ai Technology offers Line Crossing & Intrusion Detection that triggers the camera to record. You set up lines and areas within a camera's view to trigger the camera to record when tripped. These lines are set in either a single direction or both. InVid Tech AI cameras go a step further. The cameras will only trip when it detects a human or vehicle.

True LPR Facial Recognition Alerts

Cameras that deliver License Plate Recognition and Facial Recognition to provide you with real-time alerts for instant notification.

Specialty Products

Cameras with Strobes, Sirens, 2-Way Microphones, Specialty Features & Designs.

2-Megapixel - IP

| | Model # | Lens | Built-in Mic | Built-In Speaker | Features | Mounts | Plugin-Free |
|--|---------------------|-------------------|--------------|------------------|--|-------------------------------------|-------------|
| | PAR-P2DOORBELL | 2.3mm, Fixed | • | • | IR Range up to 3.3'; Visual intercom function, 12VDC/PoE, IP66, Standard doorbell, WiFi Add to Paramount NVR | Surface Included | Yes |
| | PAR-P2ELEV29NH | 2.8mm, Fixed | / | / | IR Range up to 82', Indoor Only, 12VDC/PoE | N/A | Yes |
| | PAR-P2FACE722G1 | 7-22mm, Motorized | / | / | White Light Detection, IP67, 12VDC/PoE True Facial Recognition, Starlight | IPM-JB4A | No |
| | PAR-P2FACEBIR8G1 | 8mm, Fixed | / | / | IR Range up to 98'; White Light Detection, IP67, 12VDC/PoE True Facial Recognition, Starlight | IPM-JB6 | No |
| | PAR-P2FACETXIR722G2 | 7-22mm, Motorized | • | / | White Light Range up to 32', IP67, 12VDC/PoE, True Facial Recognition, Starlight | IPM-JB4A | No |
| | PAR-P2PTZXIR25-AI | 4.8-120mm | / | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, Auto-Tracking, IR Range up to 492', IP66, 12VDC/PoE+ | Included wall mount & IPM-PTZWALLJB | Yes |






4-Megapixel - IP

| | Model # | Lens | Built-in Mic | Built-In Speaker | Features | Mounts | Plugin-Free |
|--|--|-------------------------------------|--------------|------------------|--|---|-------------|
| | PAR-P4BIR28NH-AI | 2.8mm, Fixed | / | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, People Counting, IR Range up to 98', IP67, 12VDC/PoE | IPM-JB6 | Yes |
| | PAR-P4BIR36NH-AI | 3.6mm, Fixed | / | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, People Counting, IR Range up to 98', IP67, 12VDC/PoE | IPM-JB6 | Yes |
| | PAR-P4BIRA2812NH-AI | 2.8-12mm, Motorized | / | / | True AI Human & Vehicle Classification for Line Crossing & Intrusion Detection, People Counting, IR up to 164', IP67, 12VDC/PoE | IPM-JB6 | Yes |
| | PAR-P4BIRA2812NH-AIWL | 2.8-12mm, Motorized | • | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, White Light Supplement: AI Triggered, IR Range up to 131', IP67, 12VDC/PoE | IPM-JB6 | Yes |
| | PAR-P4BIRA2812NH-AIWLTL | 2.8-12mm, Motorized | • | • | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, Red/Blue Flashing Deterrent Light and/or Siren: AI Triggered, White Light for Color at Night: AI Triggered, People Counting, IP66, 12VDC/PoE | IPM-JB6 | Yes |
| | PAR-P4DRIR28NH-AI | 2.8mm, Fixed | • | / | True AI Human & Vehicle Classification for Line Crossing & Intrusion Detection, People Counting, IR Range up to 98', IP67, 12VDC/PoE | IPM-JB7 IPM-TXWM1A | Yes |
| | PAR-P4DRIR28NH-AIJB (Black Housing) | 2.8mm, Fixed | • | / | True AI Human & Vehicle Classification for Line Crossing & Intrusion Detection, People Counting, IR Range up to 98', IP67, 12VDC/PoE | IPM-JB8 IPM-WALLMOUNT2 (Use w/IPM-JB8) | Yes |
| | PAR-P4DRIRA2812NH-AI | 2.8-12mm, Motorized | • | / | True AI Human and Vehicle Classification for Line Crossing & Intrusion Detection, People Counting, IR Range up to 164', IP67, 12VDC/PoE | IPM-JB8 IPM-WALLMOUNT2 (Use w/IPM-JB8) | Yes |
| | PAR-P4LPR832NH | 8-32mm, Motorized | / | / | IR Range up to 328'; Starlight Illumination, IP67, 12VDC/PoE, License Plate Recognition | IPM-JB4A | Yes |
| | PAR-P4PTZXIR25NH-AI2 | 4.8-120mm | / | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, Auto-Tracking, IR Range up to 328', IP66, 24VDC/24VAC/PoE++ | Included wall mount & IPM-PTZWALLJB | Yes |
| | PAR-P4PTZXIR2812NH-AIWL | 2.8-12mm, Motorized | • | • | True AI Human & Vehicle Classification for Line Crossing & Intrusion Detection, Flashing White Deterrent Light and/or Siren: AI Triggered, Auto-Tracking, IR Range up to 164', IP66, 12VDC/PoE+ | IPM-PANJB IPM-PANWALL (Use w/ IPM-PANJB) | Yes |
| | PAR-P4RICS-AI | Lens Sold Separately (ICL-2812DCMP) | / | / | True AI Human and Vehicle Classification for Line Crossing & Intrusion Detection, People Counting, Indoor, 12VDC/24VAC/PoE | N/A | Yes |
| | PAR-P4TXIR28NH-AI | 2.8mm, Fixed | • | / | True AI Human and Vehicle Classification for Line Crossing & Intrusion Detection, People Counting, IR Range up to 98', IP67, 12VDC/PoE | IPM-JB6 IPM-TXWM1A | Yes |
| | PAR-P4TXIR28BNH-AI | 2.8mm, Fixed | • | / | True AI Human and Vehicle Classification for Line Crossing & Intrusion Detection, IR Range up to 98', IP67, 12VDC/PoE | IPM-JB6B IPM-TXWM1A | Yes |
| | PAR-P4TXIRA2812NH-AI | 2.8-12mm, Motorized | • | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, People Counting, IR Range up to 164', IP67, 12VDC/PoE | IPM-JB4A IPM-WALLMOUNT2 IPM-TXWM1A (Use w/IPM-JB4A) | Yes |
| | PAR-P4TXIRA2812NH-AIWL | 2.8-12mm, Motorized | • | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, White Light Supplement: AI Triggered, IR Range up to 131', IP67, 12VDC/PoE | IPM-JB4A IPM-WALLMOUNT2 IPM-TXWM1A (Use w/IPM-JB4A) | Yes |
| | PAR-P4TXIRA2812NH-AIWLTL | 2.8-12mm, Motorized | • | • | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, Red/Blue Flashing Deterrent Light and/or Siren: AI Triggered, White Light for Color at Night: AI Triggered, People Counting, IP66, 12VDC/PoE | IPM-JB4A IPM-WALLMOUNT2 IPM-TXWM1A (Use with IPM-JB4A) | Yes |
| | PAR-P4UFO28NH-AI | 2.8mm, Fixed | • | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, People Counting, IP66, IR Range up to 65', 12VDC/PoE | IPM-TXWM1A | Yes |

5-Megapixel - IP

| | Model # | Lens | Built-in Mic | Built-In Speaker | Features | Mounts | Plugin-Free |
|--|----------------------|---------------------|--------------|------------------|---|---|-------------|
|  | PAR-P5BIR28-LC2 | 2.8mm, Fixed | • | / | First Level Human and Vehicle Classification, IR Range up to 65', IP67, 12VDC/PoE | IPM-JB6 | Yes |
|  | PAR-P5BIRA2812-LC2 | 2.8-12mm, Motorized | • | / | First Level Human and Vehicle Classification, IR Range up to 164', IP67, 12VDC/PoE | IPM-JB6 | Yes |
|  | PAR-P5BIRA2812NH-AI | 2.8-12mm, Motorized | / | / | True AI Human & Vehicle Classification for Line Crossing & Intrusion Detection, People Counting, IR Range up to 164', IP67, 12VDC/PoE | IPM-JB6 | Yes |
|  | PAR-P5BXIR17-LC | 1.7mm, Fixed | / | / | Wide Angle, IP66, 12VDC/PoE | N/A | Yes |
|  | PAR-P5DRIR28-LC2 | 2.8mm, Fixed | • | / | First Level Human and Vehicle Classification, IR Range up to 98', IP67, 12VDC/PoE | IPM-JB7 IPM-TXWM1A | Yes |
|  | PAR-P5DRIR28NH-AI | 2.8mm, Fixed | • | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, People Counting, IR Range up to 98', IP67, 12VDC/PoE | IPM-JB7 IPM-TXWM1A | Yes |
|  | PAR-P5DRIR28NH-HDMI | 2.8mm, Fixed | / | / | HDMI Output- Type D To Type A, Logo & Message Display Technology, IR Range up to 65', IP66, 12VDC/PoE | IPM-WALLFIXDOME IPM-JBFXDOME IPM-JBMINIBOX | Yes |
|  | PAR-P5DRIRA2812-LC2 | 2.8-12mm, Motorized | • | / | First Level Human and Vehicle Classification, IR Range up to 262', IP67, 12VDC/PoE | IPM-JB8 IPM-WALLMOUNT2 (Use with IPM-JB8) | Yes |
|  | PAR-P5DRIRA2812NH-AI | 2.8-12mm, Motorized | • | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, IR Range up to 164', IP67, 12VDC/PoE | IPM-JB8 IPM-WALLMOUNT2 (Use with IPM-JB8) | Yes |
|  | PAR-P5TXIR28-LC2 | 2.8mm, Fixed | • | / | First Level Human and Vehicle Classification, IR Range up to 98', IP67, 12VDC/PoE | IPM-JB6 IPM-TXWM1A | Yes |
|  | PAR-P5TXIR28B-LC2 | 2.8mm, Fixed | • | / | First Level Human and Vehicle Classification, IR Range up to 98', IP67, 12VDC/PoE | IPM-JB6B IPM-TXWM1A | Yes |
|  | PAR-P5TXIR28NH-AI | 2.8mm, Fixed | • | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, IR Range up to 98', IP67, 12VDC/PoE | IPM-JB6 IPM-TXWM1A | Yes |
|  | PAR-P5TXIR28NH-WL | 2.8mm, Fixed | • | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, White Light up to 98', IP67, 12VDC/PoE | IPM-JB6 IPM-TXWM1A | Yes |
|  | PAR-P5TXIRA28-LC | 2.8mm, Fixed | • | / | IR Range up to 98', IP67, 12VDC/PoE | IPM-JB6 IPM-TXWM1A | Yes |
|  | PAR-P5TXIRA2812-LC2 | 2.8-12mm, Motorized | • | / | First Level Human and Vehicle Classification, IR Range up to 164', IP67, 12VDC/PoE | IPM-JB4A IPM-WALLMOUNT2 IPM-TXWM1A (Use with IPM-JB4A) | Yes |
|  | PAR-P5TXIRA2812NH-AI | 2.8-12mm, Motorized | • | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, People Counting, IR Range up to 164', IP67, 12VDC/PoE | IPM-JB4A IPM-WALLMOUNT2 IPM-TXWM1A (Use with IPM-JB4A) | Yes |
|  | PAR-P5UFO28NH-AI | 2.8mm, Fixed | • | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, People Counting, IP66, IR Range up to 65', 12VDC/PoE | IPM-TXWM1A | Yes |

6-Megapixel - IP

| | Model # | Lens | Built-in Mic | Built-In Speaker | Features | Mounts | Plugin-Free |
|--|----------------------|--|--------------|------------------|---|--|-------------|
|  | PAR-P6BIR28NH-AI | 2.8mm, Fixed | • | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, People Counting, IR Range up to 98', IP67, 12VDC/PoE | IPM-JB6 | Yes |
|  | PAR-P6BIRA2812NH-AI | 2.8-12mm, Motorized | • | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, People Counting, IR Range up to 164', IP67, 12VDC/PoE | IPM-JB6 | Yes |
|  | PAR-P6TXIR28NH-AI | 2.8mm, Fixed | • | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, People Counting, IR Range up to 98', IP67, 12VDC/PoE | IPM-JB6 | Yes |
|  | PAR-P6TXIRA2812NH-AI | 2.8-12mm, Motorized | • | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, People Counting, IR Range up to 164', IP67, 12VDC/PoE | IPM-JB4A | Yes |
|  | PAR-P6PANNH | 1.1mm Fixed 360° View Dewarping Capabilities | • | / | IR Range up to 98', CVBS Video Output, Indoor, 12VDC/PoE | IPM-PANJB IPM-PANWALL (Use w/ IPM-PANJB) | No |











12-Megapixel - IP

| | | | | | | | |
|--|--------------|---|---|---|--|--|-----|
| | PAR-P12PANNH | 1.68mm Fixed 360° View Dewarping Capabilities | . | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, Heat Mapping, IR Range up to 65', CVBS Video Output, IP67, 12VDC/PoE | IPM-PANJB IPM-PANWALL (Use w/ IPM-PANJB) | Yes |
|--|--------------|---|---|---|--|--|-----|

8-Megapixel - IP

| | Model # | Lens | Built-in Mic | Built-In Speaker | Features | Mounts | Plugin-Free |
|--|--|---------------------------------------|--------------|------------------|---|---|-------------|
| | PAR-P8BIR28-LC2 | 2.8mm, Fixed | / | / | First Level Human and Vehicle Classification, IR Range up to 98', IP67, 12VDC/PoE | IPM-JB6 | Yes |
| | PAR-P8BIR28NH-AI | 2.8mm, Fixed | / | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, People Counting, IR Range up to 98-164', IP67, 12VDC/PoE | IPM-JB6 | Yes |
| | PAR-P8BIRA2812-LC2 | 2.8-12mm, Motorized | / | / | First Level Human and Vehicle Classification, IR Range up to 164', IP67, 12VDC/PoE | IPM-JB6 | Yes |
| | PAR-P8BIRA2812NH-AI | 2.8-12mm, Motorized | / | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, People Counting, IR Range up to 229', IP67, 12VDC/PoE | IPM-JB4A IPM-WALLMOUNT2 (Use with IPM-JB4A) | Yes |
| | PAR-P8DRIR28-LC2 | 2.8mm, Fixed | . | / | First Level Human and Vehicle Classification, IR Range up to 98', IP67, 12VDC/PoE | IPM-JB7 IPM-TXWM1A | Yes |
| | PAR-P8DRIR28NH-AI | 2.8mm, Fixed | . | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, People Counting, IR Range up to 98', IP67, 12VDC/PoE | IPM-JB7 IPM-TXWM1A | Yes |
| | PAR-P8DRIRA2812-LC2 | 2.8-12mm, Motorized | . | / | First Level Human and Vehicle Classification, IR Range up to 164', IP67, 12VDC/PoE | IPM-JB8 IPM-WALLMOUNT2 (Use with IPM-JB8) | Yes |
| | PAR-P8DRIRA2812NH-AI | 2.8-12mm, Motorized | . | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, People Counting, IR Range up to 164', IP67, 12VDC/PoE | IPM-JB8 IPM-WALLMOUNT2 (Use with IPM-JB8) | Yes |
| | PAR-P8PAN360-AI | 4mm lens x 4ch (Single View/ Ch) | / | / | True AI Human & Vehicle Classification for Line Crossing & Intrusion Detection, IR Range up to 49', IP66, 24VAC/24VDC/PoE+ | IPM-PTZWALLJB IPM-PTZWALL1 | No |
| | PAR-P8PANMULTI-AI | 3.2mm lens x 4 (Stitched Single View) | / | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, IR Range up to 65', IP67, 12VDC/PoE | IPM-JB8 IPM-WALLMOUNT2 (Use with IPM-JB8) | Yes |
| | PAR-P8PTZXIR25NH-AI | 4.8-120mm | / | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, IR Range up to 492', IP66, 12VDC 3 Amp/PoE+ | Included wall mount & IPM-PTZWALLJB | Yes |
| | PAR-P8TXIR28-LC2 | 2.8mm, Fixed | . | / | First Level Human and Vehicle Classification, IR Range up to 98', IP67, 12VDC/PoE | IPM-JB6 IPM-TXWM1A | Yes |
| | PAR-P8TXIR28BNH-AI | 2.8mm, Fixed | . | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, People Counting, IR Range up to 98', IP67, 12VDC/PoE | IPM-JB6B IPM-TXWM1A | Yes |
| | PAR-P8TXIR28NH-AI | 2.8mm, Fixed | . | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, People Counting, IR Range up to 98', IP67, 12VDC/PoE | IPM-JB6 IPM-TXWM1A | Yes |
| | PAR-P8TXIRA2812-LC2 | 2.8-12mm, Motorized | . | / | First Level Human and Vehicle Classification, IR Range up to 164', IP67, 12VDC/PoE | IPM-JB4A IPM-WALLMOUNT2 (Use with IPM-JB4A) IPM-TXWM1A | Yes |
| | PAR-P8TXIRA2812NH-AI | 2.8-12mm, Motorized | . | / | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, People Counting, IR Range up to 164', IP67, 12VDC/PoE | IPM-JB4A IPM-WALLMOUNT2 (Use with IPM-JB4A) IPM-TXWM1A | Yes |
| | PAR-P8TXIR28NH-AIWL | 2.8mm, Fixed | . | . | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, Red/Blue Flashing Deterrent Light and/or Siren: Ai Triggered, White Light for Color at Night: Ai Triggered, People Counting, IR Range up to 131', IP66, 12VDC/PoE | IPM-JB4A | Yes |
| | PAR-P8BIR28NH-AIWL | 2.8mm, Fixed | . | . | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, Red/Blue Flashing Deterrent Light and/or Siren: Ai Triggered, White Light for Color at Night: Ai Triggered, People Counting, IR Range up to 131', IP66, 12VDC/PoE | IPM-JB6 | Yes |
| | PAR-P8TXIRA2812NH-AIWL PAR-P8TXIRA2812NH-AIWLJB (Black Housing) | 2.8-12mm, Motorized | . | . | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, Red/Blue Flashing Deterrent Light and/or Siren: Ai Triggered, White Light for Color at Night: Ai Triggered, People Counting, IR Range up to 131', IP66, 12VDC/PoE | IPM-JB4A | Yes |
| | PAR-P8BIRA2812NH-AIWL | 2.8-12mm, Motorized | . | . | True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection, Red/Blue Flashing Deterrent Light and/or Siren: Ai Triggered, White Light for Color at Night: Ai Triggered, People Counting, IR Range up to 131', IP66, 12VDC/PoE | IPM-JB4A | Yes |






NVRs

| | Model # | Channel | HD Bays | Resolution | PoE Channels | LAN Ports | Plugin-Free | Face Recognition |
|--|-----------------|---------|---------|------------|--------------|-----------|-------------|------------------|
|  | PN1A-16X16-2NH2 | 16 | 2 | 8 | 16 | 1 | Yes | No |
|  | PN1A-32X16F | 32 | 8 | 12 | 16 | 1 | Yes | Yes |
|  | PN1B-4X4NH2 | 4 | 1 | 8 | 4 | 1 | Yes | No |
|  | PN1B-8X8NH2 | 8 | 1 | 8 | 8 | 1 | Yes | No |
|  | PN3A-8X8FNH | 8 | 1 | 12 | 8 | 1 | No | Yes |
|  | PN3A-16X16FNH | 32 | 4 | 12 | 16 | 2 | Yes | Yes |
|  | PN3A-32FNH | 64 | 8 | 12 | 0 | 2 | Yes | Yes |
|  | PN3A-32X16FNH | 32 | 8 | 12 | 16 | 2 | Yes | Yes |
|  | PN3A-64FNH | 64 | 8 | 12 | 0 | 2 | Yes | Yes |
|  | PN3A-128FNH | 128 | 16 | 12 | 0 | 2 | Yes | Yes |

2-Megapixel - HD Analog

| | Model # | Lens | Mic | Voltage | Features | Mounts |
|--|-------------------|----------------------------------|-----|---------|---|---|
|  | PAR-A2MINITI28W | 2.8mm, Fixed | / | 12VDC | IR Range up to 32', IP66 | N/A |
|  | PAR-ALLDIRS2812D | 2.8 ~ 12mm, Motorized Auto-Focus | / | Dual | IR Range up to 98', Indoor | N/A |
|  | PAR-ALLELEV29 | 2.9mm | / | 12VDC | IR Range up to 32', Indoor | N/A |
|  | PAR-ALLTXIRA28WL | 2.8mm, Fixed | / | 12VDC | Audio Over Coax (AOC), IR Range up to 98', IP67 | IPM-JB6 IPM-TXWM1A |
|  | PAR-ALLTXIR28WL | 2.8mm, Fixed | / | 12VDC | 60' White Light Range, IP67 | IPM-JB6 IPM-TXWM1A |
|  | PAR-ALLTXIRA28 | 2.8mm, Fixed | • | 12VDC | Audio Over Coax (AOC), IR Range up to 98', IP67 | IPM-JB6 IPM-TXWM1A |
|  | PAR-C2LPR622D | 6 ~ 22mm, Motorized Auto-Focus | / | Dual | License Plate Recognition, IR Range up to 49', IP66 | IPM-LPRJB |
|  | PAR-C2PTZBXIRA550 | 5-50mm, Motorized Pan Tilt Zoom | / | 12VDC | IR Range up to 328', IP66 | N/A |
|  | PAR-TURRET28A | 2.8mm, Fixed | / | 12VDC | IR Range up to 65', IP66 | IPM-JB6 IPM-TXWM1A |
|  | PAR-TURRET28BA | 2.8mm, Fixed | / | 12VDC | IR Range up to 65', IP66 | IPM-JB6B IPM-TXWM1B |
|  | PAR-VARITURRETA | 2.8 ~ 12mm, Motorized Auto-Focus | / | 12VDC | IR Range up to 98', IP66 | IPM-JB4A, IPM-WALLMOUNT2 IPM-TXWM1A (Use w/IPM-JB4A) |

5-Megapixel - HD Analog

| | Model # | Lens | Mic | Voltage | Features | Mounts |
|--|-----------------------|----------------------------|-----|---------|---|------------------------------|
|  | PAR-ALL5BIRA27135D | 2.7 ~ 13.5mm, Motorized AF | / | Dual | 5-2 Megapixel, IR Range up to 197', IP67 | IPM-JBMINIBOX IPM-JBLARGE |
|  | PAR-ALL5TXIR18 | 1.8mm Lens | / | 12VDC | 5-2 Megapixel, 140° FOV, IR Range up to 65', IP66 | IPM-JBM1 |
|  | PAR-ALL5TXIRA27135D | 2.7 ~ 13.5mm, Motorized AF | / | Dual | 5-2 Megapixel, IR Range up to 98', IP67 | IPM-JBMINIBOX IPM-JBLARGE |
|  | PAR-ALL5TXIRA27135WLD | 2.7 ~ 13.5mm, Motorized AF | / | Dual | 5-2 Megapixel, 98' White Light Range, IP67 | IPM-JBMINIBOX IPM-JBLARGE |
|  | PAR-ALLBIRA650DN | 6 ~ 50mm, Motorized AF | / | Dual | 5-2 Megapixel, IR Range up to 361', IP67 | IPM-JBMINIBOX IPM-JBLARGE |

| | | | | | | |
|--|----------------------|----------------------------------|---|-------|--|---|
| | PAR-ALLDRIR28BD | 2.8mm, Fixed | / | Dual | 5-2 Megapixel, IR Range up to 65', IP67, Direct Connection to BNC or UTP | IPM-JBMINIBOX IPM-JBLARGE IPM-WALLFIXDOME |
| | PAR-ALLDRXIRA27135BD | 2.7 ~ 13.5mm, Motorized AF | / | Dual | 5-2 Megapixel, IR Range up to 98', IP67, Direct Connection to BNC or UTP | IPM-WALLVARDOME IPM-JBLARGE IPM-JBVARDOME |
| | PAR-C5BIR28 | 2.8mm, Fixed | / | 12VDC | IR Range up to 98', IP67 | IPM-JB6 |
| | PAR-C5BIR36AWL | 3.6mm, Fixed | • | 12VDC | Audio Over Coax (AOC), 60' White Light Range, IP67 | IPM-JB6 |
| | PAR-C5BIRA2812 | 2.8 ~ 12mm, Motorized Auto-Focus | / | 12VDC | IR Range up to 164', IP67 | IPM-JB6 |
| | PAR-C5DRIR28 | 2.8mm, Fixed | / | 12VDC | IR Range up to 65', IP66 | IPM-JB7 IPM-TXWM1A |
| | PAR-C5DRIRA2812 | 2.8 ~ 12mm, Motorized Auto-Focus | / | 12VDC | IR Range up to 98', IP67 | IPM-JB8 IPM-WALLMOUNT2 (Use w/IPM-JB8) |
| | PAR-C5TIR28 | 2.8mm, Fixed | / | 12VDC | IR Range up to 65', IP66 | IPM-JB6 IPM-TXWM1A |
| | PAR-C5TIR28B | 3.6mm, Fixed | • | 12VDC | IR Range up to 65', IP66 | IPM-JB6B IPM-TXWM1B |
| | PAR-C5TIR36AWL | 3.6mm, Fixed | • | 12VDC | Audio Over Coax (AOC), 60' White Light Range, IP67 | IPM-JB6 IPM-TXWM1A |
| | PAR-C5TXIRA2812 | 2.8 ~ 12mm, Motorized Auto-Focus | / | 12VDC | IR Range up to 164', IP66 | IPM-JB4A IPM-TXWM1A |




8-Megapixel - HD Analog

| | Model # | Lens | Mic | Voltage | Features | Mounts |
|--|-----------------|----------------------------------|-----|---------|---------------------------|---|
| | PAR-C8BIR28 | 2.8mm, Fixed | / | 12VDC | IR Range up to 98', IP66 | IPM-JB6 |
| | PAR-C8BIRA2812 | 2.8 ~ 12mm, Motorized Auto-Focus | / | 12VDC | IR Range up to 164', IP66 | IPM-JB6 |
| | PAR-C8DRIR28 | 2.8mm, Fixed | / | 12VDC | IR Range up to 65', IP66 | IPM-JB7 IPM-TXWM1A |
| | PAR-C8DRIRA2812 | 2.8 ~ 12mm, Motorized Auto-Focus | / | 12VDC | IR Range up to 98', IP66 | IPM-JB8 IPM-WALLMOUNT2 (Use w/IPM-JB8) |
| | PAR-C8TIR28 | 2.8mm, Fixed | / | 12VDC | IR Range up to 65', IP66 | IPM-JB6 IPM-TXWM1A |
| | PAR-C8TXIRA2812 | 2.8 ~ 12mm, Motorized Auto-Focus | / | 12VDC | IR Range up to 164', IP66 | IPM-JB4A, IPM-WALLMOUNT2 IPM-TXWM1A (Use w/IPM-JB4A) |

DVRs

| | Model # | BNC | HD Bays | Resolution | Bonus IP Channels | In | SMD | Single Channel Smart Analytic | Dual NIC |
|--|--------------------------------------|-----|---------|------------|-------------------|---------|-----------------|-------------------------------|----------|
| | PD1B-4NH2 | 4 | 1 | 5MP Lite | 2 | 16 Mbps | Yes | 1 | No |
| | PD1B-8NH2 | 8 | 1 | 5MP Lite | 4 | 32 Mbps | Yes | 1 | No |
| | PD1B-16NH2 | 16 | 2 | 5MP Lite | 8 | 32 Mbps | Yes | 1 | No |
| | PD1B-32NH | 32 | 4 | 5MP Lite | 8 | 40 Mbps | Yes (16ch Only) | 1 | No |
| | PD1C-32NH | 32 | 8 | 5MP Lite | 8 | 40 Mbps | Yes (16ch Only) | 1 | No |
| | PD2B-4NH | 4 | 1 | 8MP | 2 | 16 Mbps | Yes | 1 | No |
| | PD2B-8XNH2 | 8 | 2 | 8MP | 8 | 32 Mbps | Yes | 1 | No |
| | PD2B-16NH | 16 | 2 | 8MP | 8 | 32 Mbps | Yes | 1 | No |
| | PD2B-32NH (HDMI Independent Spot) | 32 | 8 | 8MP | 8 | 48 Mbps | Coming Soon | Coming Soon | Yes |

Server & Decoders

| | Model # | Max Live CH | Max Total CH | Main Output | Independent Views | Channels By Default | Channels Per HDMI |
|---|------------------|-------------|--------------|-------------|-------------------|---------------------|-------------------|
|  | PS1A-ENTERPRISE | 100 | 30000* | HDMI/VGA | Yes | 2048 | N/A |
|  | PS1A-MINISERVER2 | 36 | 256 | HDMI/VGA | Yes | 256 | N/A |
|  | PS1A-DECODERNH | 256 | N/A | HDMI | 4 | 256 | 64 |

*When using PS1A-TRANSFERSERVER

PVMs & Tablets



PAR-P2PVMCAM10:
10" PVM Monitor with
Built-in 2 Megapixel Camera
12VDC/PoE

PAR-P2PVMCAM27:
27" PVM Monitor with
Built-in 2 Megapixel Camera
DC12-24V/PoE++



PAR-P2TEMPTABLET:
2MP HD Temperature Measurement
Face Recognition Terminal

www.invidtech.com

ABOUT INVID TECH

The world wants to feel safe. InVid Tech offers products to Alert, Connect, & Secure You. You can stop potential issues before they become problems. Innovative Video Technology, InVid Tech, is a security equipment provider. We offer a wide array of products, including:

- NDAA Compliant Products
- Cloud & Local Storage
- IP & HD Analog Surveillance
- Mobile Solar Surveillance
- Facial Recognition Surveillance
- Thermal Surveillance
- Body/Covert Surveillance
- Interactive Collaborative Displays
- 4K & Standard Displays
- Healthcare Safety Technology
- Mobile Solar Surveillance
- Mobile Credentials
- Secure Electronic Lockers
- Security Solar Lighting
- Video Analytics & Central Management Software
- License Plate Recognition
- TAA Compliant Options
- Turnstiles
- Custom Products Available

We offer personal service, consulting, and support from start to finish. We have an experienced team in the United States, including Sales, Customers Service & Tech Support. We have reps nationwide that are available to assist wherever needed. We offer various programs, including Project Registration & Design & RMR, to help put more money in your pocket. InVid Tech is here to help you succeed.

Our products are easy-to-use and very easy to install. We offer plug & Play and P2P connectivity. InVid Tech offers entry-level systems and products with much more advanced features, such as Ai Technology with LPR, Facial & Human & Vehicle Classification. Systems can start with a single camera and expand into the thousands across regions.



Picture may represent the series, housing/camera style may vary. We reserve the right to make changes to improve our products at any time without notice; we are not responsible for misprints.