




## Paramont Series


# Adding a Device to the Paramont CMS AI 2.0 Utilizing The NAT QR Code

1. Login to your Paramont CMS AI 2.0 Software (Default credentials are username: admin password: 123456) After logging in select “Home” then “Resource Management.”

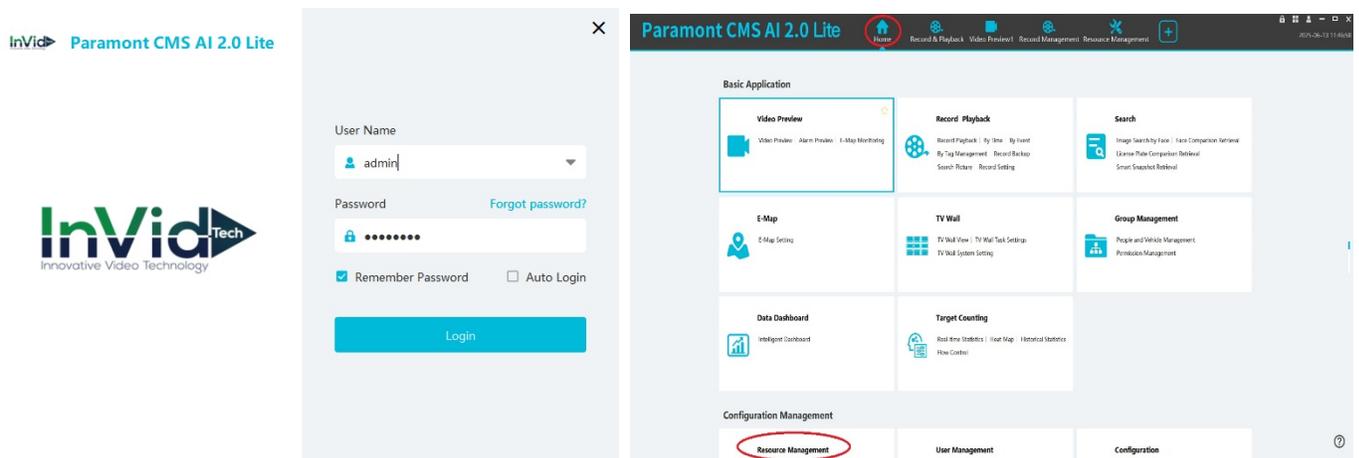


The image displays two screenshots from the Paramont CMS AI 2.0 Lite interface. The left screenshot shows the login page with the following fields: User Name (admin), Password (masked with dots), Remember Password (checked), and Auto Login (unchecked). A 'Login' button is at the bottom. The right screenshot shows the main dashboard with a navigation bar at the top. The 'Resource Management' option in the 'Configuration Management' section is circled in red.

2. Select Encoding Device (This is a DVR or NVR) then select “Add.”

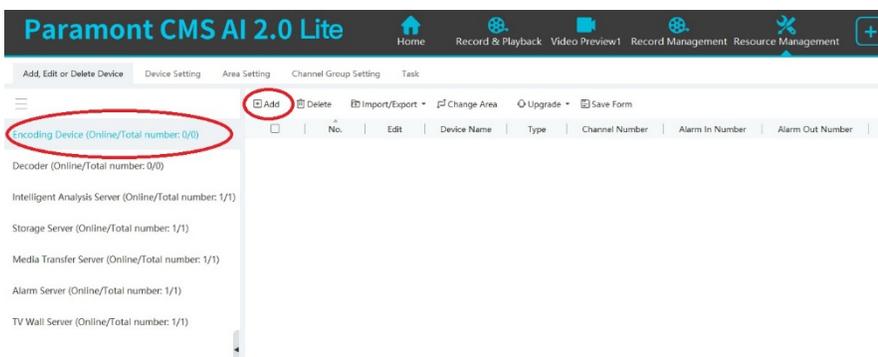


The image shows a screenshot of the Paramont CMS AI 2.0 Lite interface. The 'Add, Edit or Delete Device' section is active, and the 'Add' button is circled in red. Below this, the 'Encoding Device (Online/Total number: 0/0)' section is highlighted, showing a list of device types: Decoder, Intelligent Analysis Server, Storage Server, Media Transfer Server, Alarm Server, and TV Wall Server.


3. Select “Manually Add” then select the drop down box where it will currently display “IP Address” and select “Serial No.”

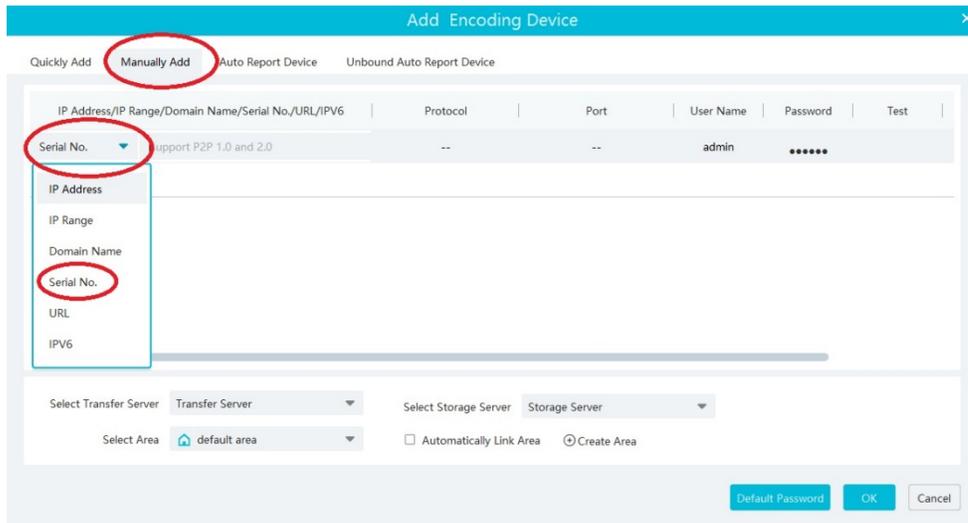

4. Input your Serial number/QR Code which can be gotten off the recorder from the NAT screen under the network settings of your recorder. Input your Username/Password for YOUR RECORDER. (this is not the same as the password when you log into the software this is the actual credentials to login to your NVR/DVR). Then click “Test” after the test succeeds click “Ok”, and then click “Ok” again.

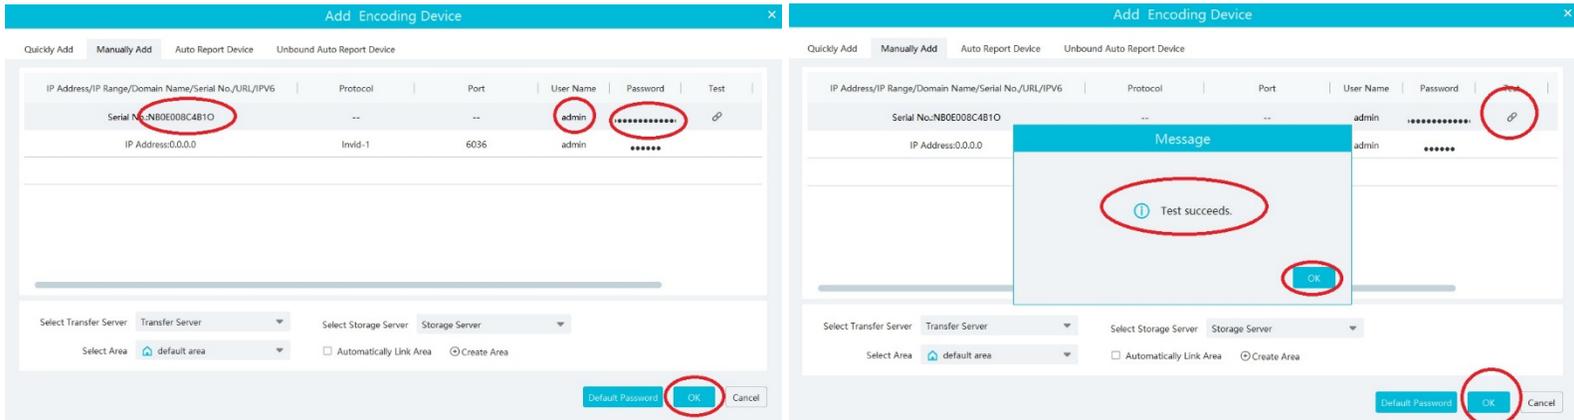

5. You should now see the device in your encoding devices wait for it to turn dark bold lettering signifying it is now online (you can also just the “online status” if this doesn’t come online within one minute just reboot your software this will help expedite it coming online.)

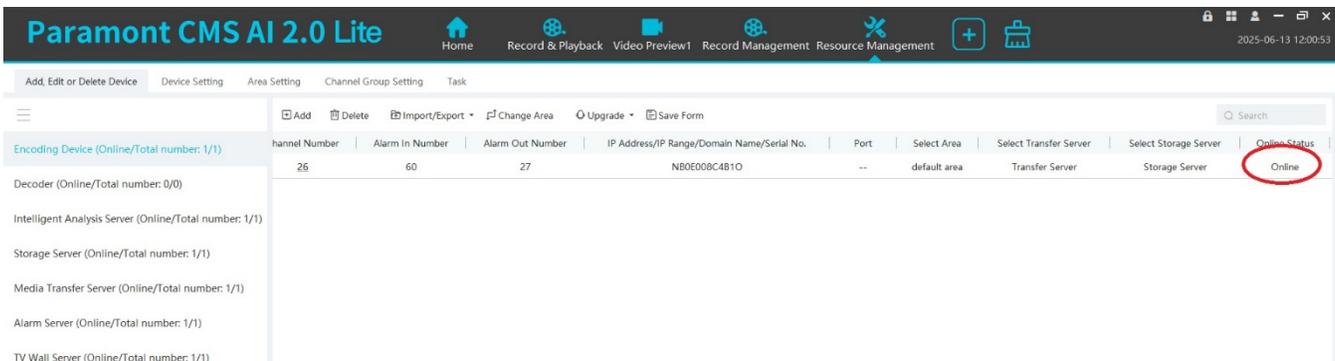

6. Lastly go to “Video Preview” open the default area tree by hitting the little plus sign symbol and drag and drop your cameras into the corresponding boxes. (You can also drag and drop “default area” to load in all your cameras based on how many windows you have displayed)

