




Paramont Series Cloud Management Portal

URL: <https://paramontcms.invidtech.com>

Uses your Paramont CMS Mobile App Account to Login

Purpose and Uses:

- The Paramont Cloud Management portal works in conjunction with the Paramont CMS Mobile App. Add, Delete or Access your devices not only from your mobile application but now from your PC as they work in synchronization.
- Have a PC that may not be able to run the CMS program, but you liked having the Device Management the CMS offered; you can now use the Cloud Management Portal instead.
- Shared Management. See what devices you have shared or what devices are shared to you all from the portal. You're no longer confined to a small mobile app screen

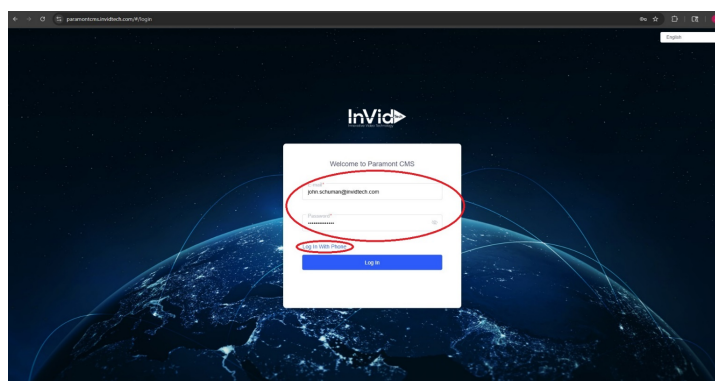

How to Login:

- Requires your ACCOUNT from Paramont CMS Mobile App. If you didn't create an account or haven't yet, you will not be able to use this portal. Please review the below video on how to create an account.
Currently the account must be created from the mobile app. In the next update, we will have an option to do from the web portal.
[Video: How to make an Account in Paramont CMS App](#)
[PDF: How to make an Account in Paramont CMS App](#)
- Login with your email or phone number, whichever you made an account with. Toggle between "Login with Phone" or "Login with Email"

Device Management and Access:

- See all your devices within your account
- Add/Edit/Delete devices within your account
- Access devices within your account
Depending on how the device is added to your account will depend on if you can view from web browser
NVRs have to be running v1.4.12 and above. DVRs must be running v1.4.3 and above
See notes at end of document
- To the far RIGHT you will see three dots, hover the mouse over the area and select "Access Web" to open a new page and a connection to the device.

Buildings & Residents

Device Management

Share Management

Device Management

Device List

Channel List

Device Source: All ▼

Device Status: All ▼

Q Please enter the device name

Device Name	Status	Model	Serial Number	Firmware Version	Channel Quantity
NVR: Joe_CloudAccount	Online	PDI1B-4NH	N442C9A8DCV	1.3.8.79343B250927.DOC.U1(441N)	0
PAR-P8PTZXR32NIH-AL_P2P	-	--	IBOAB0V11F92	--	--
NVR: WillThisConnectCustomer	Online	PN3A-64FNH	N155309GHSP	2.1.1.84129B251217.FDA_U1(84A880)	19
NVR: 6x8FNH	Online	PN3A-6X8FNH	N0B950SBPGO2	1.4.14.86981E200411.NOW.U1(84A18)	3

Edit

Delete

Access Web

- Devices that do not have “Access Web” are not supported or added with IP address.
See Notes at the end of document

Device Management						
Device List		Channel List				
Buildings & Residents		Add Device				
Device Management						
Share Management						
Device Source: All ▼		Device Status: All ▼ Please enter the device name				
Device Name	Status	Model	Serial Number	Firmware Version	Channel Quantity	
NVR: Jms_CloudAccount	Online	PDI-B-4NH	N44C06ACBVCV	1.3.7.793K38205627.DOC.U(14441N)	0	
PAS-PWP1ZXP3Z3N6-AJ_PPP	--	--	B5A8D5V11F92	--	--	
NVR: WtTHConnectCustomer	Online	PNGA-64F6H	N155309H-G3P	2.1.1.941296251217.FGA.U(164480)	19	
NVR: BaS6N1	Online	PNGA-83XF7H	N659506P-GQ2	1.4.14.86961E260401.NOW.U(132444)	3	
NVR: DeviceName2	Online	PNGA-16X16F	NC6B007BF5DQ	1.4.12.82056BE20923.NOR.U(132444)	2	
MVD - Stream	Online	DOLA-10F6H	NMF10F6W5DM2	2.0.0.72794967407615.FGA.U(11624260N)	18	

- To add a device, hit ADD DEVICE in top right corner

[illegible]

- You can add any device, via IP/DDNS, QR username and password or QR and Security Code
 - Though devices added via IP/DDNS or certain models may not be supported to view from the web, remember, it works in synchronization with app. So, adding here allows it to show within app to view from there as well

Add Device

Addition Method*

Verification Code / Security Code

Verification Code / Security Code

Serial Number

IP/Domain

Verification Code / Security Code*

Cancel Save

Share Management:

- If a device is added via QR and Security code, you can then share the device. To share the device, the other user must have an account made, whether by email or phone number
 - o You can tell when a device was added via QR and Security Code when it shows “Share”

Buildings & Residents

Device Management

Share Management

Device Management

Device List

Channel List

Device Source: All

Device Status: All

Q Please enter the device name

Device Name	Status	Model	Serial Number	Firmware Version	Channel Quantity
NWR_Ase_CloudAccess	Online	FC18-4BH1	NW4C026A2BCV	1.3.8.01630B207-DCU-U1584196	0
FAN_FPT_Z0010001-AI_FPT	—	—	8XW30V11F82	—	—
NWR_WifiCurrentCustomer	Online	PG24-66FH1	N150309-0P	2.1.1.841030E5217-F5A-U1584480	19
NWR_AuditN1	Online	PG24-600FH1	N6000000P04	1.1.14.8001630B206-NWR-U1584418	3
NWR_DeviceChannel2	Online	PG24-1001F	NC3800179157G	1.4.12.80000000003-NWR-U15834465	2
NWR_Sigapt	Online	PG24-302FH1	N1E10380CKP6	2.0.3.737380040H1-F5A-U1584480	18
NWR_Ery_Andrew_House	Online	PG24-30214FH1	N68A0406LDD3	1.4.13.80000000114-NWR-U15834465	8
NWR_PG24-1E316F81B2_Channel	Online	PG24-1001F81G2	N80730A00P0	1.4.14.8001630B2061-NWR-U15834465	30
NWR_risk_offline_Just	Online	PG24-66FH1	N17080300F0U	2.1.1.841030E5217-F5A-U1584480	45
DWR_vas_juice080	Online	FC18-30FH1	N60C70000G0U	1.4.3.819180000H1-D1E-U1584452	35
NWR_MyHealthcare	Online	N1E1001F-0-0	N600130000U	1.4.12.800000015151-NWR-U1584465	23

Edit

Delete

Access Web

Share

Share Device

Enter User

Email/Phone


Select Device and Channel

Please enter the user*

Cancel


Next

- View devices you have shared with others, view devices shared with you or see incoming shares not accepted yet (New Share)

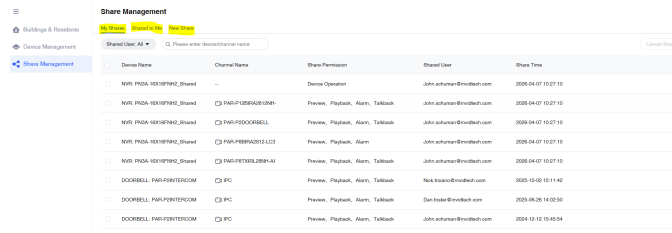

Device Name	Channel Name	Share Permission	Shared User	Share Time
NVR-PG3A-16X16P4M2_Shared	-	Device Operation	John.schuman@invidtech.com	2026-04-07 10:27:10
NVR-PG3A-16X16P4M2_Shared	PAR-P12BFA2012N6H	Preview, Playback, Alarm, Talkback	John.schuman@invidtech.com	2026-04-07 10:27:10
NVR-PG3A-16X16P4M2_Shared	PAR-P2DOORBELL	Preview, Playback, Alarm, Talkback	John.schuman@invidtech.com	2026-04-07 10:27:10
NVR-PG3A-16X16P4M2_Shared	PAR-P2BFA2012LC3	Preview, Playback, Alarm	John.schuman@invidtech.com	2026-04-07 10:27:10
NVR-PG3A-16X16P4M2_Shared	PAR-P2DOORBELL	Preview, Playback, Alarm, Talkback	John.schuman@invidtech.com	2026-04-07 10:27:10
DOORBELL-P4P-INTERCOM	PC	Preview, Playback, Alarm, Talkback	Nick.brown@invidtech.com	2025-10-20 10:11:40
DOORBELL-P4P-INTERCOM	PC	Preview, Playback, Alarm, Talkback	Dan.brown@invidtech.com	2025-06-26 14:02:30
DOORBELL-P4P-INTERCOM	PC	Preview, Playback, Alarm, Talkback	John.schuman@invidtech.com	2024-10-12 10:40:04

- Cancel a share completely or edit from your Share Management

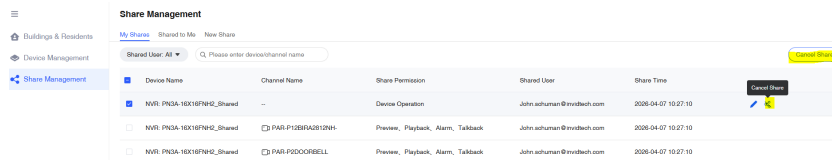

Device Name	Channel Name	Share Permission	Shared User	Share Time
NVR-PG3A-16X16P4M2_Shared	-	Device Operation	John.schuman@invidtech.com	2026-04-07 10:27:10
NVR-PG3A-16X16P4M2_Shared	PAR-P12BFA2012N6H	Preview, Playback, Alarm, Talkback	John.schuman@invidtech.com	2026-04-07 10:27:10
NVR-PG3A-16X16P4M2_Shared	PAR-P2DOORBELL	Preview, Playback, Alarm, Talkback	John.schuman@invidtech.com	2026-04-07 10:27:10

- Currently Permission/Channel sharing is not supported by the web portal. Once a device is shared, you can use the Paramount CMS mobile app to share the Permissions and Channels. This will change in the next update
[See Notes at the end of document](#)

The Paramount CMS Cloud Management Portal is newly launched, and we're actively working to make it better with each update. Thank you for your understanding and for being part of the journey with us.

Important Notes:

What is currently support:

- 1) NVRs and DVRs when adding **must be v1.4.12 and above for NVRs and v1.4.3 and above for DVRs**
 - o QR/P2P, Username and Password
 - o QR/P2P, Security Code
- 2) New IP Cameras that run v5.2.x and above (i.e. PAR-P6XXXNH-AI, PAR-PXXXX-LC3 models, PAR-P4CUBENH-AIT, ask your InVid Sales Rep for others)
- 3) You can manage your shared devices. See who you have shared and remove or add. (See number 2 under what is not currently supported)
- 4) If you use a MAC to log into web portal, your NVRs must be updated to v1.4.12 and DVRs must be updated to v1.4.5

What is currently not supported:

- 1) Older IPCs, PAR-P2INTERCOM and PAR-P2DOORBELL/PAR-P4DOORBELL
Older IPCs use a firmware version of v5.1.x
- 2) When adding an NVR or DVR with QR and Security Code, from the web portal you cannot assign rights. To assign rights, you must use the mobile app.
- 3) Devices added with IP address (LAN or WAN) or DDNS will not redirect you to a live view from the web portal but can still be added as it works in synchronization with the mobile app.