




Paramont Series




Setting up email notifications for the Paramont Series with Gmail

****This guide will be utilizing the web GUI, the only difference between here and the local monitor will be accessing settings (ON LOCAL MONITOR TO ACCESS SETTINGS GO TO CIRCLE WITH FOUR SQUARES IN BOTTOM LEFT THIS IS YOUR START BUTTON CLICK SETTINGS, THIS WILL GIVE YOU SAME OPTIONS AS FUNCTION PANEL IN THIS GUIDE)****


1. Select Function Panel/Network/Email

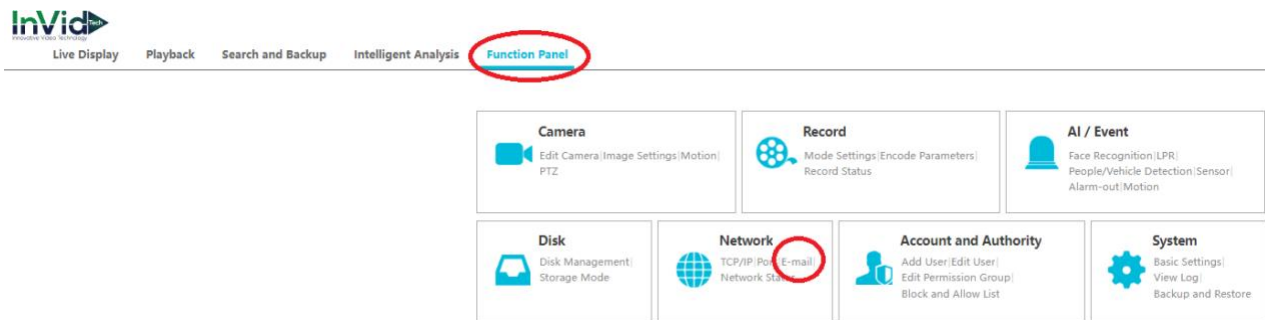


2. Input your SMTP Information ****Our email notifications system has been tested with Gmail and Yahoo so that is InVid’s recommendation. Outlook does work, it requires port 587 and TLS, but you will need to ensure no firewall or security settings are blocking the sending, InVid Tech cannot troubleshoot.**

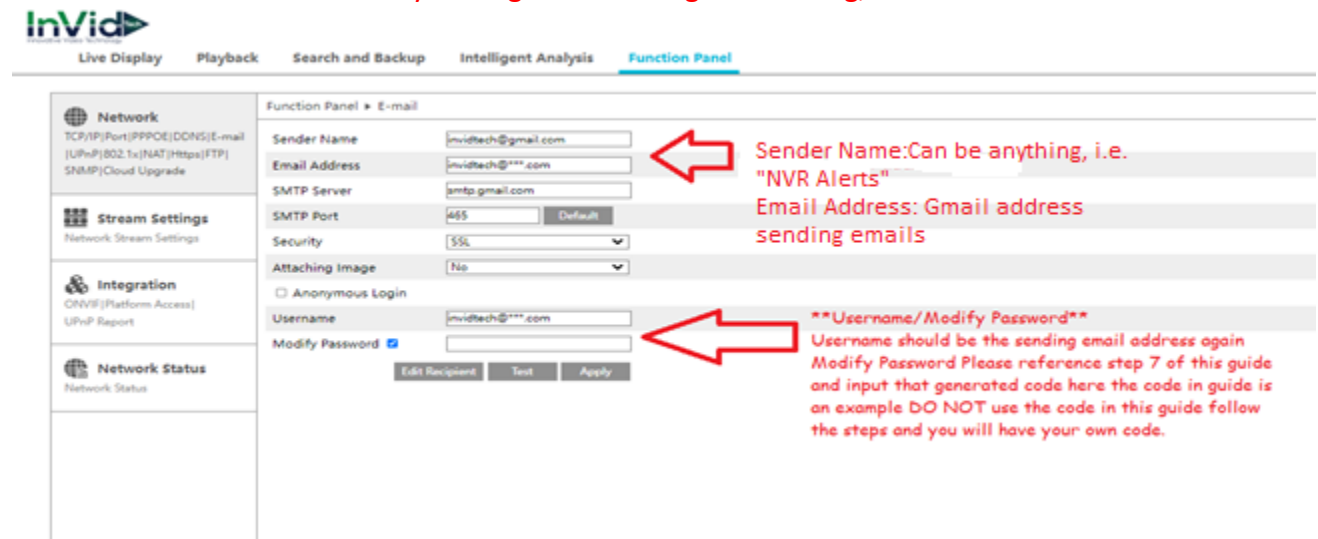


3. Login to your Gmail account and click “Manage you Google Account”. Select “Security” on the left and enable “2 – Step Verification”.

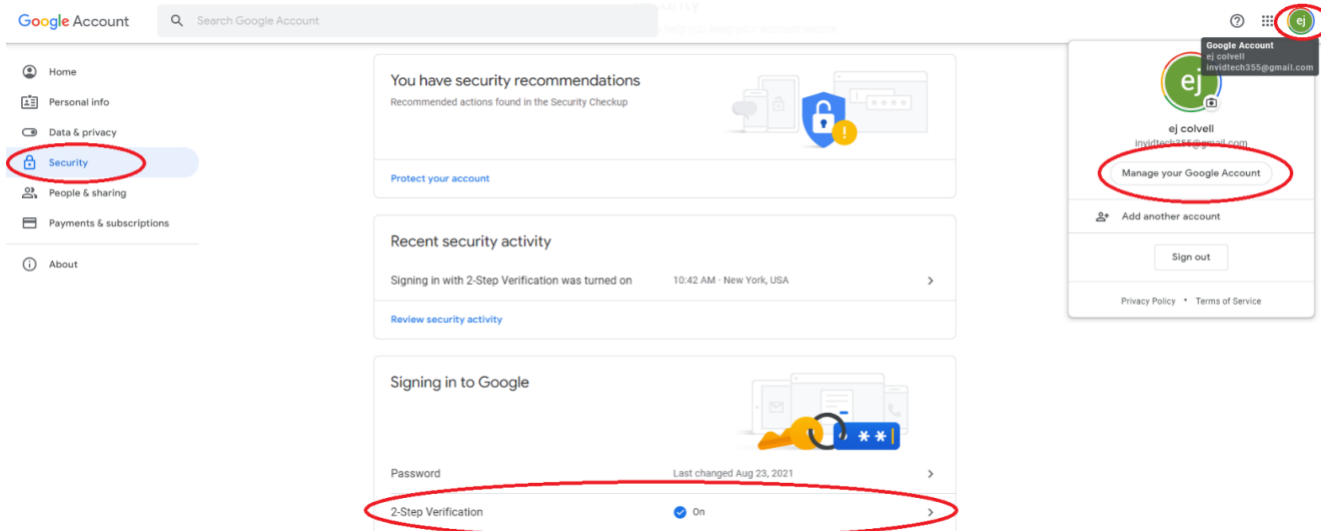


4. Click “App Password”

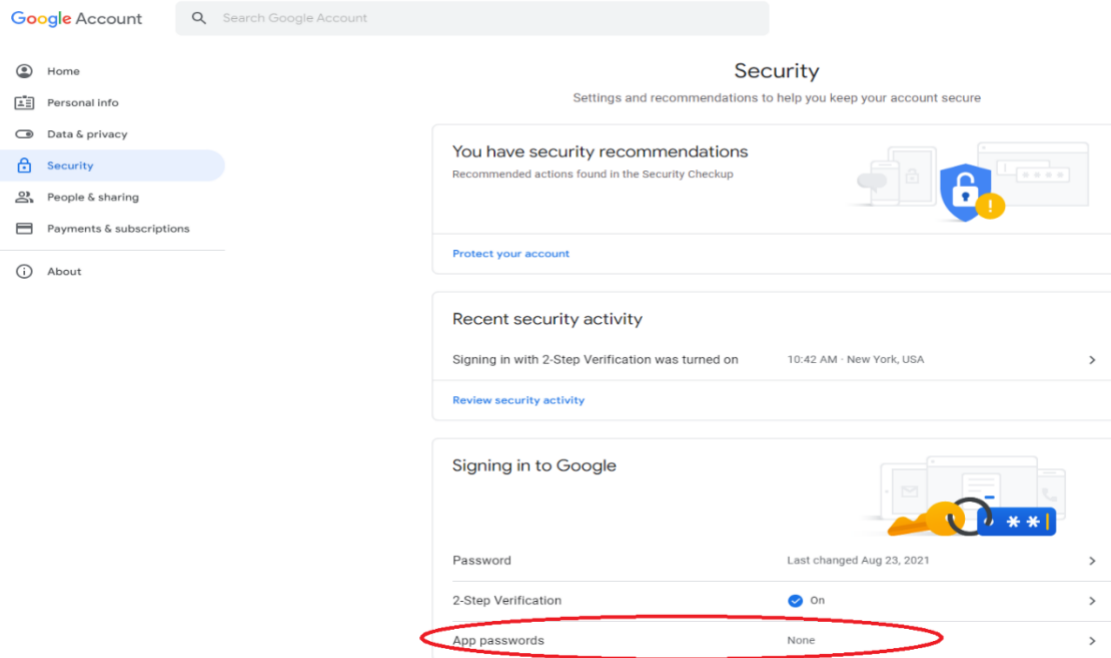


5. Select “Other (Custom name)” under select app

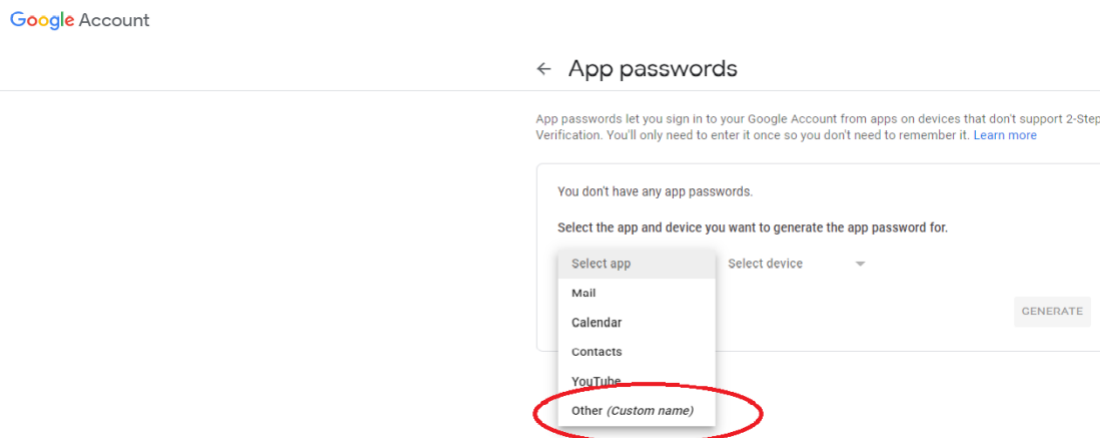


- Give the app a name, in this example we used InVidTech you can put whatever you want here it's just a label. Then click Generate.

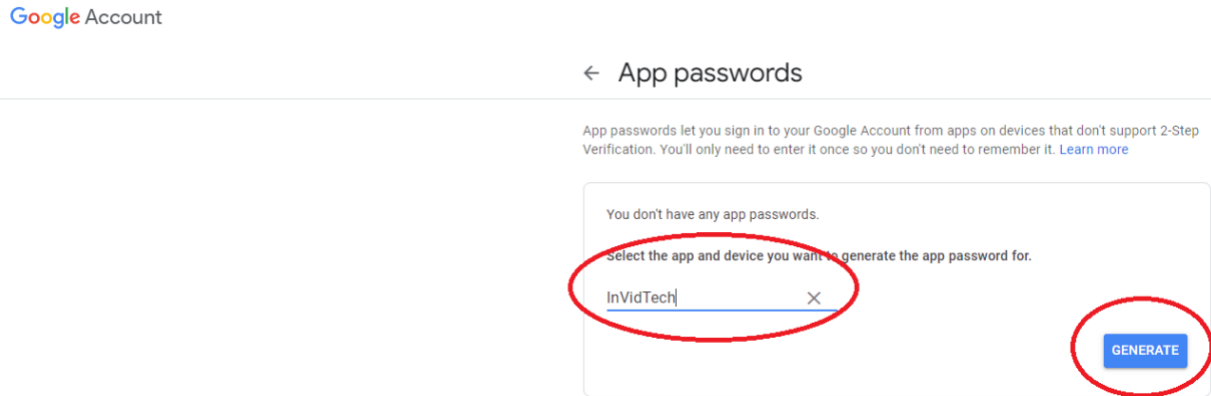

- Take your generated password and input this password into the modify password section of your SMTP Settings as stated in step 2.

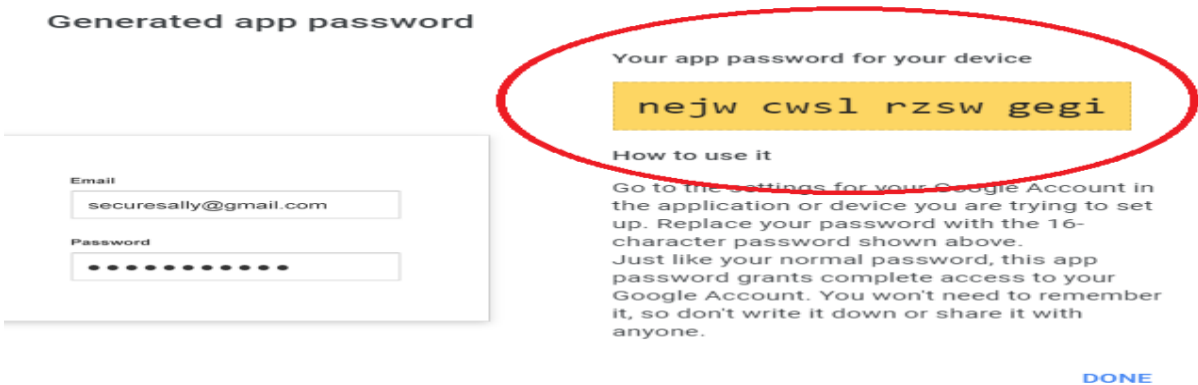

- If "Testing" the email, please make sure to input the 16 digit alphanumeric password generated, NOT the device password.

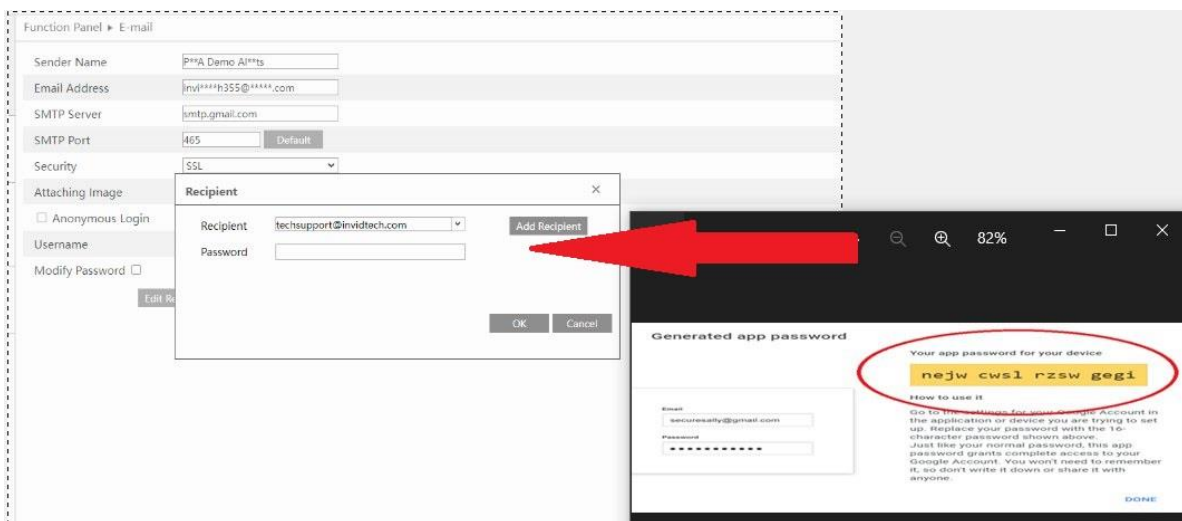

9. Defining email notifications. This photo below shows how to turn on for Motion, however you can turn on for most alarms, i.e. Motion, AI events, Video Loss and Exceptions



Function Panel » Motion

Camera Name	Schedule	Record	Snapshot	Audio	Push	Alarm-out	Preset Name	Buzzer	Pop-up Video	Email
PAR-P2LPR722	24x7	<input checked="" type="checkbox"/> Configure	<input checked="" type="checkbox"/> Configure	<None>	ON	<input type="checkbox"/> Configure	<input type="checkbox"/> Configure	OFF	OFF	ON
FACE722G1_Door	24x7	<input checked="" type="checkbox"/> Configure	<input checked="" type="checkbox"/> Configure	<None>	ON	<input type="checkbox"/> Configure	<input type="checkbox"/> Configure	OFF	OFF	ON
P8PANMULTI	24x7	<input checked="" type="checkbox"/> Configure	<input checked="" type="checkbox"/> Configure	<None>	ON	<input type="checkbox"/> Configure	<input type="checkbox"/> Configure	OFF	OFF	ON
PARP2PTZXIR25AI	24x7	<input checked="" type="checkbox"/> Configure	<input checked="" type="checkbox"/> Configure	<None>	ON	<input type="checkbox"/> Configure	<input type="checkbox"/> Configure	OFF	OFF	ON
PAR-P8PANINH	24x7	<input checked="" type="checkbox"/> Configure	<input checked="" type="checkbox"/> Configure	<None>	ON	<input type="checkbox"/> Configure	<input type="checkbox"/> Configure	OFF	OFF	ON
P25ACCTK722G2	24x7	<input checked="" type="checkbox"/> Configure	<input checked="" type="checkbox"/> Configure	<None>	ON	<input type="checkbox"/> Configure	<input type="checkbox"/> Configure	OFF	OFF	ON
VISPSPTZXIR2812NH	24x7	<input checked="" type="checkbox"/> Configure	<input checked="" type="checkbox"/> Configure	<None>	ON	<input type="checkbox"/> Configure	<input type="checkbox"/> Configure	OFF	OFF	ON
IP Camera01	24x7	<input checked="" type="checkbox"/> Configure	<input checked="" type="checkbox"/> Configure	<None>	ON	<input type="checkbox"/> Configure	<input type="checkbox"/> Configure	OFF	OFF	ON

Event Notification

Alarm-out|E-mail|Display|Buzzer
|Push Message|Audio|Light|
Alarm Server

AI Event

Face Recognition|LPR|
People|Vehicle Detection|More

General Event

Motion|Sensor|
Combination Alarm|PC Offline|
Exception Alarm

Alarm Status

Alarm Status