




PAR-P2DOORCHI

Doorbell Chime

Features

- Classic/tones
- A variety of mounting options, easy to install
- Adjustable volume and ring tone
- Battery powered/low battery reminder

Model	PAR-P2DOORCHI
Function	
Audio	Built-in speaker (4 in 89.7 dB, 3ft 73.4 dB, 6.5 ft 70.1 dB, 9.8 ft 69 dB)
Set Button	Pairing setting and ring tone selection
Volume Button	Yes
RF433	Yes transmission distance: up to 328 ft (100m) under an open environment without interference; through-wall capability: ≤ 2 walls
Indicator	Built-in indicator
Others	
Power	Two 1.5V AA Alkaline dry batteries
Environmental Protection	RoHS 2.0 REACH WEEE directive94/62/EC
Working Environment	-4°F ~ 122°F(-20°C ~ 50°C), Humidity:less than 95% (non-condensing)
Dimensions(mm)	Ø 2.87 x 1.26 in (Ø73mm x32mm)
Weight (net)	Approx. .13 lbs (60g)
Installation	Wall mounting, desktop
Use with	PAR-P2DOORBELL & PAR-P4DOORBELL

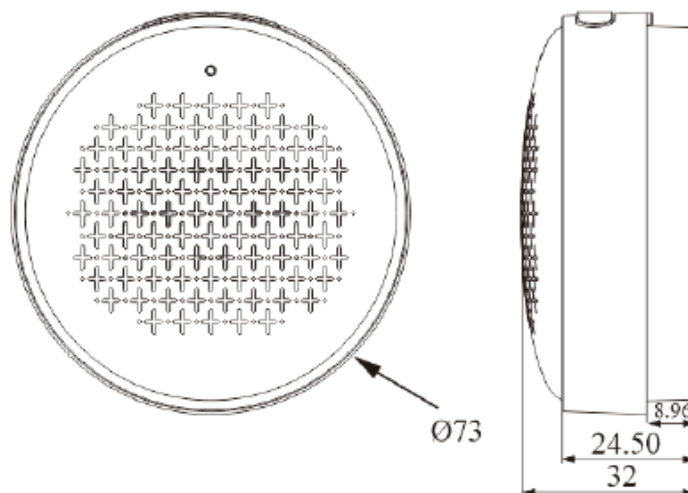

Ordering Information

PAR-P2DOORCHI: Doorbell Chime