## IPM-KEYBOARD10NH
Network Keyboard

Features

- 10.1 inch capacitive touch screen

- H.264/H.265 decoding ; single screen display in platform mode; a maximum of 4-screen display in PTZ mode

- Supports viewing images on the touch screen or outputting images on the external monitor via HDMI interface

- ONVIF protocol supported

- The full range of PTZ cameras can be connected via the network

- Supports PTZ control, preset, cruise and track setup and calling

- Up to 1024 devices can be added

- HDMI Looping Output

Model	IPM-KEYBOARD10NH
Operating system	Android 6.0
Screen size	IPS 10.1 inch screen, 1280*800 capacitive touch screen
Display	HDMI 4K@30fps
Decoding capability	Platform mode: Max.H.265 1CH 1080p@30fps PTZ mode: Max.H.265 1CH 4k@30fps, H.264 1CH 1080P@60fps or 4CH 720p@30fps;
Protocol	ONVIF 2.4 (Profile G)
Function	Up to 1024 devices can be added in PTZ mode; PTZ control: preset/cruise/scan. Supports the access of surveillance platform in platform mode; The plan, screen display, live view, PTZ and playback in the TV wall management of a platform can be controlled
System settings	Supports language settings, password modification, date and time settings and USB flash disk upgrade; restore to factory default setting
Power	Standard 5.5/2.1 Power interface, DC 12V2A±10%
Interfaces	1 RJ45 Ethernet port; 1 HDMI looping output(V 1.3); 1 USB2.0 port; 1 standard 3.5mm headphone jack
Operation interface	4D Joystick, Knob, Buttons
Power consumption	<15W
Standby current	<100mA
Mean time between failures	>30000h
Working humidity	10%-90%(RH)
Working temperature	14°F ~ 104°F (-10°C ~ 40°C)
Storage temperature	-40°F ~ 140°F (-40°C ~ 60°C)
Dimensions	17.7 x 7 x 4.5 in (450x179x115 mm)
Net weight	Approx. 3.1 lbs (1.388 kg)
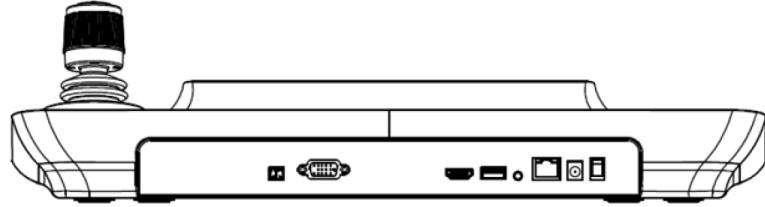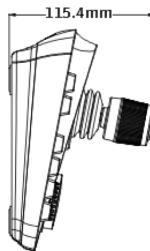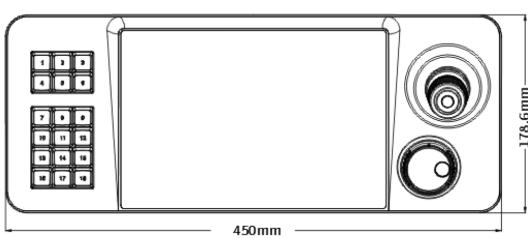
Ordering Information
IPM-KEYBOARD10NH: Network Keyboard