



PN1A-16X16-2NH2


16 Ch NVR with 16 Plug & Play Ports, 160 Mbps, 2 HD Bays, 4k

Features

- 16 Plug & Play Ports for easy camera setup PoE (Power Over Ethernet) available on all ports
- Up to 8 Megapixel Resolution Recording
- 160 Mbps Bit Rate Input
- Supports up to 16 channel simultaneous playback
- Smart Analytic Support/ AI by ONVIF
- Local HDMI main monitor output with 4K support
- Local VGA main monitor output up to 1080p
- True P2P Connectivity with QR Code Connect
- Multiple video search options including Smart Search for quick retrieval of footage.
- H.265S/ H.265+/ H.265/ H.264
- 2 Hard Drive Bays
- Free iOS & Android Apps for Smart Phones & Tablets
- Free Central Management Software (CMS) to manage multiple units & sites from a single platform
- Free MAC client software to easily manage your system from your Apple computer
- NDAA Compliant

System	PN1A-16X16-2NH2
OS	Embedded Linux
Video	
Network Input	16CH IPC input
Network Input Resolution	8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF
Output	HDMI × 1: 3840 × 2160 / 1920 × 1080 / 1280 × 1024/ 1024 × 768 VGA: 1920 × 1080 / 1280 × 1024/ 1024 × 768
Screen Display Mode	1/4/6/8/9/13/16
Compression	H.265S /H.265+ / H.265 / H.264
Audio	
Network Input	16 CH IPC audio input
Local Input	RCA × 1 (for two-way audio)
Local Output	RCA × 1
Compression	G.711(U/A)
Record	
Resolution	8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF
Frame Rate	NTSC:30fps; PAL:25fps
Playback	
Simultaneous Playback	Max.16 CH
Search	Time slice / time / event / tag / smart search
Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
Function	Play, pause, FF, FB, digital zoom, etc.
Decoding Capability	
Live View/ Playback	1×8MP@30fps; 6×1080P@30fps
Alarm	
Mode	Manual, sensor, motion, exception, smart events
Input	Supports IPC alarm input
Output	Supports IPC alarm output
Triggering	Record, snap, preset, e-mail, etc.

Network	
Interface	RJ 45 × 1 (10/100/1000Mbps)
Protocol	TCP / IP, IPv4, IPv6, UDP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, HTTP, SMTP, HTTPS, 802.1x, RTSP, RTP, RTCP, Web-Socket, SNMP, IGMP, ONVIF
Incoming/ Outgoing Bandwidth	160/160(Mbps) *When the AI function of the IPC is enabled, the actual incoming bandwidth(max.bitrate) is more than the set value in the NVR.
Client Connection	Max. 64 users access
Face	
Face Detection Performance (AI by IPC)	16 CH (NH-AI Models)
Face Detection Performance (AI by Device ONVIF)	2 CH/ 2MP
Face Match Performance	No (Does NOT Support Facial Recognition)
Statistical Graph of Information	Bar graph
Statistical Mode of Information	Statistics by day, week, month, quarter as well as customized time period
Video Structure Analysis	
Human/Vehicle Classification (AI by IPC)	Up to 16 CH
Human/Vehicle Classification (AI by Device)	2 CH
Human/Vehicle Attribute Analysis	Yes (AI by IPC)
Other Functions	
Fisheye	Supports fisheye dewarping via Web Client and mobile APP
Plate Recognition (AI by IPC)	Up to 16 CH
Mobile Device	
OS	iOS, Android
Storage	
HDD Interface	SATA3.0 × 2, up to 18TB
Backup	
Local Backup	USB, USB To HDD (1TB Max)
Network Backup	Yes
Port	
USB	USB 2.0 × 2, USB to
Remote Controller	Included
PoE	
PoE Ports	100M RJ45 × 16
Standards	IEEE802.3AF/AT
Output Power	≤ 150W
Others	
Power Supply	DC 48V/3.75A
Consumption	≤ 10W (without HDD)
Dimensions (W × D × H)	15 x 10.6 x 1.8In (380 × 268 × 45 mm)
Working Environment	14°F ~ 122°F (-10°C ~ 50°C)10% ~ 90% humidity
Certificate	CE, FCC, ETL: 5025761
Environmental Protection	Complies with Directive EU RoHS, REACH and WEEE

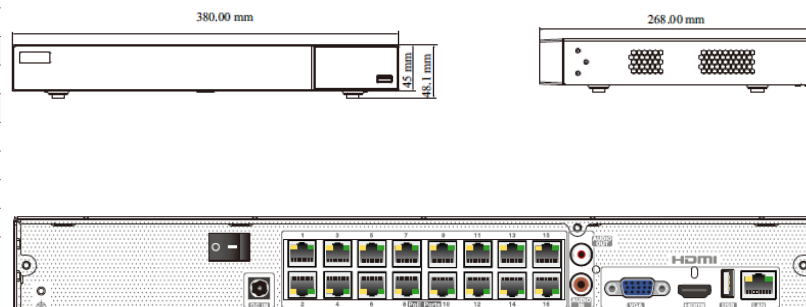

Ordering Information

PN1A-16X16-2NH2: 16 Ch NVR with 16 Plug & Play Ports

InVid Tech, reserves the right to make changes to improve our products at any time without notice; we are not responsible for misprints.