



PAR-C5BIRA28


5 Megapixel TVI/AHD/CVI/Analog 960h, Outdoor Bullet, IR Range up to 98', D-WDR, 12VDC, Audio Over Coax (AoC)

Features

- 5 Megapixel Resolution
- Built-in Mic: Audio Over Coax**
- All-in-One Technology (TVI/AHD/CVI/Analog 960h)
- Fixed Lens
- True Day/Night with IR Range up to 98'
- D-WDR
- IP67 Weatherproof
- 12VDC Operation
- Up The Cable (UTC) Function
- Through InVid Tech DVR: Free App, CMS & MAC Client
- NDAA Compliant

** With use of Paramont (Version 1.3.8 and above)/ Vision DVRs. TVI Only.

Camera	PAR-C5BIRA28
Image Sensor	1 / 2.5" CMOS
Resolution	5MP/4MP
Image Size	Max. 2944 × 1656 (16:9)
Video Output	AHD / TVI / CVI / CVBS
Default Video Output	TVI
Image System	PAL / NTSC
Electronic Shutter	Auto; 1/50s~1/100000s (PAL); 1/60s~1/100000(NTSC)
IR Distance	98'
Frame Rate	TVI: 2944×1656@20fps, 2560×1440@25fps/30fps AHD: 2944×1656@20fps, 2560×1440@25fps/30fps CVI: 2560×1440@25fps/30fps CVBS: PAL/NTSC
Min. Illumination	Color: 0.01lux@F1.2, AGC ON; B/W: 0 lux with IR
Lens	2.8 mm
Lens Mount	M12
S / N Ratio	≥52dB (AGC OFF)
Ingress Protection	IP 67
Audio	
Audio	Built-in Mic, Audio Over Coax (AoC)
Camera Audio	TVI Support
Audio Sensitivity	-36db
Functions	
Function Control	OSD (UTC Control)
Day & Night	ICR
Digital WDR	Yes
Digital NR	Yes, 2D DNR
AGC	Yes
Auto White Balance	Yes
BLC	Yes
HLC	Yes
Sharpness	Yes
Smart LED	Yes
Image Setting	Yes
Defect Correction	Auto
Language	Chinese and English
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~80°; Rotation: 0°~360°
Others	
Power Supply	DC12V (± 15%)
Power Consumption	IR OFF : < 1W; IR ON : < 4W
Working Environment	-22°F ~ 122°F (- 30 °C ~ 50 °C), 10 % ~ 90 % (relative humidity)
Dimensions	6.6 x 2.7 x 2.7 in (167.5 x 69 x 69mm)
Weight (net)	Approx. .8lbs (0.36KG)

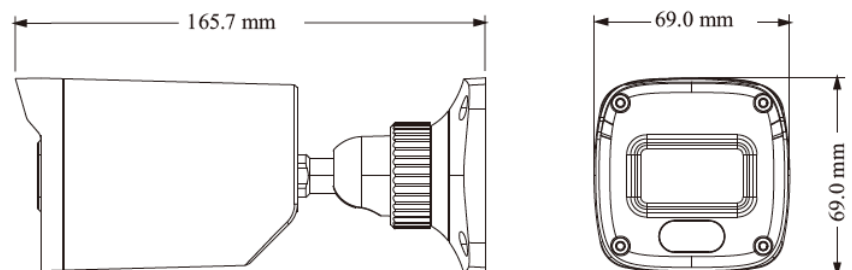

Ordering Information

PAR-C5BIRA28: 5 Megapixel Bullet, 2.8mm