


PAR-ALLDRSSIRA2812

2 Megapixel All-in-One Outdoor Stainless Steel Vandal Dome, Auto-Focus Motorized 2.8-12mm, 75' IR Range, 12VDC

Features

- 2 Megapixel 1080p (TVI/AHD/CVI) Resolution
- All-in-One Technology (TVI/AHD/CVI/Analog 960h) w/Separate Analog BNC
- Motorized Auto-Focus 2.8-12mm Lens
- True Day/Night
- 75' IR Range
- Up The Cable (UTC) Function
- Stainless Steel Housing (Grade Steel | AISI 316)
- IP68 Waterproof
- IK10 Vandal Resistant
- 12VDC Only Operation
- NDAA Compliant

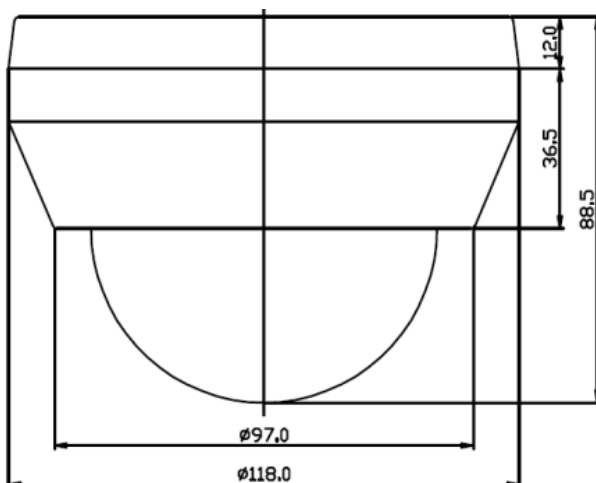

Model	PAR-ALLDRSSIRA2812
Image Sensor	1/2.8" Sony Exmor CMOS image sensor
Active Pixel	1920(H) x 1080(V)
Resolution	1080p@30fps/1080p@25fps
Min. Illumination	Color: 1.0 lux, BW : 0.5 lux, Color DSS: 0.002 lux, BW DSS : 0.0008 lux
Scanning System	Progressive
Video Output	AHD, CVI, TVI : 1080P Analog: NTSC/ PAL CVBS
S/N Ratio	More than 50dB (AGC off)
AGC	Off/O - 15
Shutter Speed	AUTO/MANUAL(1/50(60) ~ 1/50,000 sec)
SENS-UP	Off/X2 - X30
Brightness	0 - 100
Backlight	Off/BLC/HSBLC
D-WDR	Off/O ~ 8
Defog	Off/Auto
Day & Night	Auto/Color/B&W/EXTERN
White Balance	ATW/AWC/INDDOR/OUTDOOR/Manual/AWB
DNR	Off/Low/Middle/High
Mirror	Off/MIRROR/V-FLIP/ROTATE
Sharpness	0 -10 steps
Privacy Mask	4 Masks
Motion Detection	Off/On
Language	English/Chinese/Germany/French/Italian/Spanish/Polish/Russian/Portuguese/Dutch/Turkish
Housing	IP68 Waterproof, IK10 Housing, Grade Steel AISI 316
IR Range	75'
Power Source	DC12V ±10%
Power Consumption	Max 4.0 Watt at IR on
Operating Temperature	-4°F ~ 140°F (-20°C ~ 60°C)
Operating Humidity	10% to 85%
Lens	2.8~12mm DC auto iris motorized MP lens
Dimension (Φ x W x H)	Φ3.14 x 4.67 x 3.48 in (Φ80 x118 x 88.5mm)
Weight	2.88lbs (1310g)

Ordering Information

PAR-ALLDRSSIRA2812: 2 Megapixel Dome, 2.8-12mm Motorized